



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF
(H8DGPU-F, AMD Opteron 6338P)

SPECfp[®]_rate2006 = 345

SPECfp_rate_base2006 = 314

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Aug-2012

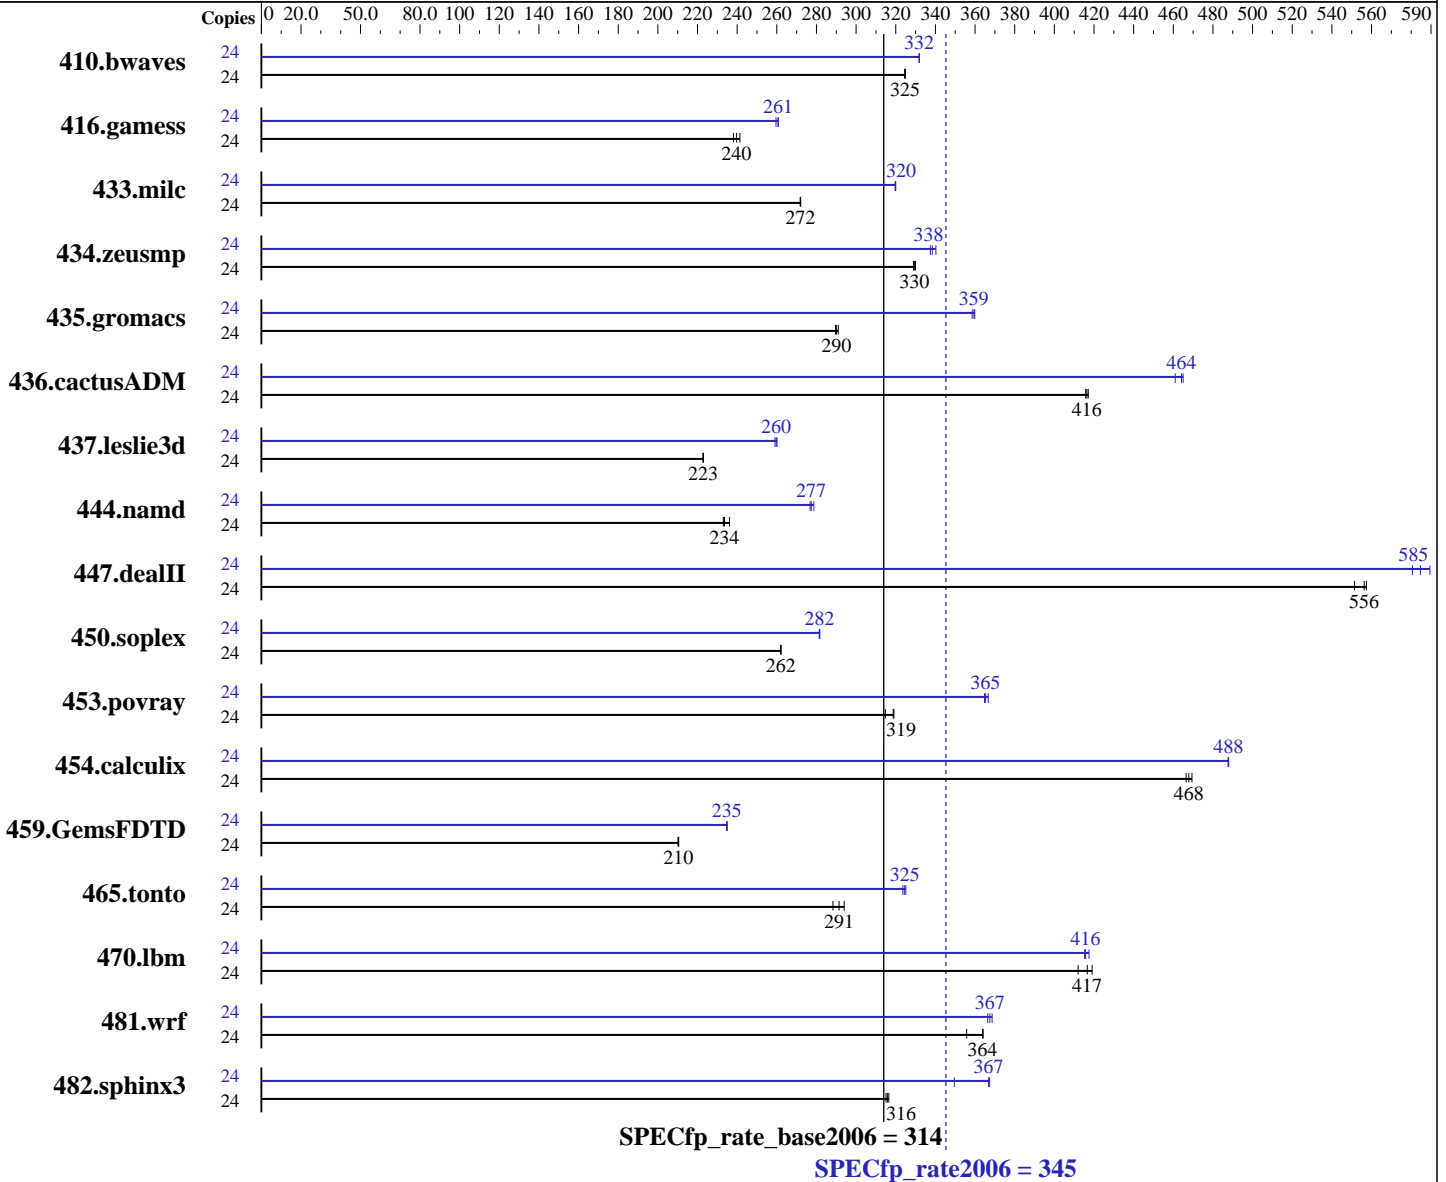

Hardware

CPU Name: AMD Opteron 6338P
 CPU Characteristics: AMD Turbo CORE technology up to 2.80 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips

Continued on next page

Software

Operating System: CentOS 6.4,
Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64
Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF
(H8DGPU-F, AMD Opteron 6338P)

SPECfp_rate2006 = 345

SPECfp_rate_base2006 = 314

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Aug-2012

Primary Cache: 384 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores

Other Cache: None

Memory: 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 500 GB SATAIII, 7200 RPM

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	<u>1004</u>	<u>325</u>	1004	325	1005	325	24	<u>983</u>	<u>332</u>	983	332	983	332
416.gamess	24	<u>1960</u>	<u>240</u>	1973	238	1947	241	24	1810	260	<u>1803</u>	<u>261</u>	1802	261
433.milc	24	811	272	810	272	<u>810</u>	<u>272</u>	24	<u>689</u>	<u>320</u>	689	320	689	320
434.zeusmp	24	<u>663</u>	<u>330</u>	664	329	662	330	24	642	340	647	337	<u>645</u>	<u>338</u>
435.gromacs	24	589	291	592	290	<u>591</u>	<u>290</u>	24	<u>477</u>	<u>359</u>	478	359	476	360
436.cactusADM	24	<u>689</u>	<u>416</u>	688	417	690	416	24	622	461	617	465	<u>618</u>	<u>464</u>
437.leslie3d	24	1012	223	<u>1012</u>	<u>223</u>	1012	223	24	867	260	<u>869</u>	<u>260</u>	871	259
444.namd	24	815	236	<u>824</u>	<u>234</u>	826	233	24	691	279	695	277	<u>694</u>	<u>277</u>
447.dealII	24	<u>494</u>	<u>556</u>	498	551	493	557	24	<u>470</u>	<u>585</u>	473	581	466	589
450.soplex	24	764	262	764	262	<u>764</u>	<u>262</u>	24	711	281	710	282	<u>711</u>	<u>282</u>
453.povray	24	406	315	<u>401</u>	<u>319</u>	400	319	24	350	365	<u>349</u>	<u>365</u>	348	367
454.calculix	24	424	466	<u>423</u>	<u>468</u>	422	469	24	406	488	<u>406</u>	<u>488</u>	406	488
459.GemsFDTD	24	1210	211	1212	210	<u>1210</u>	<u>210</u>	24	1085	235	1084	235	<u>1084</u>	<u>235</u>
465.tonto	24	<u>810</u>	<u>291</u>	819	288	803	294	24	730	324	726	325	<u>728</u>	<u>325</u>
470.lbm	24	<u>792</u>	<u>417</u>	800	412	787	419	24	<u>793</u>	<u>416</u>	794	415	790	417
481.wrf	24	736	364	754	356	<u>737</u>	<u>364</u>	24	732	366	727	369	<u>729</u>	<u>367</u>
482.sphinx3	24	1478	317	<u>1481</u>	<u>316</u>	1485	315	24	<u>1275</u>	<u>367</u>	1338	350	1273	367

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF
(H8DGPU-F, AMD Opteron 6338P)

SPECfp_rate2006 = 345

SPECfp_rate_base2006 = 314

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2013
Hardware Availability: Jan-2014
Software Availability: Aug-2012

Operating System Notes (Continued)

```
Set vm/nr_hugepages=21504 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/home/cpu2006/amd1206-rate-libs-revA/32:/home/cpu2006/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF
(H8DGU-F, AMD Opteron 6338P)

SPECfp_rate2006 = 345

SPECfp_rate_base2006 = 314

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Aug-2012

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1

C++ benchmarks:

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off
-LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF
(H8DGPU-F, AMD Opteron 6338P)

SPECfp_rate2006 = 345

SPECfp_rate_base2006 = 314

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Aug-2012

Peak Portability Flags (Continued)

435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
 -fno-second-underscore

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
 -IPA:plimit=7000 -IPA:callee_limit=1200
 -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
 -march=bdver1

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
 -IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mso

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
 -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
 -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
 -mso -march=bdver2

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
 -CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
 -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
 -OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.dealIII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
 -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
 -CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
 -march=bdver1

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
 -LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
 -m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF
(H8DGPU-F, AMD Opteron 6338P)

SPECfp_rate2006 = 345

SPECfp_rate_base2006 = 314

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2013
Hardware Availability: Jan-2014
Software Availability: Aug-2012

Peak Optimization Flags (Continued)

450.soplex (continued):

-march=bdver1

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bd=2m:heap=2m -CG:cmp_peep=on -march=bdver1

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
-WOPT:sib=on -march=bdver1

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bd=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bd=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bd=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver1 -LNO:simd=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint
-GRA:optimize_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m
-march=bdver1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF
(H8DGPU-F, AMD Opteron 6338P)

SPECfp_rate2006 = 345

SPECfp_rate_base2006 = 314

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
        -WOPT:sib=on -march=bdver1
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-Supermicro-platform-rate-revC-I.html>
<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-Supermicro-platform-rate-revC-I.xml>
<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:43:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 March 2014.