



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2670 v2, 2.50 GHz)

SPECint®2006 = 56.8

SPECint_base2006 = 52.6

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

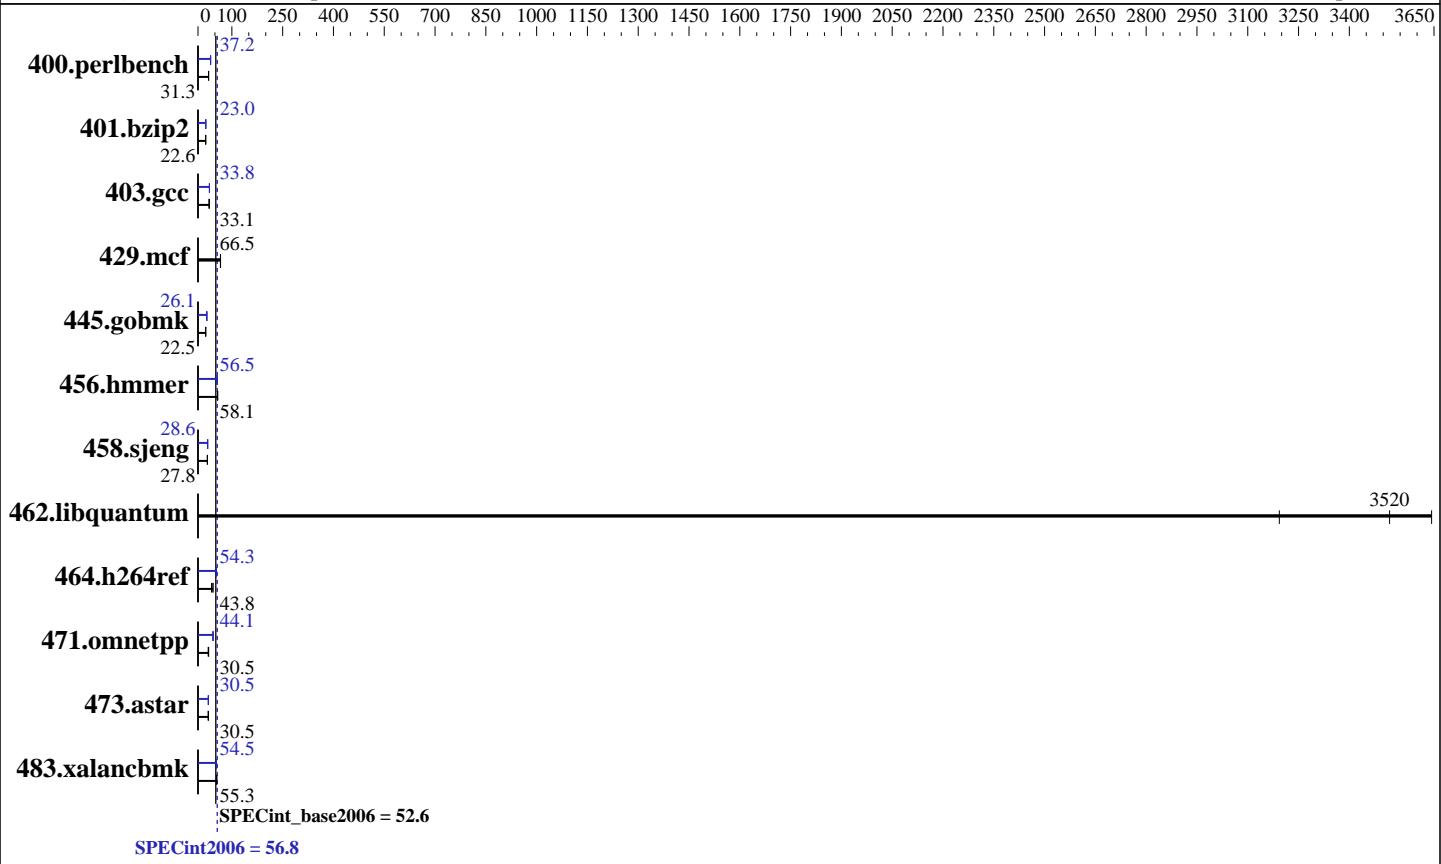

Hardware

CPU Name: Intel Xeon E5-2670 v2
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2500
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler: 2.6.32-358.el6.x86_64
Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2670 v2, 2.50 GHz)

SPECint2006 = 56.8

SPECint_base2006 = 52.6

CPU2006 license: 11

Test date: Feb-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	314	31.1	312	31.3	312	31.3	263	37.2	262	37.2	262	37.3
401.bzip2	427	22.6	425	22.7	427	22.6	420	23.0	419	23.0	420	23.0
403.gcc	243	33.1	243	33.1	244	33.0	238	33.8	238	33.8	239	33.7
429.mcf	138	66.2	137	66.6	137	66.5	138	66.2	137	66.6	137	66.5
445.gobmk	454	23.1	469	22.3	466	22.5	402	26.1	402	26.1	402	26.1
456.hmmer	161	58.1	161	58.1	163	57.4	165	56.5	167	55.9	165	56.7
458.sjeng	437	27.7	436	27.8	436	27.8	424	28.6	424	28.6	424	28.6
462.libquantum	5.69	3640	6.49	3190	5.89	3520	5.69	3640	6.49	3190	5.89	3520
464.h264ref	555	39.8	498	44.4	505	43.8	408	54.3	408	54.2	408	54.3
471.omnetpp	198	31.5	205	30.5	205	30.5	139	45.0	142	44.0	142	44.1
473.astar	230	30.5	231	30.4	230	30.5	230	30.5	230	30.5	229	30.7
483.xalancbmk	125	55.3	125	55.3	125	55.1	126	54.7	127	54.5	127	54.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode

Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Hyper-Threading set to Disabled

Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191
running on td-2 Fri Feb 21 22:41:20 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2670 v2 @ 2.50GHz
2 "physical id"s (chips)

20 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2670 v2, 2.50 GHz)

SPECint2006 = 56.8

SPECint_base2006 = 52.6

CPU2006 license: 11

Test date: Feb-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes (Continued)

```
caution.)  
    cpu cores : 10  
    siblings   : 10  
    physical 0: cores 0 1 2 3 4 8 9 10 11 12  
    physical 1: cores 0 1 2 3 4 8 9 10 11 12  
    cache size : 25600 KB  
  
From /proc/meminfo  
MemTotal:      264642980 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
/usr/bin/lsb_release -d  
Red Hat Enterprise Linux Server release 6.4 (Santiago)  
  
From /etc/*release* /etc/*version*  
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server  
  
uname -a:  
Linux td-2 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64  
x86_64 x86_64 GNU/Linux  
  
run-level 3 Feb 21 22:38  
  
SPEC is set to: /home/SPECcpu-new  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/mapper/vg_td2-lv_home  
          ext4   380G  231G  131G  64%  /home  
  
Additional information from dmidecode:  
BIOS IBM -[TDE133HT2-1.30]- 08/27/2013  
Memory:  
16x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank  
  
(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"
OMP_NUM_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2670 v2, 2.50 GHz)

SPECint2006 = 56.8

SPECint_base2006 = 52.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/sh -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2670 v2, 2.50 GHz)

SPECint2006 = 56.8

SPECint_base2006 = 52.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hammer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch`
`-ansi-alias`

401.bzip2: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch`
`-ansi-alias`

403.gcc: `-xAVX -ipo -O3 -no-prec-div -inline-calloc`
`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-ansi-alias`

456.hammer: `-xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`
`-ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2670 v2, 2.50 GHz)

SPECint2006 = 56.8

SPECint_base2006 = 52.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:25:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 March 2014.