



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint®2006 = 57.0

SPECint_base2006 = 53.2

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

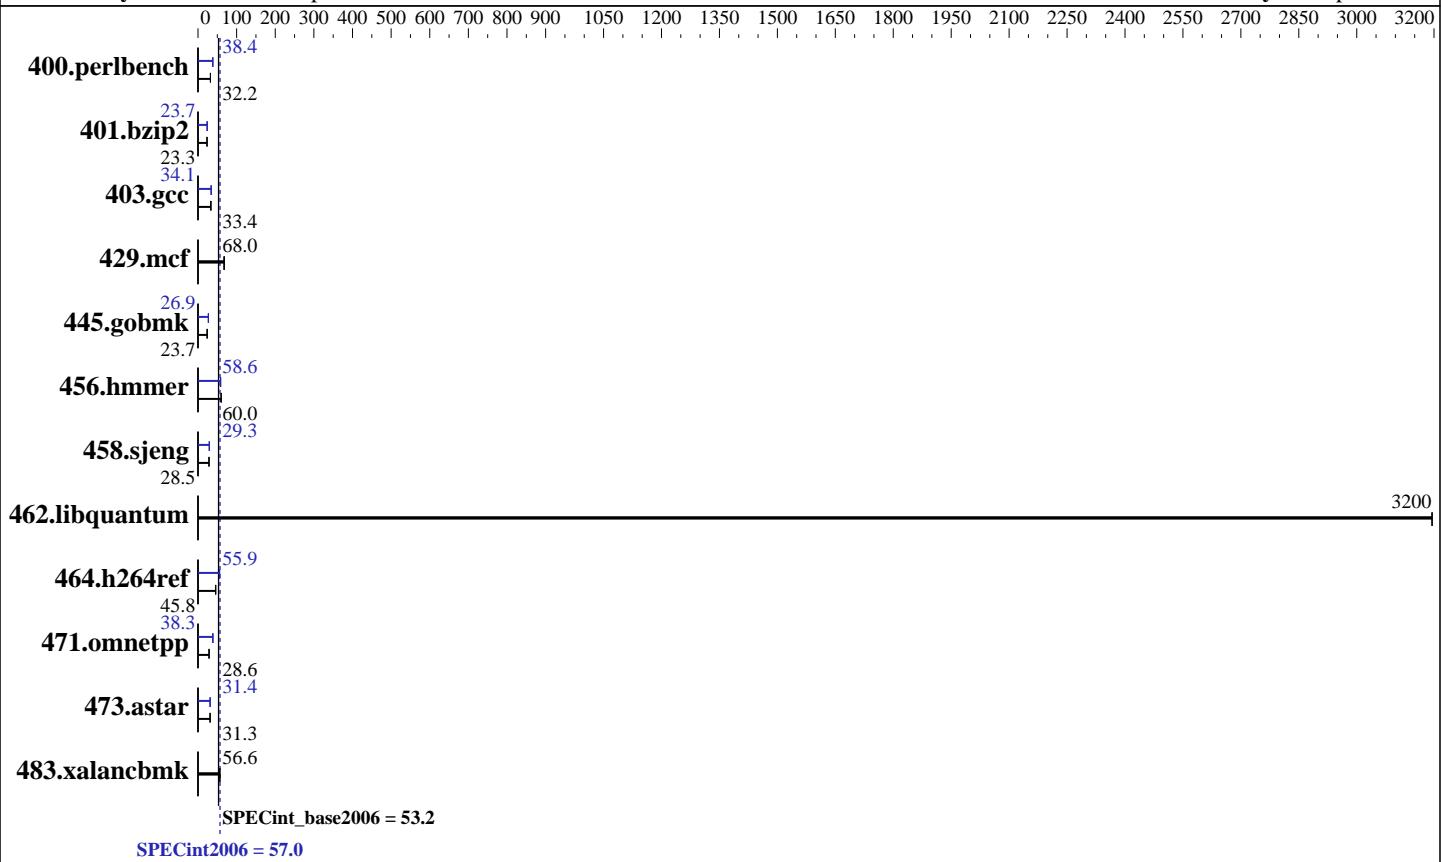

Hardware

CPU Name: Intel Xeon E5-2650 v2
CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz: 2600
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler: 2.6.32-358.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel: Yes
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint2006 = 57.0

SPECint_base2006 = 53.2

CPU2006 license: 11

Test date: Feb-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	304	32.1	303	32.2	303	32.2	255	38.3	255	38.4	255	38.4
401.bzip2	413	23.3	413	23.3	413	23.3	407	23.7	407	23.7	407	23.7
403.gcc	242	33.3	241	33.4	241	33.4	236	34.1	236	34.1	236	34.1
429.mcf	136	66.9	134	68.0	133	68.4	136	66.9	134	68.0	133	68.4
445.gobmk	442	23.7	442	23.8	442	23.7	390	26.9	391	26.9	391	26.9
456.hammer	155	60.0	156	60.0	156	59.7	159	58.6	159	58.6	159	58.6
458.sjeng	425	28.5	425	28.5	425	28.5	413	29.3	413	29.3	413	29.3
462.libquantum	6.49	3200	6.49	3200	6.49	3200	6.49	3200	6.49	3200	6.49	3200
464.h264ref	483	45.8	483	45.8	485	45.7	396	55.9	396	55.9	396	55.9
471.omnetpp	218	28.7	219	28.6	218	28.6	163	38.3	160	39.0	164	38.1
473.astar	224	31.3	224	31.3	224	31.4	223	31.4	224	31.3	224	31.4
483.xalancbmk	122	56.6	122	56.7	123	56.3	122	56.6	122	56.7	123	56.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode

Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Hyper-Threading set to Disabled

Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191
running on x3500M4 Sat Feb 15 15:31:50 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz
  2 "physical id"s (chips)
    16 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint2006 = 57.0

SPECint_base2006 = 53.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Platform Notes (Continued)

```
caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      264656404 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux x3500M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 15 15:30

SPEC is set to: /home/SPECCpu-new
Filesystem      Type    Size  Used Avail Use% Mounted on
/dev/mapper/vg_intelcrb-lv_home
                  ext4    863G   15G  804G   2% /home

Additional information from dmidecode:
BIOS IBM -[TKE133FUS-1.50]- 07/26/2013
Memory:
 8x Not Specified Not Specified
 16x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank

(End of data from sysinfo program)
"Not Specified" memory information from dmidecode indicates unused DIMM slots.
```

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPECCpu-new/libs/32:/home/SPECCpu-new/libs/64:/home/SPECCpu-new/sh"
OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint2006 = 57.0

SPECint_base2006 = 53.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

General Notes (Continued)

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint2006 = 57.0

SPECint_base2006 = 53.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
  403.gcc: -DSPEC_CPU_LP64
  429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
  458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
  473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
  -ansi-alias
```

```
401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
  -ansi-alias
```

```
403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
  -opt-malloc-options=3 -auto-ilp32
```

429.mcf: basepeak = yes

```
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
  -ansi-alias
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint2006 = 57.0

SPECint_base2006 = 53.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

456.hmmr: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
-ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint2006 = 57.0

SPECint_base2006 = 53.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:51:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 March 2014.