



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 M4
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint[®]2006 = 61.6

SPECint_base2006 = 57.0

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

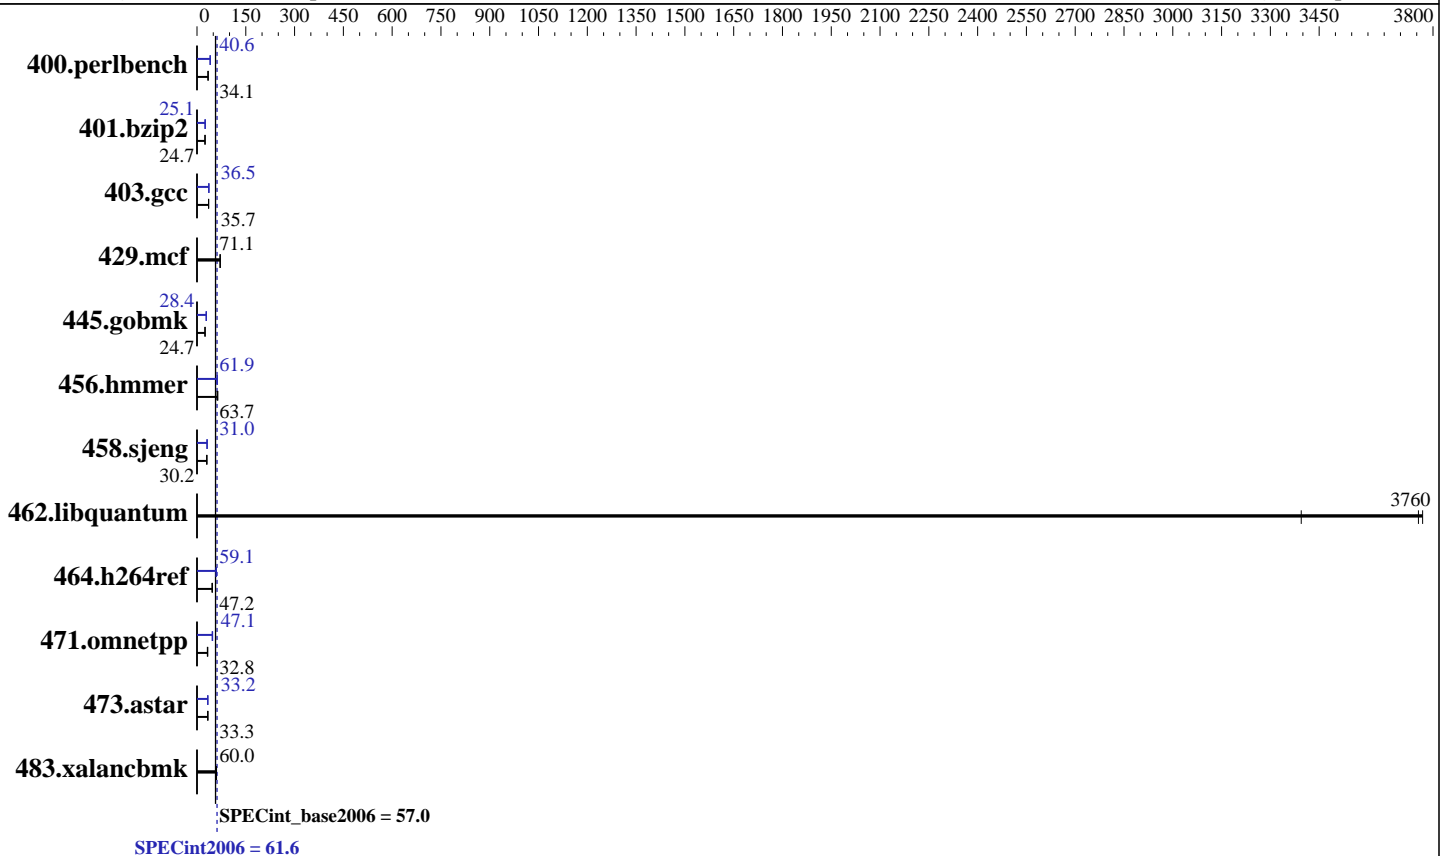

Hardware

CPU Name: Intel Xeon E5-2680 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 M4
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint2006 = **61.6**

SPECint_base2006 = **57.0**

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Feb-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	287	34.1	287	34.1	<u>287</u>	<u>34.1</u>	241	40.5	241	40.6	<u>241</u>	<u>40.6</u>
401.bzip2	<u>391</u>	<u>24.7</u>	391	24.7	390	24.7	<u>385</u>	<u>25.1</u>	385	25.1	385	25.1
403.gcc	<u>226</u>	<u>35.7</u>	226	35.6	225	35.7	221	36.4	<u>221</u>	<u>36.5</u>	221	36.5
429.mcf	<u>128</u>	<u>71.1</u>	128	71.1	127	71.6	<u>128</u>	<u>71.1</u>	128	71.1	127	71.6
445.gobmk	<u>424</u>	<u>24.7</u>	424	24.8	425	24.7	369	28.4	<u>369</u>	<u>28.4</u>	369	28.4
456.hammer	151	61.6	<u>147</u>	<u>63.7</u>	147	63.7	<u>151</u>	<u>61.9</u>	151	61.8	151	62.0
458.sjeng	401	30.2	401	30.2	<u>401</u>	<u>30.2</u>	391	31.0	390	31.0	<u>390</u>	<u>31.0</u>
462.libquantum	6.10	3390	5.50	3770	<u>5.52</u>	<u>3760</u>	6.10	3390	5.50	3770	<u>5.52</u>	<u>3760</u>
464.h264ref	467	47.3	<u>468</u>	<u>47.2</u>	481	46.1	374	59.2	374	59.1	<u>374</u>	<u>59.1</u>
471.omnetpp	196	31.8	190	32.9	<u>191</u>	<u>32.8</u>	<u>133</u>	<u>47.1</u>	133	46.9	130	48.2
473.astar	212	33.2	<u>211</u>	<u>33.3</u>	211	33.3	<u>211</u>	<u>33.2</u>	211	33.2	212	33.1
483.xalancbmk	115	59.9	115	60.1	<u>115</u>	<u>60.0</u>	115	59.9	115	60.1	<u>115</u>	<u>60.0</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Platform Notes

```
BIOS setting:
Operating Mode set to Maximum Performance
Hyper-Threading set to Disabled
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on x3550M4 Sun Feb 16 23:48:50 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2680 v2 @ 2.80GHz
2 "physical id"s (chips)
20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
Continued on next page
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 61.6

IBM System x3550 M4
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint_base2006 = 57.0

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Feb-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Platform Notes (Continued)

```
caution.)
  cpu cores : 10
  siblings  : 10
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
  cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      264465080 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3550M4 2.6.32-358.18.1.el6.x86_64 #1 SMP Fri Aug 2 17:04:38 EDT 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 15 15:11
```

```
SPEC is set to: /home/SPECcpu-new
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/mapper/vg_x3550m4-lv_home
                ext4      312G     137G   161G   46% /home
```

```
Additional information from dmidecode:
BIOS IBM -[D7E133GUS-1.50]- 08/09/2013
Memory:
8x Not Specified Not Specified
16x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)
"Not Specified" memory information from dmidecode indicates unused DIMM slots.

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"
OMP_NUM_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 61.6

IBM System x3550 M4
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint_base2006 = 57.0

CPU2006 license: 11

Test date: Feb-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

General Notes (Continued)

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/sh -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 61.6

IBM System x3550 M4
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint_base2006 = 57.0

CPU2006 license: 11

Test date: Feb-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-ansi-alias
401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
-ansi-alias
403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32
429.mcf: basepeak = yes
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 61.6

IBM System x3550 M4
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint_base2006 = 57.0

CPU2006 license: 11

Test date: Feb-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

456.hmmcr: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 M4
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint2006 = 61.6

SPECint_base2006 = 57.0

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Feb-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 21:23:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 March 2014.