



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3630 M4
(Intel Xeon E5-2440 v2, 1.90 GHz)

SPECfp[®]2006 = **70.3**

SPECfp_base2006 = **67.7**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

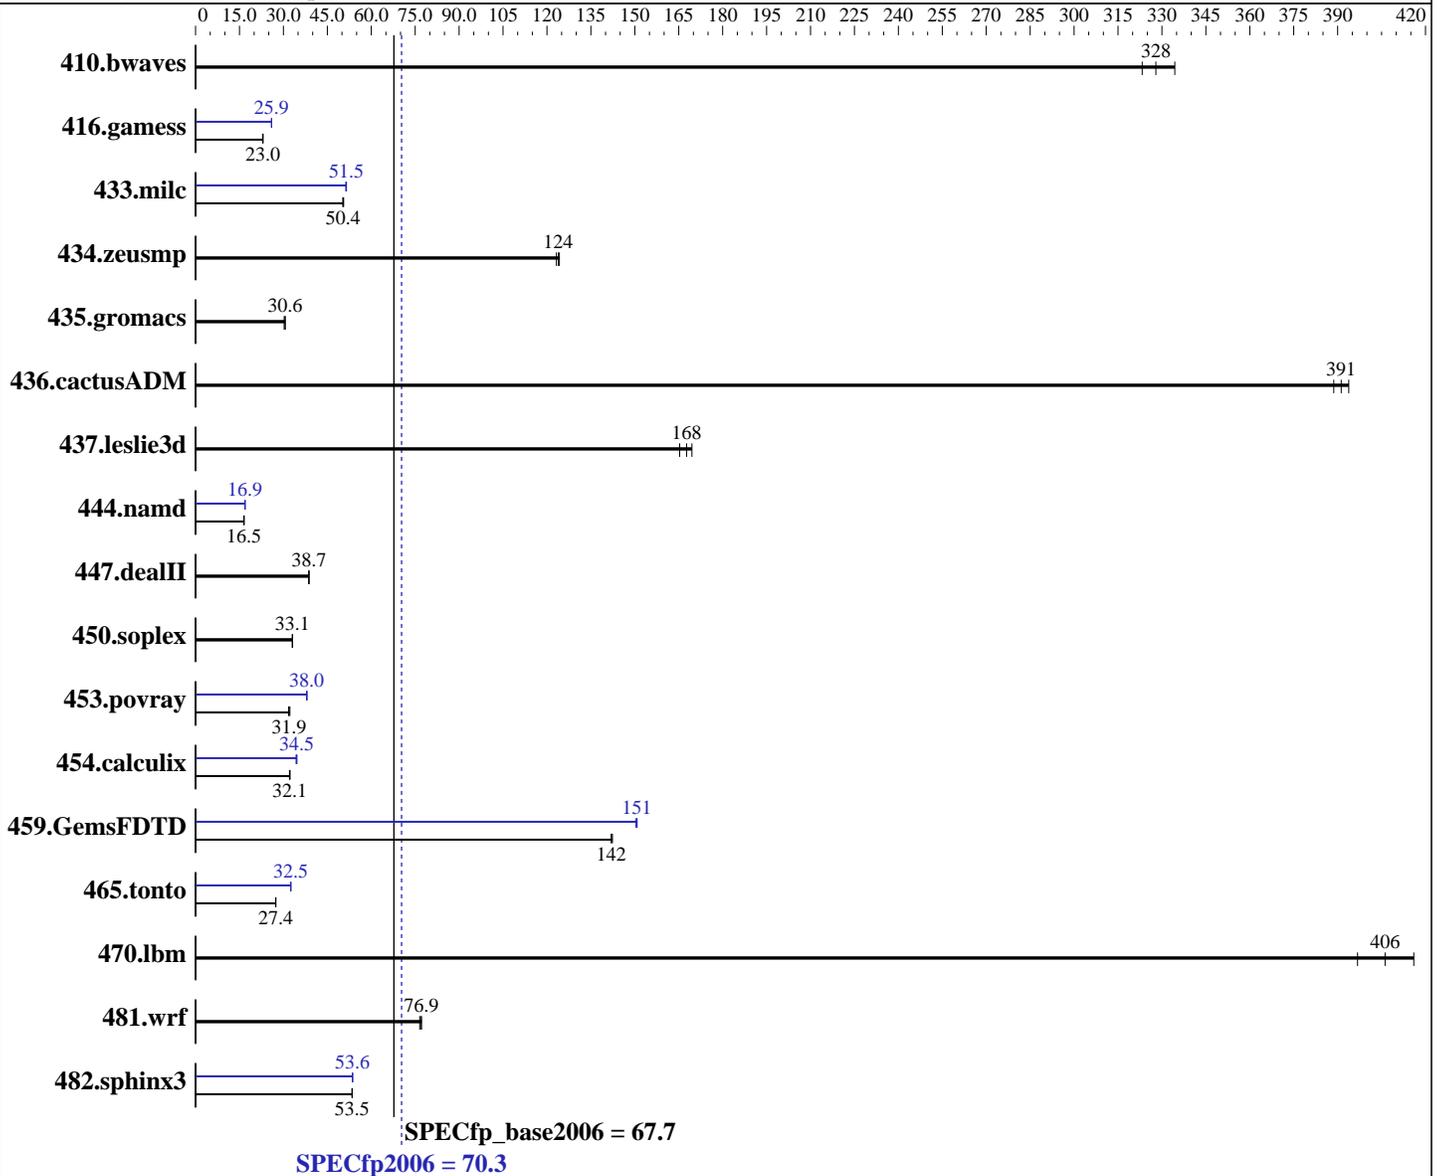

Hardware

CPU Name: Intel Xeon E5-2440 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 1900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3630 M4
(Intel Xeon E5-2440 v2, 1.90 GHz)

SPECfp2006 = **70.3**

SPECfp_base2006 = **67.7**

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 192 GB (12 x 16 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 2 TB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	41.4	328	40.6	334	42.0	323	41.4	328	40.6	334	42.0	323
416.gamess	853	23.0	854	22.9	849	23.1	754	26.0	755	25.9	755	25.9
433.milc	182	50.6	182	50.4	183	50.3	178	51.5	178	51.5	179	51.3
434.zeusmp	73.2	124	73.9	123	73.5	124	73.2	124	73.9	123	73.5	124
435.gromacs	233	30.6	236	30.3	233	30.6	233	30.6	236	30.3	233	30.6
436.cactusADM	30.3	394	30.7	389	30.5	391	30.3	394	30.7	389	30.5	391
437.leslie3d	55.5	170	56.1	168	56.9	165	55.5	170	56.1	168	56.9	165
444.namd	484	16.6	485	16.5	486	16.5	475	16.9	475	16.9	474	16.9
447.dealII	295	38.7	296	38.7	296	38.7	295	38.7	296	38.7	296	38.7
450.soplex	252	33.0	252	33.1	252	33.1	252	33.0	252	33.1	252	33.1
453.povray	165	32.2	167	31.8	167	31.9	140	37.9	140	38.0	140	38.1
454.calculix	257	32.1	257	32.1	256	32.3	239	34.5	240	34.3	238	34.6
459.GemsFDTD	74.7	142	74.5	142	74.7	142	70.4	151	70.6	150	70.4	151
465.tonto	359	27.4	359	27.4	360	27.4	302	32.5	303	32.5	303	32.5
470.lbm	33.8	406	33.0	416	34.6	397	33.8	406	33.0	416	34.6	397
481.wrf	145	77.2	146	76.5	145	76.9	145	77.2	146	76.5	145	76.9
482.sphinx3	364	53.5	364	53.5	365	53.5	364	53.6	364	53.6	363	53.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode

Platform Notes

BIOS setting:
Operating Mode set to Maximum Performance



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 70.3

IBM System x3630 M4
(Intel Xeon E5-2440 v2, 1.90 GHz)

SPECfp_base2006 = 67.7

CPU2006 license: 11

Test date: Mar-2014

Test sponsor: IBM Corporation

Hardware Availability: Mar-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3630 M4
(Intel Xeon E5-2440 v2, 1.90 GHz)

SPECfp2006 = 70.3

SPECfp_base2006 = 67.7

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3630 M4
(Intel Xeon E5-2440 v2, 1.90 GHz)

SPECfp2006 = 70.3

SPECfp_base2006 = 67.7

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3630 M4
(Intel Xeon E5-2440 v2, 1.90 GHz)

SPECfp2006 = 70.3

SPECfp_base2006 = 67.7

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:57:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 April 2014.