



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R820 (Intel Xeon E5-4650 v2, 2.40 GHz)

SPECint®2006 = 50.2

SPECint_base2006 = 46.7

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

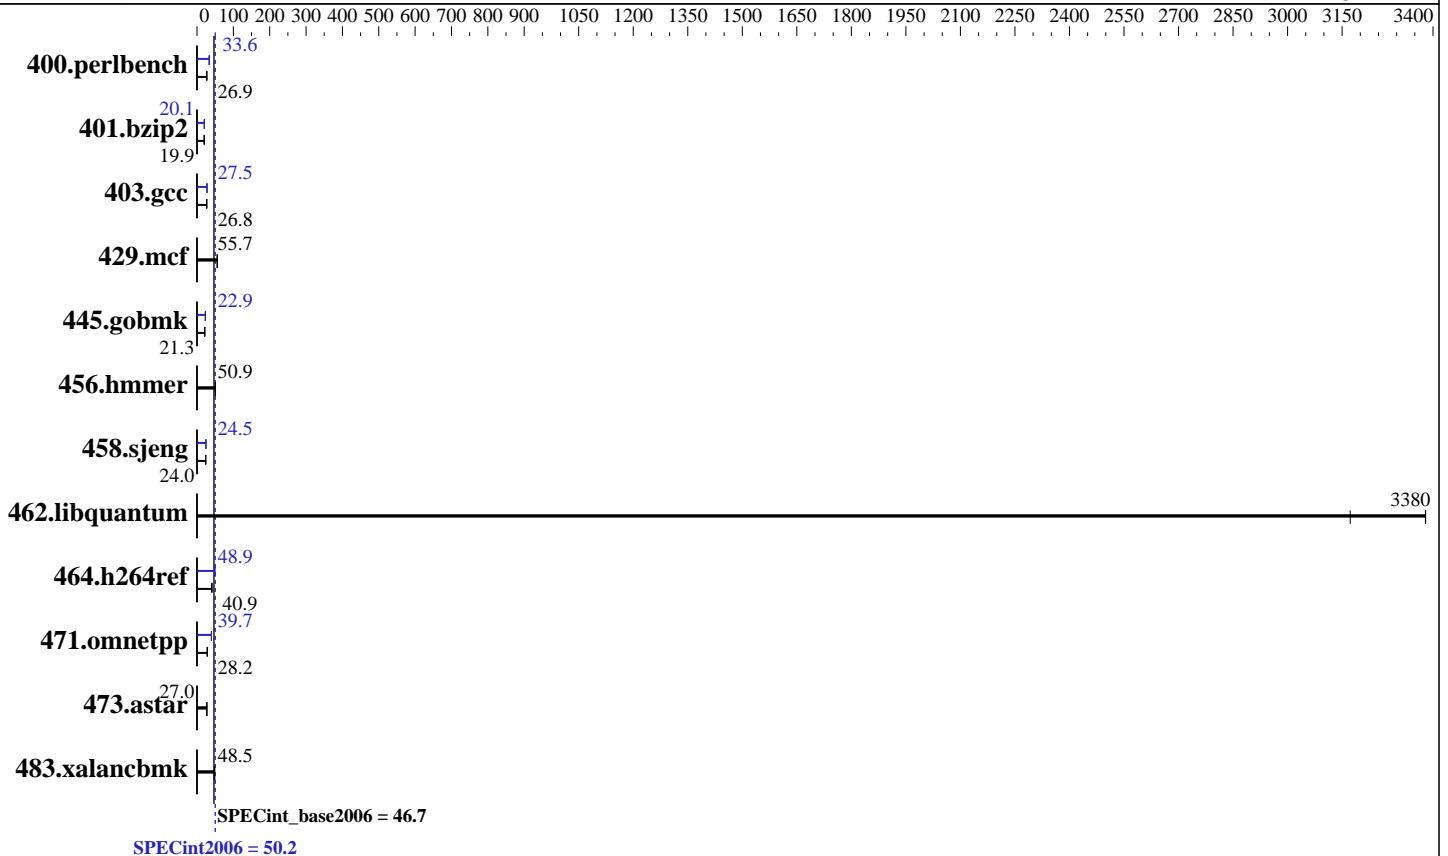

Hardware

CPU Name: Intel Xeon E5-4650 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip
 CPU(s) orderable: 4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 1TB 7200 RPM Near-Line SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 SUSE Linux Enterprise Server 11 (x86_64)
 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 50.2

PowerEdge R820 (Intel Xeon E5-4650 v2, 2.40 GHz)

SPECint_base2006 = 46.7

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Feb-2014
Hardware Availability: Mar-2014
Software Availability: Aug-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	363	26.9	363	26.9	363	26.9	290	33.6	290	33.6	291	33.6
401.bzip2	486	19.9	485	19.9	485	19.9	480	20.1	480	20.1	480	20.1
403.gcc	302	26.7	301	26.8	301	26.8	293	27.5	292	27.5	292	27.5
429.mcf	164	55.7	164	55.7	164	55.6	164	55.7	164	55.7	164	55.6
445.gobmk	491	21.3	492	21.3	493	21.3	457	22.9	457	23.0	457	22.9
456.hammer	183	50.9	183	50.9	186	50.1	183	50.9	183	50.9	186	50.1
458.sjeng	505	24.0	505	24.0	505	24.0	493	24.5	493	24.5	493	24.5
462.libquantum	6.13	3380	6.53	3170	6.13	3380	6.13	3380	6.53	3170	6.13	3380
464.h264ref	541	40.9	542	40.8	539	41.0	452	49.0	452	48.9	452	48.9
471.omnetpp	221	28.3	222	28.1	221	28.2	157	39.9	158	39.5	158	39.7
473.astar	260	27.0	260	27.0	260	27.0	260	27.0	260	27.0	260	27.0
483.xalancbmk	145	47.4	142	48.5	141	48.8	145	47.4	142	48.5	141	48.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```

Virtualization Technology disabled
Execute Disable disabled
Logical Processor enabled
System Profile set to Custom
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost enabled
C1E enabled
C States enabled
Monitor/Mwait enabled
Memory Patrol Scrub set to disabled
Memory Refresh Rate set to 1x
Memory Operating Voltage set to Auto
Collaborative CPU Performance Control disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux Fri Feb 21 02:30:59 2014

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 50.2

PowerEdge R820 (Intel Xeon E5-4650 v2, 2.40 GHz)

SPECint_base2006 = 46.7

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) CPU E5-4650 v2 @ 2.40GHz
 4 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 10
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
  physical 2: cores 0 1 2 3 4 8 9 10 11 12
  physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB

```

```

From /proc/meminfo
MemTotal:      529392220 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3

```

```

uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 21 02:29 last=S

```

SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext2  909G  7.8G  900G   1% /

```

```

Additional information from dmidecode:
BIOS Dell Inc. 2.0.24 01/21/2014
Memory:
8x 002C04B3002C 36JSF2G72PZ-1G9E1 16 GB 1866 MHz
21x 00CE00B300CE M393B2G70DB0-CMA 16 GB 1866 MHz
3x 00CE04B300CE M393B2G70DB0-CMA 16 GB 1866 MHz

```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 50.2

PowerEdge R820 (Intel Xeon E5-4650 v2,
2.40 GHz)

SPECint_base2006 = 46.7

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
OMP_NUM_THREADS = "40"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32

-Wl,-z,muldefs -L/sh -lsmartheap64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R820 (Intel Xeon E5-4650 v2,
2.40 GHz)

SPECint2006 = 50.2

SPECint_base2006 = 46.7

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 50.2

PowerEdge R820 (Intel Xeon E5-4650 v2, 2.40 GHz)

SPECint_base2006 = 46.7

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

Peak Optimization Flags (Continued)

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R820 (Intel Xeon E5-4650 v2,
2.40 GHz)

SPECint2006 = 50.2

SPECint_base2006 = 46.7

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:37:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 April 2014.