



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS520H (Intel Xeon E5-2690 v2)

SPECfp®_rate2006 = 630

SPECfp_rate_base2006 = 615

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

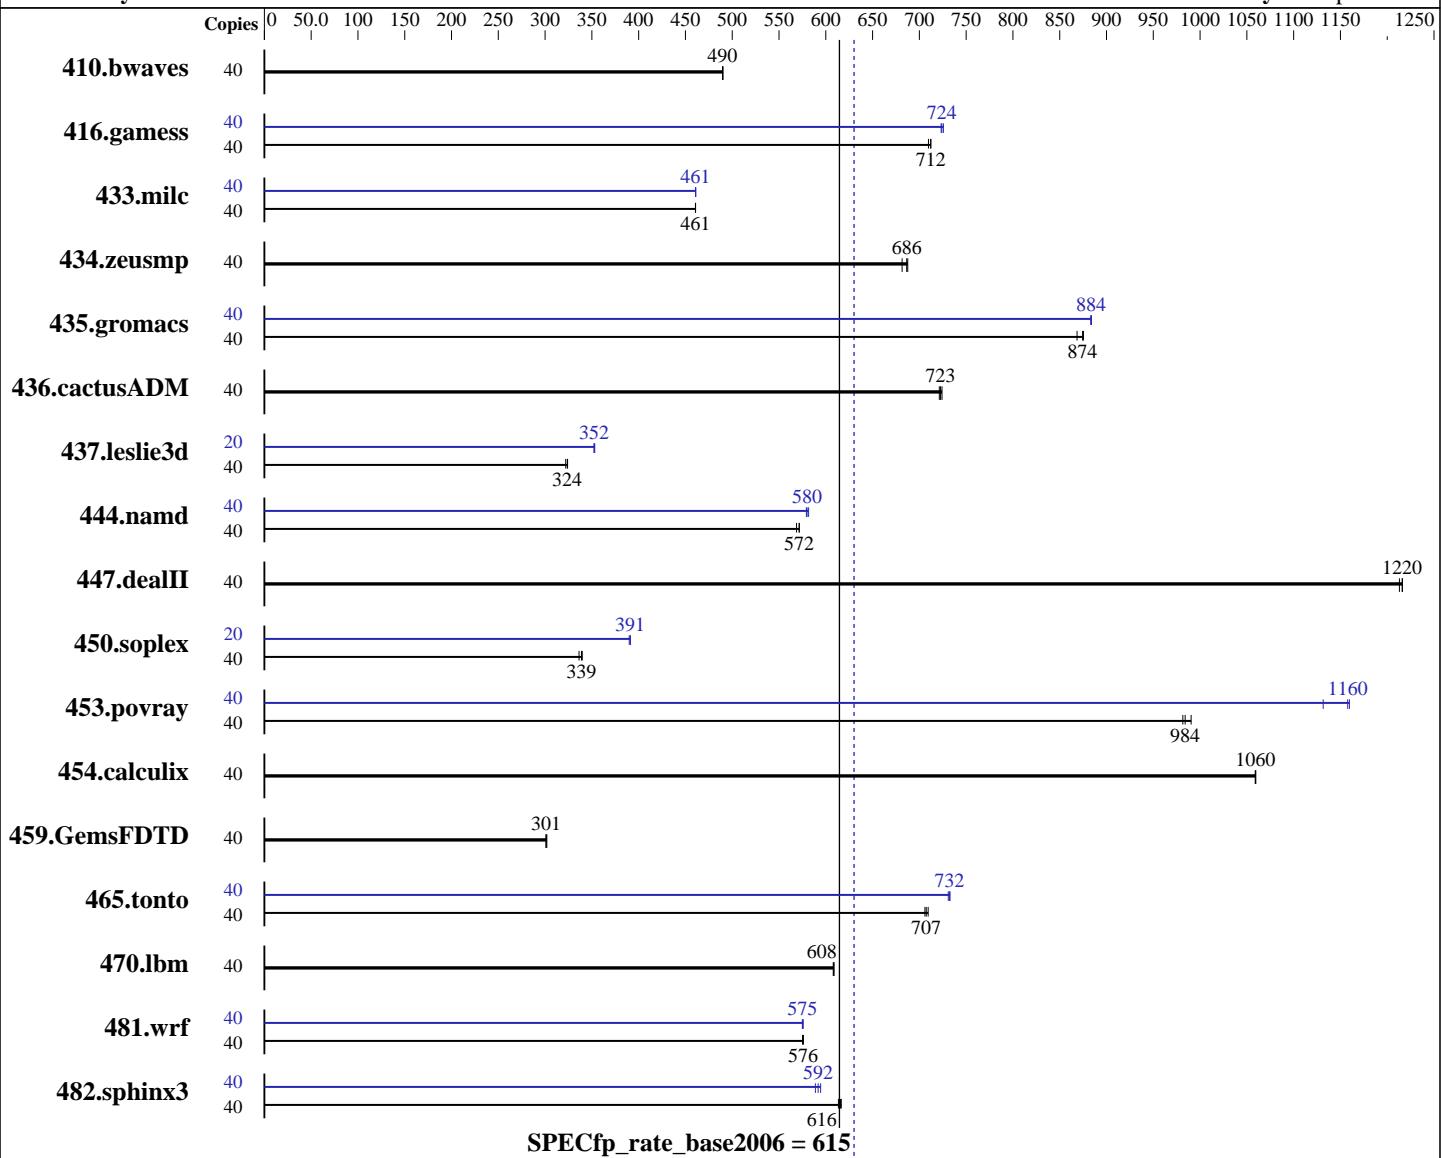

SPECfp_rate_base2006 = 615

SPECfp_rate2006 = 630

Hardware

CPU Name: Intel Xeon E5-2690 v2
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz: 3000
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 1, 2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler: 2.6.32-358.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS520H (Intel Xeon E5-2690 v2)

SPECfp_rate2006 = 630

SPECfp_rate_base2006 = 615

CPU2006 license: 35

Test date: Mar-2014

Test sponsor: HITACHI

Hardware Availability: Feb-2014

Tested by: HITACHI

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: none

Disk Subsystem: 1 x 146 GB SAS, 15000 RPM
 Other Hardware: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1110	490	1109	490	<u>1110</u>	<u>490</u>	40	1110	490	1109	490	<u>1110</u>	<u>490</u>		
416.gamess	40	<u>1100</u>	<u>712</u>	1100	712	1104	710	40	1079	726	<u>1082</u>	<u>724</u>	1083	723		
433.milc	40	797	461	<u>797</u>	<u>461</u>	797	461	40	796	461	797	461	<u>797</u>	<u>461</u>		
434.zeusmp	40	<u>530</u>	<u>686</u>	529	688	534	682	40	<u>530</u>	<u>686</u>	529	688	534	682		
435.gromacs	40	<u>327</u>	<u>874</u>	329	869	326	875	40	323	883	323	884	<u>323</u>	<u>884</u>		
436.cactusADM	40	660	724	<u>661</u>	<u>723</u>	663	721	40	660	724	<u>661</u>	<u>723</u>	663	721		
437.leslie3d	40	1168	322	1160	324	<u>1161</u>	<u>324</u>	20	<u>533</u>	<u>352</u>	532	353	534	352		
444.namd	40	564	569	561	572	<u>561</u>	<u>572</u>	40	<u>553</u>	<u>580</u>	552	582	554	579		
447.dealII	40	377	1210	376	1220	<u>376</u>	<u>1220</u>	40	377	1210	376	1220	<u>376</u>	<u>1220</u>		
450.soplex	40	992	336	<u>984</u>	<u>339</u>	982	340	20	428	390	426	391	<u>427</u>	<u>391</u>		
453.povray	40	<u>216</u>	<u>984</u>	215	990	217	982	40	184	1160	188	1130	<u>184</u>	<u>1160</u>		
454.calculix	40	312	1060	311	1060	<u>311</u>	<u>1060</u>	40	312	1060	311	1060	<u>311</u>	<u>1060</u>		
459.GemsFDTD	40	<u>1409</u>	<u>301</u>	1410	301	1406	302	40	<u>1409</u>	<u>301</u>	1410	301	1406	302		
465.tonto	40	558	706	<u>556</u>	<u>707</u>	555	709	40	<u>538</u>	<u>732</u>	539	731	537	733		
470.lbm	40	904	608	903	609	<u>903</u>	<u>608</u>	40	904	608	903	609	<u>903</u>	<u>608</u>		
481.wrf	40	777	575	<u>776</u>	<u>576</u>	776	576	40	<u>776</u>	<u>576</u>	<u>777</u>	<u>575</u>	777	575		
482.sphinx3	40	1271	613	1264	617	<u>1266</u>	<u>616</u>	40	<u>1317</u>	<u>592</u>	1324	589	1311	595		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS520H (Intel Xeon E5-2690 v2)

SPECfp_rate2006 = 630

SPECfp_rate_base2006 = 615

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

Platform Notes

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$
running on localhost.localdomain Tue Mar 11 19:25:20 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2690 v2 @ 3.00GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings : 20
    physical 0: cores 0 1 2 3 4 8 9 10 11 12
    physical 1: cores 0 1 2 3 4 8 9 10 11 12
    cache size : 25600 KB
```

```
From /proc/meminfo
    MemTotal:       132334256 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 11 19:09
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
                ext4   133G   16G  110G  13%  /
```

Additional information from dmidecode:

```
BIOS HITACHI EP1043 02/04/2014
Memory:
 16x Not Specified Not Specified
 8x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS520H (Intel Xeon E5-2690 v2)

SPECfp_rate2006 = 630

SPECfp_rate_base2006 = 615

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

BladeSymphony BS520H and Hitachi Compute Blade 520H are electronically equivalent.

The results have been measured on a BladeSymphony BS520H

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS520H (Intel Xeon E5-2690 v2)

SPECfp_rate2006 = 630

SPECfp_rate_base2006 = 615

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3:

```
icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex:

```
icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

410.bwaves:

```
-DSPEC_CPU_LP64
```


416.gamess:

```
-DSPEC_CPU_LP64
```


433.milc:

```
-DSPEC_CPU_LP64
```


434.zeusmp:

```
-DSPEC_CPU_LP64
```


435.gromacs:

```
-DSPEC_CPU_LP64 -nofor_main
```


436.cactusADM:

```
-DSPEC_CPU_LP64 -nofor_main
```


437.leslie3d:

```
-DSPEC_CPU_LP64
```


444.namd:

```
-DSPEC_CPU_LP64
```


447.dealII:

```
-DSPEC_CPU_LP64
```


453.povray:

```
-DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS520H (Intel Xeon E5-2690 v2)

SPECfp_rate2006 = 630

SPECfp_rate_base2006 = 615

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS520H (Intel Xeon E5-2690 v2)

SPECfp_rate2006 = 630

SPECfp_rate_base2006 = 615

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

```
465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
           -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
              -prof-use(pass 2) -opt-prefetch -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

```
481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>
<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>
<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 22:28:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 June 2014.