



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®2006 = 39.7

Huawei BH622 V2 (Intel Xeon E5-2603)

SPECfp_base2006 = 38.0

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2014

Hardware Availability: Jan-2012

Software Availability: Nov-2013

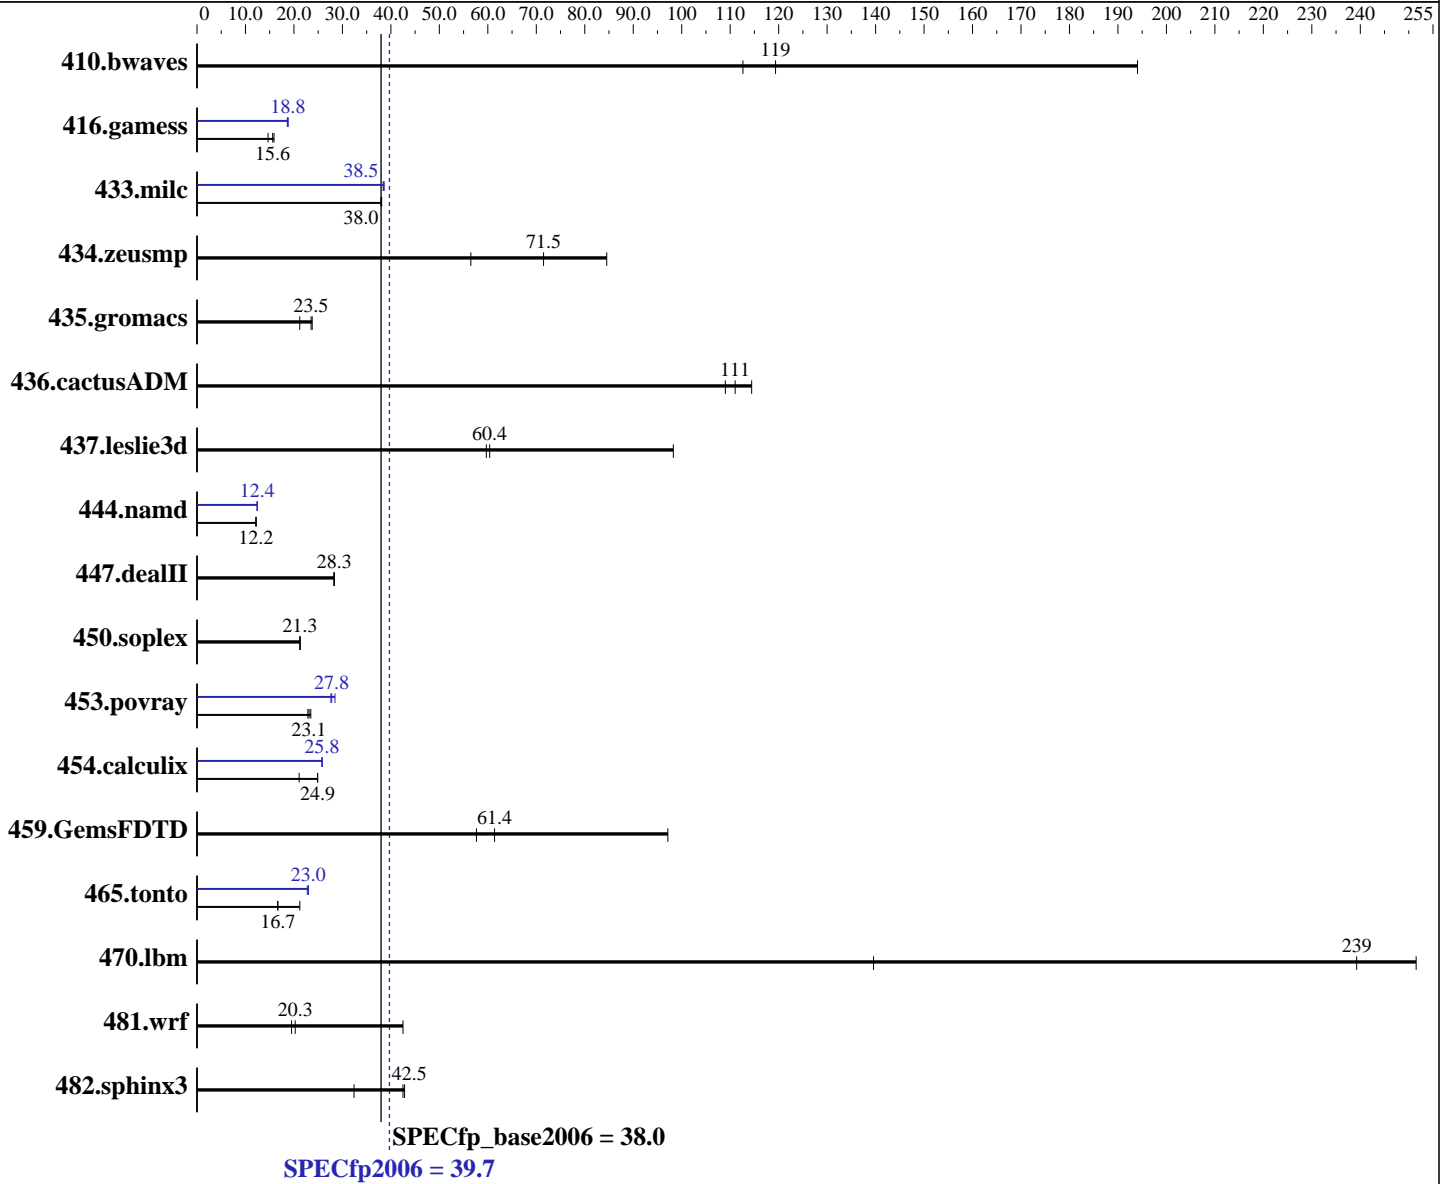

Hardware

CPU Name: Intel Xeon E5-2603
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 39.7

Huawei BH622 V2 (Intel Xeon E5-2603)

SPECfp_base2006 = 38.0

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2014

Hardware Availability: Jan-2012

Software Availability: Nov-2013

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-09, ECC)
 Disk Subsystem: 1 X 300 GB SAS 7200RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	121	113	114	119	70.0	194	121	113	114	119	70.0	194
416.gamess	1254	15.6	1232	15.9	1335	14.7	1044	18.8	1042	18.8	1051	18.6
433.milc	242	38.0	242	38.0	241	38.1	239	38.4	238	38.6	238	38.5
434.zeusmp	161	56.5	108	84.5	127	71.5	161	56.5	108	84.5	127	71.5
435.gromacs	303	23.5	300	23.8	337	21.2	303	23.5	300	23.8	337	21.2
436.cactusADM	110	109	104	114	108	111	110	109	104	114	108	111
437.leslie3d	156	60.4	157	59.7	95.7	98.3	156	60.4	157	59.7	95.7	98.3
444.namd	658	12.2	659	12.2	658	12.2	646	12.4	646	12.4	646	12.4
447.dealII	404	28.3	405	28.3	404	28.3	404	28.3	405	28.3	404	28.3
450.soplex	393	21.2	392	21.3	392	21.3	393	21.2	392	21.3	392	21.3
453.povray	227	23.5	230	23.1	233	22.9	187	28.5	191	27.8	193	27.6
454.calculix	392	21.1	331	24.9	332	24.9	320	25.8	319	25.8	319	25.8
459.GemsFDTD	109	97.1	184	57.7	173	61.4	109	97.1	184	57.7	173	61.4
465.tonto	464	21.2	592	16.6	589	16.7	432	22.8	428	23.0	428	23.0
470.lbm	57.4	239	54.6	252	98.4	140	57.4	239	54.6	252	98.4	140
481.wrf	551	20.3	263	42.5	572	19.5	551	20.3	263	42.5	572	19.5
482.sphinx3	459	42.5	455	42.8	602	32.4	459	42.5	455	42.8	602	32.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Set Power Efficiency Mode to Performance
 Sysinfo program /spec/config/sysinfo.rev6818
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
 running on huawei Mon Apr 14 23:03:30 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 39.7

Huawei BH622 V2 (Intel Xeon E5-2603)

SPECfp_base2006 = 38.0

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2014

Hardware Availability: Jan-2012

Software Availability: Nov-2013

Platform Notes (Continued)

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz

2 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

physical 1: cores 0 1 2 3

cache size : 10240 KB

From /proc/meminfo

MemTotal: 132103760 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:

Linux huawei 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 11 08:44

SPEC is set to: /spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext4	193G	75G	109G	41%	/

Additional information from dmidecode:

BIOS Insyde Corp. RMIBV372 12/21/2013

Memory:

8x NO DIMM NO DIMM

11x Samsung M393B1K70CH0-CH9 8 GB 1066 MHz 2 rank

5x Samsung M393B1K70DH0-CH9 8 GB 1066 MHz 2 rank

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

OMP_NUM_THREADS = "8"

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 39.7

Huawei BH622 V2 (Intel Xeon E5-2603)

SPECfp_base2006 = 38.0

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2014

Hardware Availability: Jan-2012

Software Availability: Nov-2013

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	39.7
Huawei BH622 V2 (Intel Xeon E5-2603)	SPECfp_base2006 =	38.0

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Apr-2014
Hardware Availability: Jan-2012
Software Availability: Nov-2013

Base Optimization Flags (Continued)

C++ benchmarks:
 -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
 -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
 -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Fortran benchmarks:
 ifort -m64

Benchmarks using both Fortran and C:
 icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 39.7

Huawei BH622 V2 (Intel Xeon E5-2603)

SPECfp_base2006 = 38.0

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2014

Hardware Availability: Jan-2012

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 39.7

Huawei BH622 V2 (Intel Xeon E5-2603)

SPECfp_base2006 = 38.0

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2014

Hardware Availability: Jan-2012

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 3 18:03:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 May 2014.