



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®2006 = 87.4

Huawei CH222 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 82.1

CPU2006 license: 3175


Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

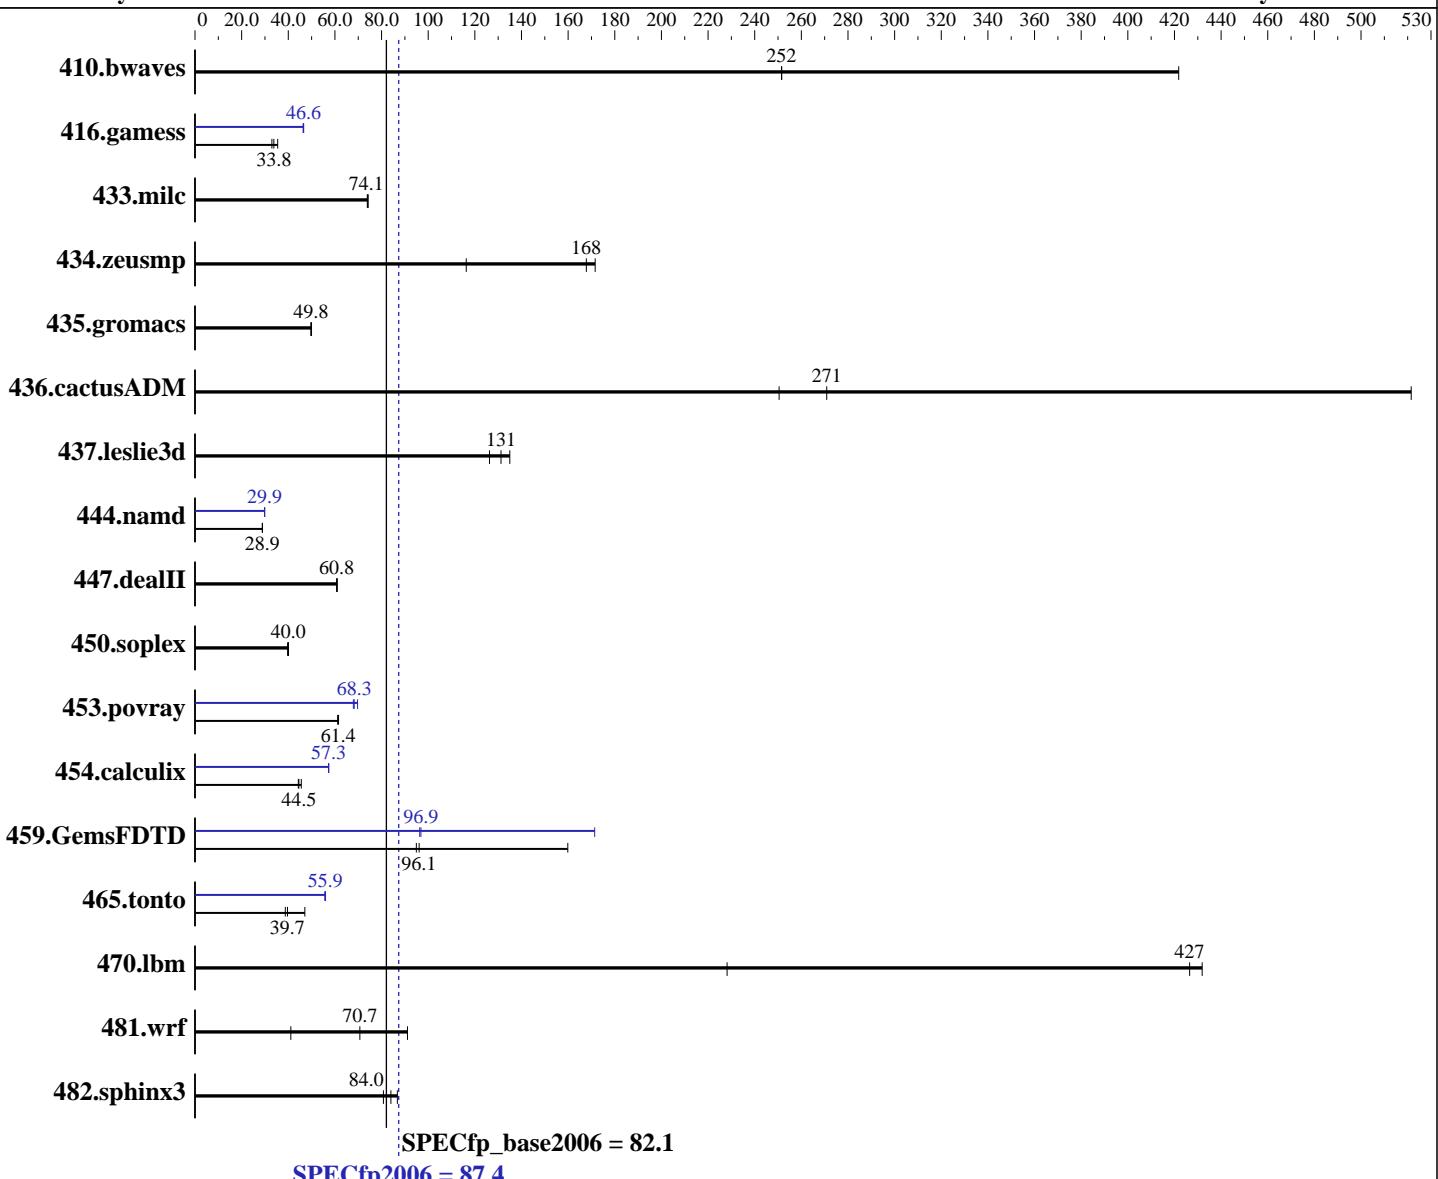

Hardware

CPU Name: Intel Xeon E5-2637 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 3500
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
Compiler: 2.6.32-431.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 87.4

Huawei CH222 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 82.1

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 256 GB SATA, SSD
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32.2	422	54.0	252	54.0	252	32.2	422	54.0	252	54.0	252
416.gamess	594	33.0	579	33.8	552	35.5	422	46.4	421	46.6	420	46.6
433.milc	124	74.1	124	74.2	124	73.9	124	74.1	124	74.2	124	73.9
434.zeusmp	53.0	172	78.2	116	54.2	168	53.0	172	78.2	116	54.2	168
435.gromacs	144	49.8	143	50.0	144	49.8	144	49.8	143	50.0	144	49.8
436.cactusADM	47.7	250	22.9	522	44.1	271	47.7	250	22.9	522	44.1	271
437.leslie3d	74.4	126	71.6	131	69.6	135	74.4	126	71.6	131	69.6	135
444.namd	278	28.9	277	28.9	277	28.9	269	29.9	269	29.9	269	29.8
447.dealII	188	61.0	188	60.8	188	60.8	188	61.0	188	60.8	188	60.8
450.soplex	210	39.7	208	40.1	208	40.0	210	39.7	208	40.1	208	40.0
453.povray	86.4	61.5	86.7	61.4	87.0	61.2	78.3	67.9	77.9	68.3	76.3	69.7
454.calculix	185	44.5	186	44.3	181	45.6	144	57.3	144	57.3	144	57.3
459.GemsFDTD	66.4	160	110	96.1	112	94.9	110	96.4	110	96.9	61.9	171
465.tonto	254	38.7	248	39.7	209	47.1	176	55.9	176	56.0	177	55.7
470.lbm	60.2	228	31.8	432	32.2	427	60.2	228	31.8	432	32.2	427
481.wrf	158	70.7	123	91.1	272	41.1	158	70.7	123	91.1	272	41.1
482.sphinx3	232	84.0	225	86.8	241	80.8	232	84.0	225	86.8	241	80.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Set Snoop Mode to HS

Set Hyper-Threading to Disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$Date::: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on xjt Thu Sep 11 08:33:52 2014

This section contains SUT (System Under Test) info as seen by

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 87.4

Huawei CH222 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 82.1

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2637 v3 @ 3.50GHz
        2 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings   : 4
    physical 0: cores 0 1 4 5
    physical 1: cores 0 1 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
    MemTotal:      264278296 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
    Linux xjt 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
    x86_64 GNU/Linux
```

```
run-level 3 Sep 11 08:32
```

```
SPEC is set to: /spec
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sdal      ext4  222G   72G  139G  34% /
```

Additional information from dmidecode:

BIOS Insyde Corp. 1.17 09/03/2014

Memory:

```
8x NO DIMM NO DIMM      3 rank
8x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 1 rank
8x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 87.4

Huawei CH222 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 82.1

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

OMP_NUM_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Huawei CH121 V3 and Huawei CH222 V3

are electronically equivalent.

The results have been measured on a Huawei CH121 V3 model

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 87.4

Huawei CH222 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 82.1

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 87.4

Huawei CH222 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 82.1

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 87.4

Huawei CH222 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 82.1

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 22 12:20:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 October 2014.