



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

SPECfp®_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019


Test date: Oct-2014

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

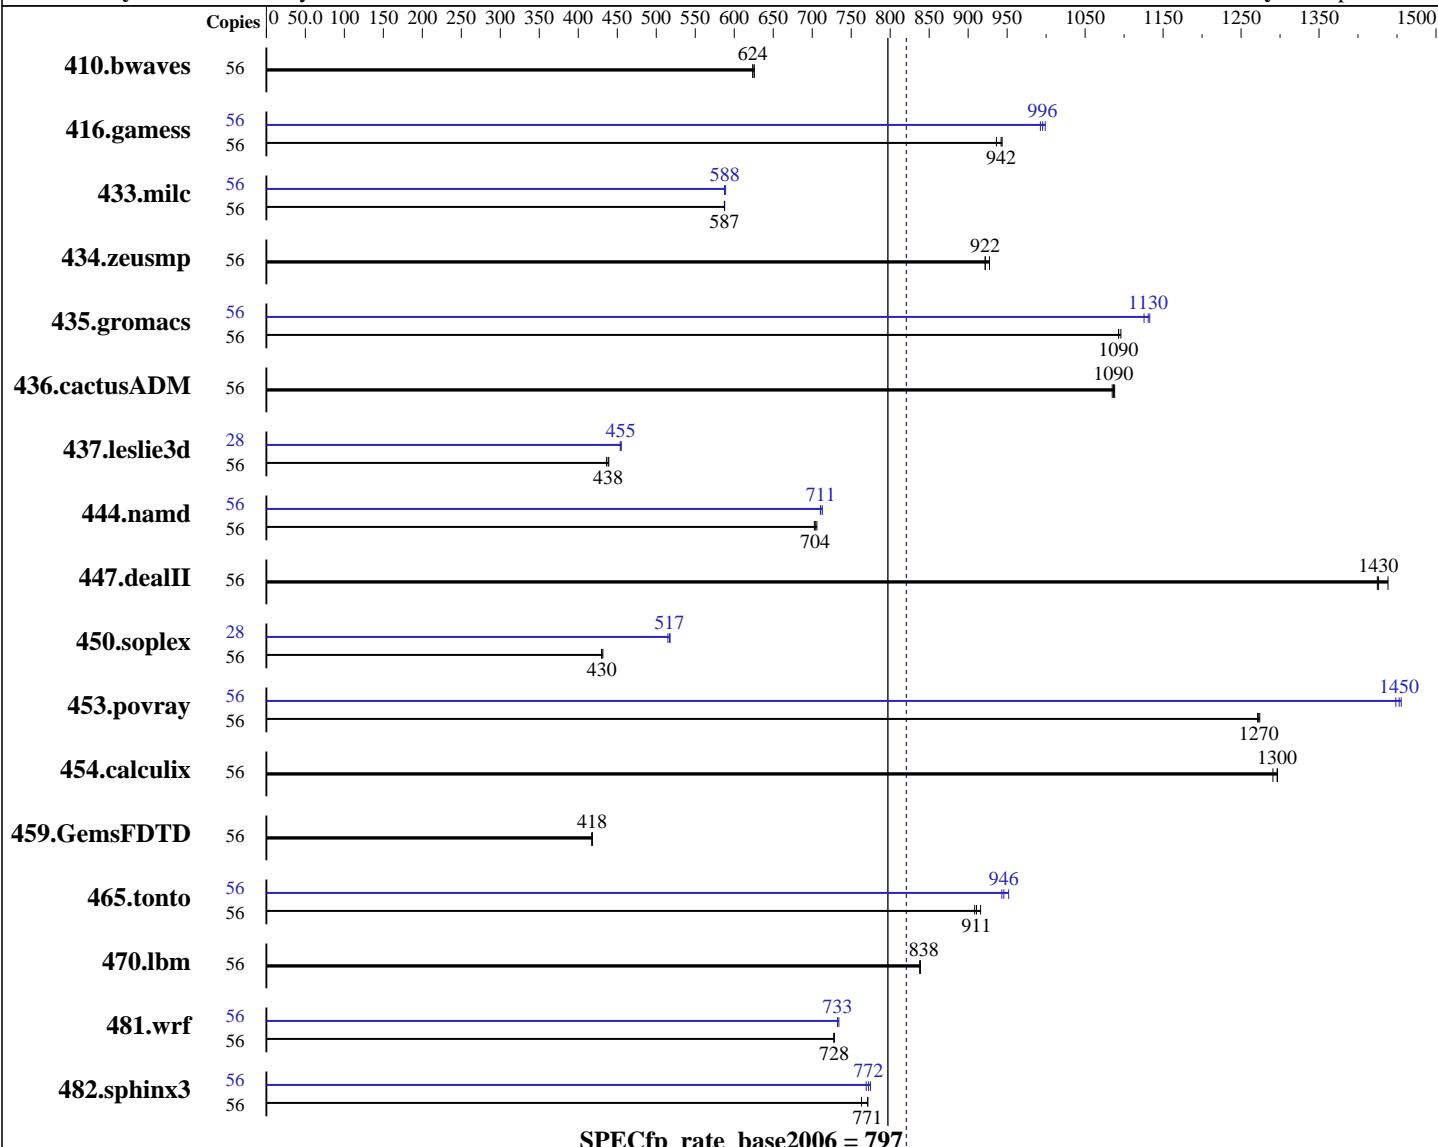

Hardware

CPU Name: Intel Xeon E5-2683 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
Compiler: 3.10.0-123.el7.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test date: Oct-2014

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

L3 Cache: 35 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 400GB SAS, SSD 6GB/s
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	<u>1220</u>	<u>624</u>	1216	626	1220	624	56	<u>1220</u>	<u>624</u>	1216	626	1220	624
416.gamess	56	1171	936	<u>1164</u>	<u>942</u>	1162	944	56	<u>1101</u>	<u>996</u>	1105	993	1098	999
433.milc	56	875	588	<u>875</u>	<u>587</u>	875	587	56	<u>875</u>	<u>588</u>	<u>875</u>	<u>588</u>	873	589
434.zeusmp	56	553	922	<u>553</u>	<u>922</u>	549	927	56	<u>553</u>	<u>922</u>	<u>553</u>	<u>922</u>	549	927
435.gromacs	56	366	1090	365	1100	<u>366</u>	<u>1090</u>	56	<u>354</u>	<u>1130</u>	353	1130	355	1130
436.cactusADM	56	615	1090	617	1080	<u>616</u>	<u>1090</u>	56	615	1090	617	1080	<u>616</u>	<u>1090</u>
437.leslie3d	56	<u>1201</u>	<u>438</u>	1199	439	1207	436	28	<u>580</u>	<u>454</u>	578	455	<u>579</u>	<u>455</u>
444.namd	56	636	706	639	703	<u>638</u>	<u>704</u>	56	632	710	<u>632</u>	<u>711</u>	630	713
447.dealII	56	<u>449</u>	<u>1430</u>	450	1420	445	1440	56	<u>449</u>	<u>1430</u>	450	1420	445	1440
450.soplex	56	1082	432	1087	430	<u>1086</u>	<u>430</u>	28	<u>451</u>	<u>518</u>	<u>452</u>	<u>517</u>	453	515
453.povray	56	234	1270	234	1270	<u>234</u>	<u>1270</u>	56	206	1450	205	1460	<u>205</u>	<u>1450</u>
454.calculix	56	358	1290	356	1300	<u>356</u>	<u>1300</u>	56	358	1290	356	1300	<u>356</u>	<u>1300</u>
459.GemsFDTD	56	1421	418	<u>1422</u>	<u>418</u>	1424	417	56	1421	418	<u>1422</u>	<u>418</u>	1424	417
465.tonto	56	<u>605</u>	<u>911</u>	602	916	607	908	56	584	943	579	952	<u>583</u>	<u>946</u>
470.lbm	56	917	839	<u>918</u>	<u>838</u>	918	838	56	917	839	<u>918</u>	<u>838</u>	918	838
481.wrf	56	859	728	860	728	<u>859</u>	<u>728</u>	56	854	733	852	734	<u>854</u>	<u>733</u>
482.sphinx3	56	1415	771	<u>1416</u>	<u>771</u>	1430	763	56	<u>1409</u>	<u>775</u>	<u>1413</u>	<u>772</u>	1419	769

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

CPU performance set to HPC
 Power Technology set to Custom
 Processor Power State C6 set to Disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test date: Oct-2014

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Platform Notes (Continued)

Energy Performance BIAS setting set to Performance
Memory RAS configuration set to Maximum Performance
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191
running on rhel7 Thu Oct 23 20:47:53 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2683 v3 @ 2.00GHz
        2 "physical id"s (chips)
        56 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 7
        siblings : 14
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    cache size : 17920 KB
```

```
From /proc/meminfo
    MemTotal:      263701984 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
    Linux rhel7 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64
    x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 23 08:22

SPEC is set to: /opt/cpu2006-1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdb1 ext4 345G 85G 243G 26% /

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test date: Oct-2014

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Platform Notes (Continued)

Additional information from dmidecode:

BIOS Cisco Systems, Inc. C240M4.2.0.3.0.080720142205 08/07/2014

Memory:

16x 0xCE00 M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank

8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test date: Oct-2014

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Base Portability Flags (Continued)

```
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test date: Oct-2014

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
            481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
    -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
    -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
    -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
    -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
    -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test date: Oct-2014

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test date: Oct-2014

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:34:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 November 2014.