



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 318

PowerEdge R430 (Intel Xeon E5-2609 v3, 1.90 GHz)

SPECint_rate_base2006 = 307

CPU2006 license: 55


Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

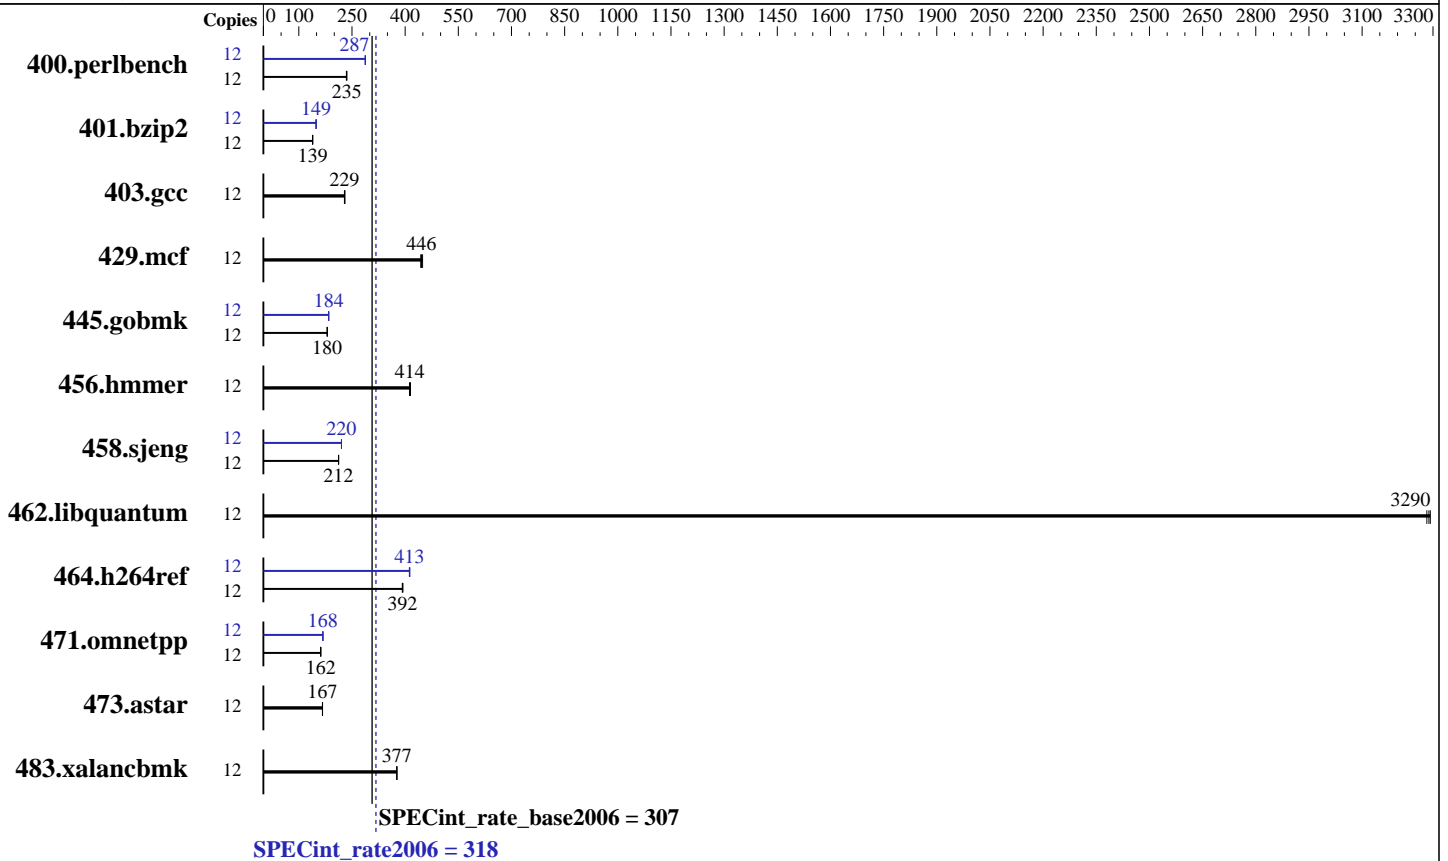

Hardware

CPU Name: Intel Xeon E5-2609 v3
 CPU Characteristics:
 CPU MHz: 1900
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 1 x 300 GB 10000 RPM SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 318

PowerEdge R430 (Intel Xeon E5-2609 v3, 1.90 GHz)

SPECint_rate_base2006 = 307

CPU2006 license: 55

Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	<u>498</u>	<u>235</u>	501	234	498	235	12	407	288	408	287	<u>408</u>	<u>287</u>
401.bzip2	12	832	139	834	139	<u>833</u>	<u>139</u>	12	778	149	778	149	<u>778</u>	<u>149</u>
403.gcc	12	<u>421</u>	<u>229</u>	422	229	420	230	12	<u>421</u>	<u>229</u>	422	229	420	230
429.mcf	12	244	449	<u>245</u>	<u>446</u>	247	444	12	244	449	<u>245</u>	<u>446</u>	247	444
445.gobmk	12	<u>699</u>	<u>180</u>	699	180	698	180	12	683	184	<u>683</u>	<u>184</u>	684	184
456.hammer	12	<u>271</u>	<u>414</u>	272	412	270	415	12	<u>271</u>	<u>414</u>	272	412	270	415
458.sjeng	12	684	212	684	212	<u>684</u>	<u>212</u>	12	659	220	<u>659</u>	<u>220</u>	659	220
462.libquantum	12	<u>75.6</u>	<u>3290</u>	75.7	3280	75.5	3290	12	<u>75.6</u>	<u>3290</u>	75.7	3280	75.5	3290
464.h264ref	12	<u>677</u>	<u>392</u>	674	394	677	392	12	<u>644</u>	<u>413</u>	645	412	643	413
471.omnetpp	12	<u>463</u>	<u>162</u>	464	162	463	162	12	447	168	<u>446</u>	<u>168</u>	446	168
473.astar	12	505	167	<u>505</u>	<u>167</u>	505	167	12	505	167	<u>505</u>	<u>167</u>	505	167
483.xalancbmk	12	220	376	220	377	<u>220</u>	<u>377</u>	12	220	376	220	377	<u>220</u>	<u>377</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
 Snoop Mode set to Cluster on Die
 Virtualization Technology disabled
 Execute Disable disabled
 System Profile set to Custom
 Memory Patrol Scrub set to Disabled
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
 running on localhost.localdomain Sat Oct 18 16:33:11 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
 model name : Intel(R) Xeon(R) CPU E5-2609 v3 @ 1.90GHz
 2 "physical id"s (chips)

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 318

PowerEdge R430 (Intel Xeon E5-2609 v3, 1.90 GHz)

SPECint_rate_base2006 = 307

CPU2006 license: 55

Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

Platform Notes (Continued)

12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      132054904 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 18 16:32
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  271G  9.7G  248G   4% /
```

```
Additional information from dmidecode:
BIOS Dell Inc. 1.0.0 10/15/2014
Memory:
4x 000000000000 Not Specified 1600 MHz 1 rank
8x 002C00B3002C 36ASF2G72PZ-2G1A2 16 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 318

PowerEdge R430 (Intel Xeon E5-2609 v3, 1.90 GHz)

SPECint_rate_base2006 = 307

CPU2006 license: 55

Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m32
C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32
400.perlbench: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 318

PowerEdge R430 (Intel Xeon E5-2609 v3, 1.90 GHz)

SPECint_rate_base2006 = 307

CPU2006 license: 55

Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3`

456.hmmmer: `basepeak = yes`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 318

PowerEdge R430 (Intel Xeon E5-2609 v3, 1.90 GHz)

SPECint_rate_base2006 = 307

CPU2006 license: 55

Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 3 10:32:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 December 2014.