



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028R-TDW  
(X10DDW-i, Intel Xeon E5-2680 v3)

SPECfp<sup>®</sup>\_rate2006 = 771

SPECfp\_rate\_base2006 = 751

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Oct-2014

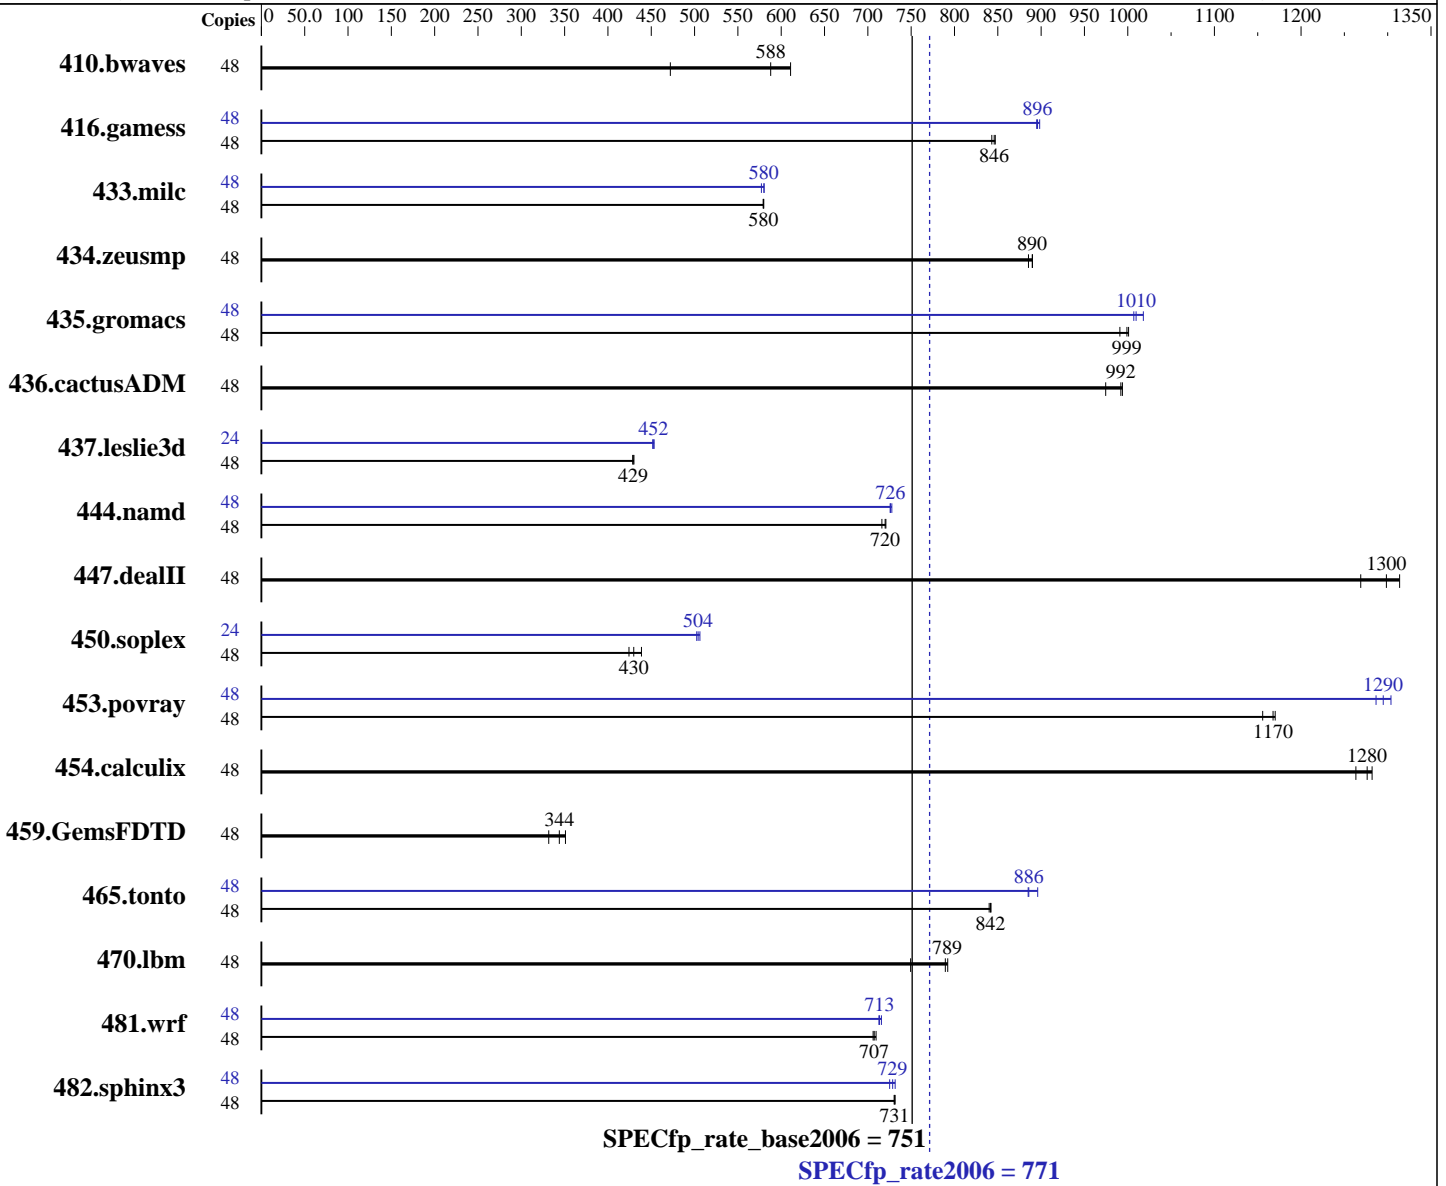

### Hardware

CPU Name: Intel Xeon E5-2680 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028R-TDW  
(X10DDW-i, Intel Xeon E5-2680 v3)

SPECfp\_rate2006 = 771

SPECfp\_rate\_base2006 = 751

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Oct-2014

L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 400 GB SATA III, SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1068	611	1382	472	<b>1110</b>	<b>588</b>	48	1068	611	1382	472	<b>1110</b>	<b>588</b>
416.gamess	48	1115	843	<b>1111</b>	<b>846</b>	1110	847	48	1046	898	1050	895	<b>1049</b>	<b>896</b>
433.milc	48	760	580	<b>760</b>	<b>580</b>	761	579	48	763	577	<b>760</b>	<b>580</b>	759	580
434.zeusmp	48	491	890	493	885	<b>491</b>	<b>890</b>	48	491	890	493	885	<b>491</b>	<b>890</b>
435.gromacs	48	<b>343</b>	<b>999</b>	346	991	342	1000	48	337	1020	<b>339</b>	<b>1010</b>	340	1010
436.cactusADM	48	<b>578</b>	<b>992</b>	577	994	589	975	48	<b>578</b>	<b>992</b>	577	994	589	975
437.leslie3d	48	1053	429	1049	430	<b>1051</b>	<b>429</b>	24	<b>499</b>	<b>452</b>	498	453	499	452
444.namd	48	<b>535</b>	<b>720</b>	534	721	538	716	48	529	728	<b>530</b>	<b>726</b>	530	726
447.dealII	48	<b>423</b>	<b>1300</b>	433	1270	418	1310	48	<b>423</b>	<b>1300</b>	433	1270	418	1310
450.soplex	48	913	439	943	424	<b>931</b>	<b>430</b>	24	398	502	<b>397</b>	<b>504</b>	395	506
453.povray	48	218	1170	221	1160	<b>219</b>	<b>1170</b>	48	198	1290	196	1300	<b>197</b>	<b>1290</b>
454.calculix	48	<b>310</b>	<b>1280</b>	313	1260	309	1280	48	<b>310</b>	<b>1280</b>	313	1260	309	1280
459.GemsFDTD	48	<b>1481</b>	<b>344</b>	1451	351	1535	332	48	<b>1481</b>	<b>344</b>	1451	351	1535	332
465.tonto	48	562	840	<b>561</b>	<b>842</b>	561	842	48	527	896	<b>533</b>	<b>886</b>	534	885
470.lbm	48	880	749	833	792	<b>835</b>	<b>789</b>	48	880	749	833	792	<b>835</b>	<b>789</b>
481.wrf	48	759	706	<b>758</b>	<b>707</b>	756	709	48	752	713	<b>751</b>	<b>713</b>	749	716
482.sphinx3	48	<b>1280</b>	<b>731</b>	1281	730	1279	731	48	1290	725	1279	732	<b>1284</b>	<b>729</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Execute Disable Bit = Disable  
Intel Virtualization Technology = Disable

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028R-TDW  
(X10DDW-i, Intel Xeon E5-2680 v3)

SPECfp\_rate2006 = 771

SPECfp\_rate\_base2006 = 751

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Oct-2014

### Platform Notes (Continued)

COD Enable = Enable  
Early Snoop = Disable

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:  
icc -m64  
C++ benchmarks:  
icpc -m64  
Fortran benchmarks:  
ifort -m64  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028R-TDW  
(X10DDW-i, Intel Xeon E5-2680 v3)

SPECfp\_rate2006 = 771

SPECfp\_rate\_base2006 = 751

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Oct-2014

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64  
450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028R-TDW  
(X10DDW-i, Intel Xeon E5-2680 v3)

SPECfp\_rate2006 = 771

SPECfp\_rate\_base2006 = 751

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Oct-2014

## Peak Portability Flags (Continued)

```
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2)
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
          -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2)
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
          -ansi-alias
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028R-TDW  
(X10DDW-i, Intel Xeon E5-2680 v3)

SPECfp\_rate2006 = 771

SPECfp\_rate\_base2006 = 751

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Oct-2014

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028R-TDW  
(X10DDW-i , Intel Xeon E5-2680 v3)

SPECfp\_rate2006 = 771

SPECfp\_rate\_base2006 = 751

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Oct-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Dec 3 10:34:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 December 2014.