



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2650L v3 @ 1.80GHz)

**SPECint\_rate2006 = 809**

**SPECint\_rate\_base2006 = 783**

**CPU2006 license:** 9019


**Test date:** Dec-2014

**Test sponsor:** Cisco Systems

**Hardware Availability:** Sep-2014

**Tested by:** Cisco Systems

**Software Availability:** Nov-2013

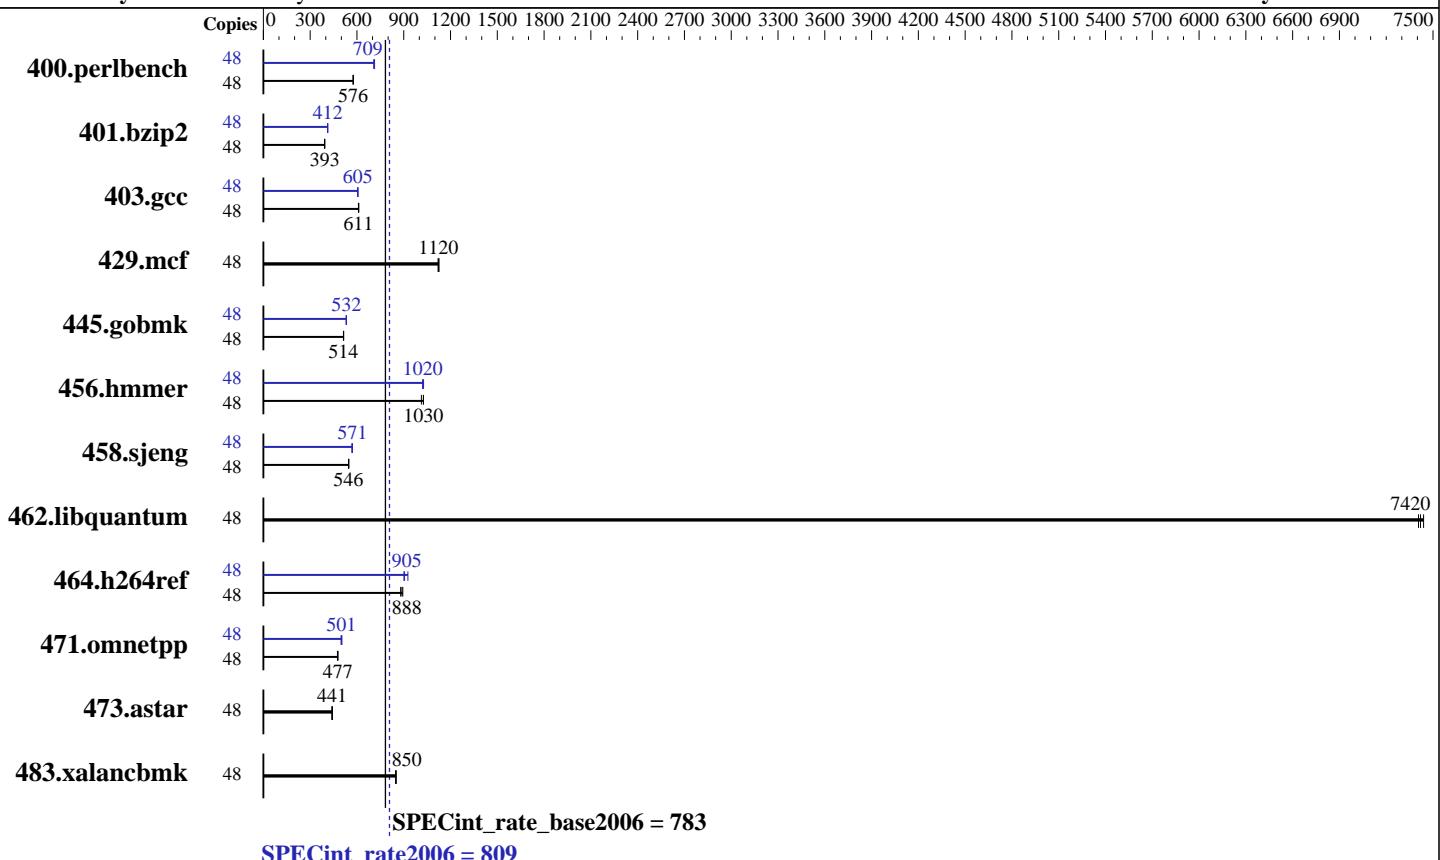

### Hardware

CPU Name:	Intel Xeon E5-2650L v3
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 300GB SAS, 15K RPM
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2650L v3 @ 1.80GHz)

**SPECint\_rate2006 = 809**

**SPECint\_rate\_base2006 = 783**

**CPU2006 license:** 9019

**Test date:** Dec-2014

**Test sponsor:** Cisco Systems

**Hardware Availability:** Sep-2014

**Tested by:** Cisco Systems

**Software Availability:** Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	812	578	816	575	<b>814</b>	<b>576</b>	48	658	713	<b>661</b>	<b>709</b>	662	709
401.bzip2	48	<b>1178</b>	<b>393</b>	1180	393	1178	393	48	1125	412	<b>1123</b>	<b>412</b>	1122	413
403.gcc	48	<b>632</b>	<b>611</b>	632	611	634	610	48	639	605	<b>639</b>	<b>605</b>	637	607
429.mcf	48	<b>390</b>	<b>1120</b>	391	1120	389	1130	48	<b>390</b>	<b>1120</b>	391	1120	389	1130
445.gobmk	48	981	513	978	515	<b>980</b>	<b>514</b>	48	<b>946</b>	<b>532</b>	945	533	949	530
456.hammer	48	442	1010	<b>436</b>	<b>1030</b>	436	1030	48	<b>438</b>	<b>1020</b>	436	1030	439	1020
458.sjeng	48	1060	548	<b>1063</b>	<b>546</b>	1063	546	48	<b>1017</b>	<b>571</b>	1017	571	1024	567
462.libquantum	48	134	7440	<b>134</b>	<b>7420</b>	134	7410	48	134	7440	<b>134</b>	<b>7420</b>	134	7410
464.h264ref	48	<b>1196</b>	<b>888</b>	1188	894	1207	880	48	1179	901	<b>1174</b>	<b>905</b>	1146	927
471.omnetpp	48	627	478	632	475	<b>629</b>	<b>477</b>	48	<b>598</b>	<b>501</b>	596	503	602	498
473.astar	48	767	440	760	443	<b>765</b>	<b>441</b>	48	767	440	760	443	<b>765</b>	<b>441</b>
483.xalancbmk	48	389	851	390	848	<b>390</b>	<b>850</b>	48	389	851	390	848	<b>390</b>	<b>850</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
CPU performance set to HPC
Power Technology set to Custom
Processor Power State C6 set to Disabled
Energy Performance BIAS setting set to Balanced Performance
Memory RAS configuration set to Maximum Performance
QPI Snoop Mode set to Cluster-on-Die
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on rhel65 Fri Dec 19 20:38:33 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650L v3 @ 1.80GHz
        2 "physical id"s (chips)
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2650L v3 @ 1.80GHz)

**SPECint\_rate2006 = 809**

**SPECint\_rate\_base2006 = 783**

**CPU2006 license:** 9019

**Test date:** Dec-2014

**Test sponsor:** Cisco Systems

**Hardware Availability:** Sep-2014

**Tested by:** Cisco Systems

**Software Availability:** Nov-2013

## Platform Notes (Continued)

```
48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 12
siblings   : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 15360 KB

From /proc/meminfo
MemTotal:      264256812 kB
HugePages_Total:    0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux rhel65 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Dec 19 20:37

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdb2        ext4  245G   11G  222G   5%  /

Additional information from dmidecode:
BIOS Cisco Systems, Inc. B200M4.2.2.3c.0.101420141352 10/14/2014
Memory:
16x 0xCE00 M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
8x NO DIMM NO DIMM

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/lib32:/opt/cpu2006-1.2/lib64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2650L v3 @ 1.80GHz)

**SPECint\_rate2006 = 809**

**SPECint\_rate\_base2006 = 783**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

## General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

400.perlbench: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2650L v3 @ 1.80GHz)

**SPECint\_rate2006 = 809**

**SPECint\_rate\_base2006 = 783**

**CPU2006 license:** 9019

**Test date:** Dec-2014

**Test sponsor:** Cisco Systems

**Hardware Availability:** Sep-2014

**Tested by:** Cisco Systems

**Software Availability:** Nov-2013

## Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2650L v3 @ 1.80GHz)

**SPECint\_rate2006 = 809**

**SPECint\_rate\_base2006 = 783**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jan 14 10:29:04 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 January 2015.