



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

### SPECint®\_rate2006 = 731

### Huawei CH121 V3 (Intel Xeon E5-2640 v3)

### SPECint\_rate\_base2006 = 702

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

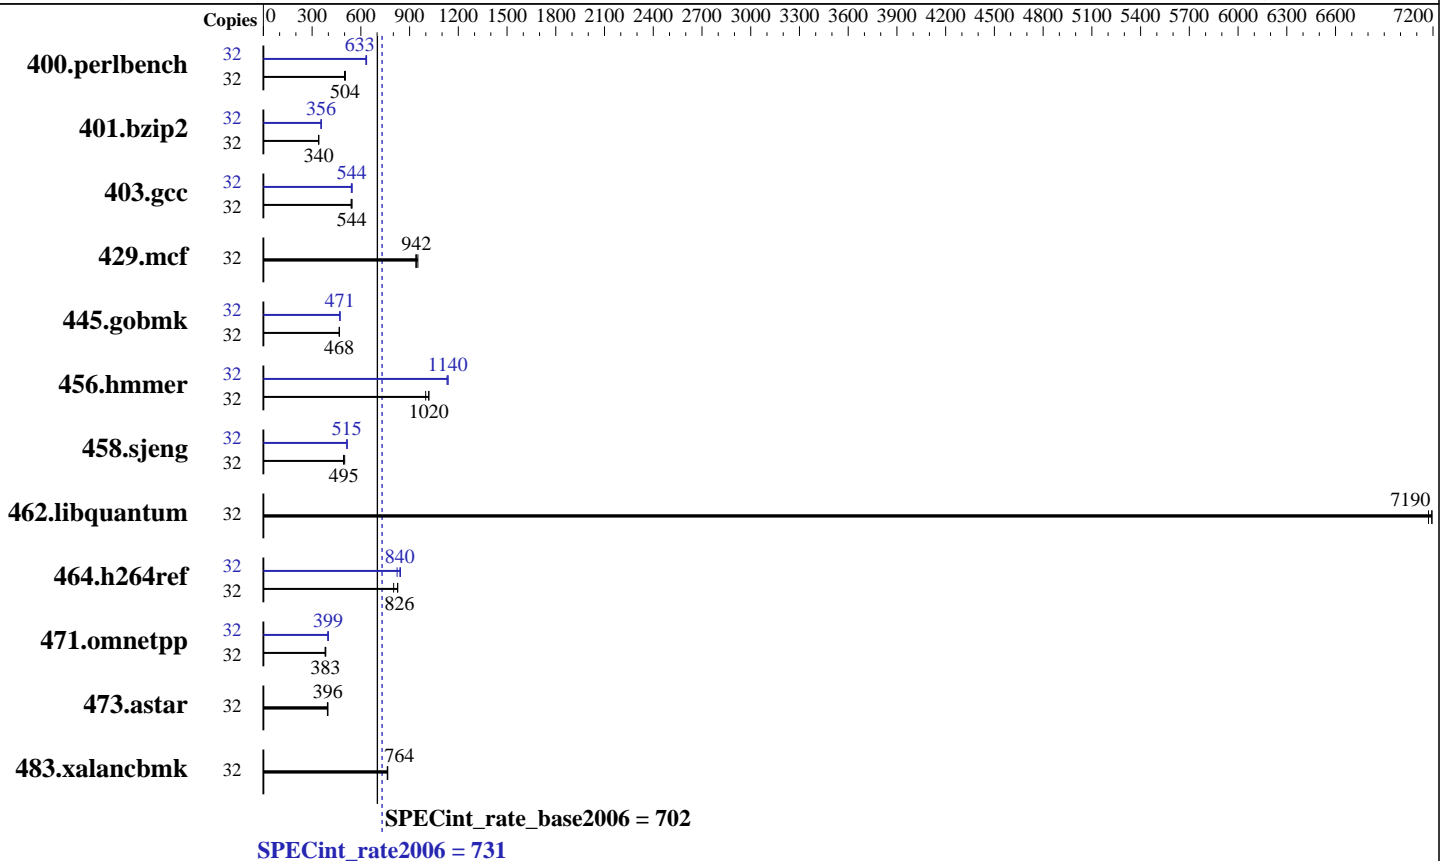

### Hardware

CPU Name: Intel Xeon E5-2640 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1867 MHz)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECint\_rate2006 = 731

Huawei CH121 V3 (Intel Xeon E5-2640 v3)

SPECint\_rate\_base2006 = 702

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	620	504	626	499	<u>621</u>	<u>504</u>	32	492	635	<u>494</u>	<u>633</u>	495	632
401.bzip2	32	907	340	908	340	<u>907</u>	<u>340</u>	32	<u>868</u>	<u>356</u>	869	355	868	356
403.gcc	32	472	545	477	540	<u>474</u>	<u>544</u>	32	471	546	<u>473</u>	<u>544</u>	476	541
429.mcf	32	307	951	311	938	<u>310</u>	<u>942</u>	32	307	951	311	938	<u>310</u>	<u>942</u>
445.gobmk	32	718	468	<u>718</u>	<u>468</u>	718	467	32	<u>713</u>	<u>471</u>	713	471	712	472
456.hammer	32	<u>293</u>	<u>1020</u>	293	1020	299	999	32	263	1140	<u>263</u>	<u>1140</u>	264	1130
458.sjeng	32	784	494	774	500	<u>783</u>	<u>495</u>	32	<u>753</u>	<u>515</u>	753	514	751	515
462.libquantum	32	92.4	7170	<u>92.2</u>	<u>7190</u>	92.2	7190	32	92.4	7170	<u>92.2</u>	<u>7190</u>	92.2	7190
464.h264ref	32	883	802	<u>858</u>	<u>826</u>	856	827	32	839	844	<u>843</u>	<u>840</u>	860	823
471.omnetpp	32	522	383	527	380	<u>522</u>	<u>383</u>	32	500	400	505	396	<u>502</u>	<u>399</u>
473.astar	32	566	397	<u>567</u>	<u>396</u>	570	394	32	566	397	<u>567</u>	<u>396</u>	570	394
483.xalancbmk	32	290	763	288	766	<u>289</u>	<u>764</u>	32	290	763	288	766	<u>289</u>	<u>764</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Custom  
Set Snoop Mode to ES  
Set Patrol Scrub to Disable  
Baseboard Management Controller used to adjust the fan speed to 100%  
Sysinfo program /spec15/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Wed Dec 24 12:57:50 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2640 v3 @ 2.60GHz
2 "physical id"s (chips)
32 "processors"
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 731

Huawei CH121 V3 (Intel Xeon E5-2640 v3)

SPECint\_rate\_base2006 = 702

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      263719632 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 24 12:52

SPEC is set to: /spec15

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   510G  188G  323G  37% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 1.19 10/10/2014

Memory:

```
8x NO DIMM NO DIMM 3 rank
8x Samsung M393A2G40DB0-CPB 16 GB 1 rank 2133 MHz, configured at 1867 MHz
8x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1867 MHz
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 731

Huawei CH121 V3 (Intel Xeon E5-2640 v3)

SPECint\_rate\_base2006 = 702

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec15/libs/32:/spec15/libs/64:/spec15/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Huawei CH121 V3 and Huawei CH222 V3

are electronically equivalent.

The results have been measured on a Huawei CH121 V3 model

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 731

Huawei CH121 V3 (Intel Xeon E5-2640 v3)

SPECint\_rate\_base2006 = 702

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

## Base Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 731

Huawei CH121 V3 (Intel Xeon E5-2640 v3)

SPECint\_rate\_base2006 = 702

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

## Peak Optimization Flags (Continued)

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.2.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 731

Huawei CH121 V3 (Intel Xeon E5-2640 v3)

SPECint\_rate\_base2006 = 702

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jan 27 13:27:37 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 January 2015.