



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S6 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp®_rate2006 = 690

SPECfp_rate_base2006 = 673

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

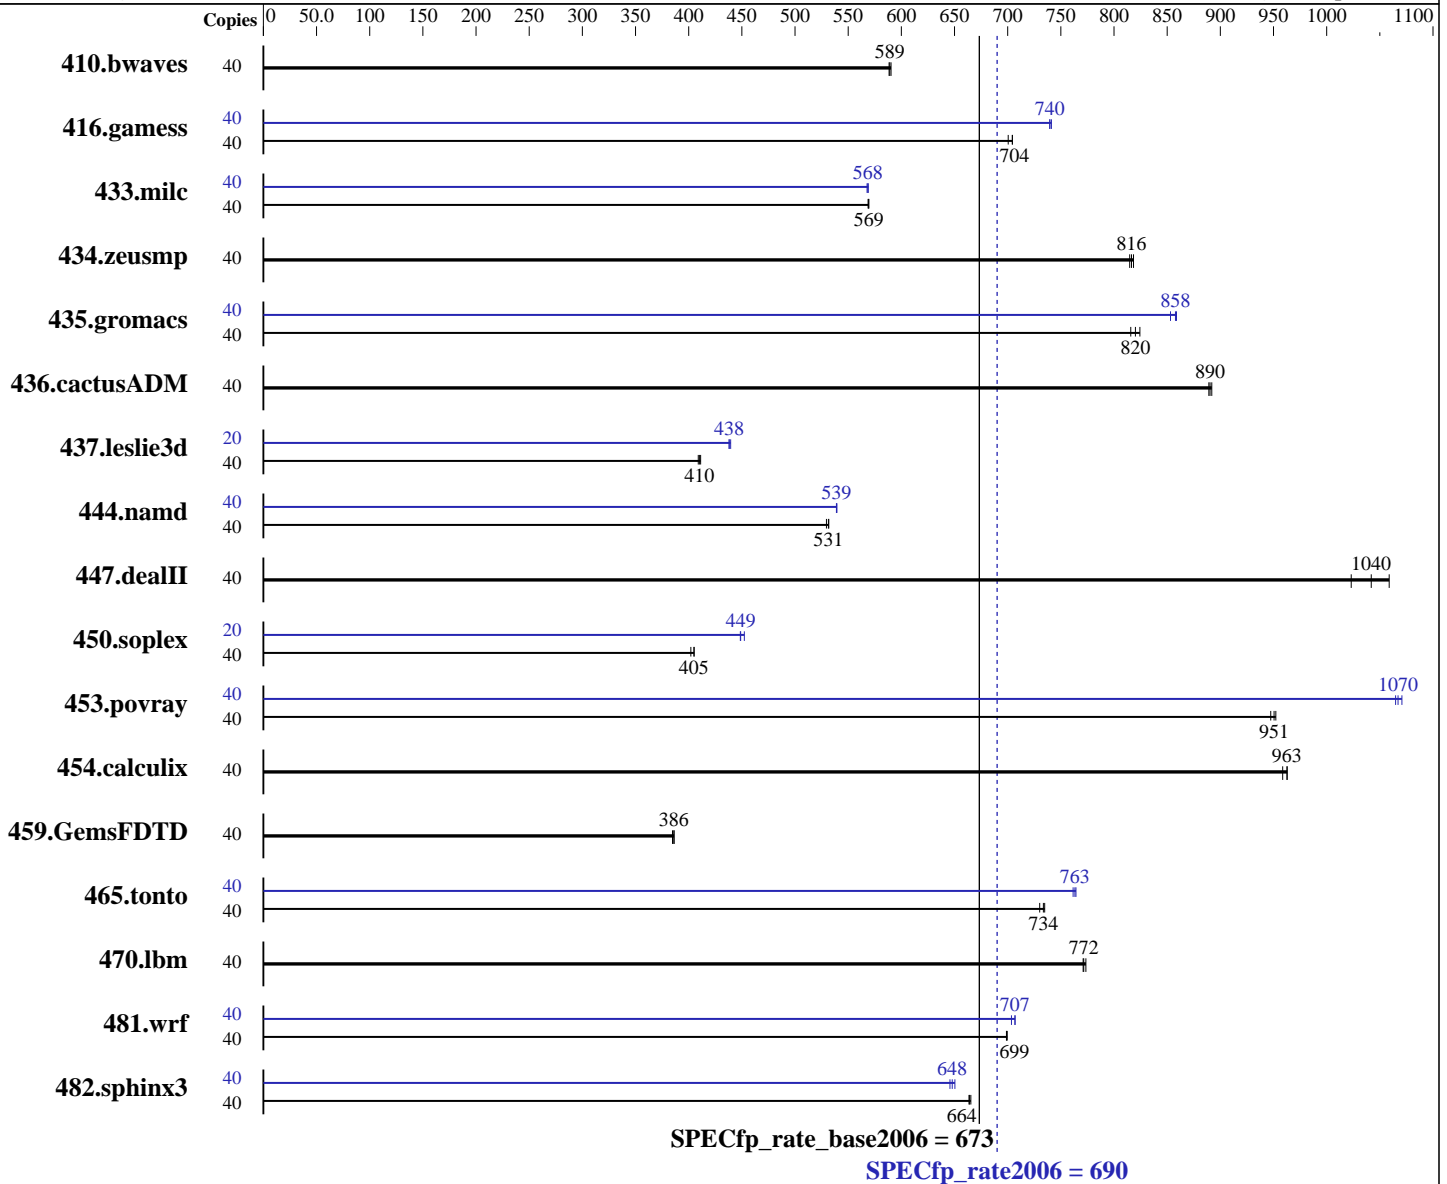

Hardware

CPU Name: Intel Xeon E5-2650 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.11.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S6 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp_rate2006 = **690**

SPECfp_rate_base2006 = **673**

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 240 GB SATA II SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	921	590	<u>923</u>	<u>589</u>	924	588	40	921	590	<u>923</u>	<u>589</u>	924	588
416.gamess	40	1112	704	1118	700	<u>1112</u>	<u>704</u>	40	<u>1059</u>	<u>740</u>	1059	740	1057	741
433.milc	40	<u>645</u>	<u>569</u>	645	569	646	569	40	645	569	<u>646</u>	<u>568</u>	647	568
434.zeusmp	40	445	818	<u>446</u>	<u>816</u>	447	815	40	445	818	<u>446</u>	<u>816</u>	447	815
435.gromacs	40	350	816	346	824	<u>348</u>	<u>820</u>	40	333	859	<u>333</u>	<u>858</u>	335	853
436.cactusADM	40	538	889	<u>537</u>	<u>890</u>	536	892	40	538	889	<u>537</u>	<u>890</u>	536	892
437.leslie3d	40	<u>917</u>	<u>410</u>	914	411	919	409	20	429	438	<u>429</u>	<u>438</u>	428	439
444.namd	40	<u>604</u>	<u>531</u>	603	532	606	530	40	<u>595</u>	<u>539</u>	595	539	595	539
447.dealII	40	432	1060	447	1020	<u>439</u>	<u>1040</u>	40	432	1060	447	1020	<u>439</u>	<u>1040</u>
450.soplex	40	830	402	<u>824</u>	<u>405</u>	823	405	20	372	449	369	452	<u>372</u>	<u>449</u>
453.povray	40	225	947	<u>224</u>	<u>951</u>	223	952	40	200	1060	<u>199</u>	<u>1070</u>	199	1070
454.calculix	40	344	959	<u>343</u>	<u>963</u>	343	963	40	344	959	<u>343</u>	<u>963</u>	343	963
459.GemsFDTD	40	<u>1099</u>	<u>386</u>	1099	386	1103	385	40	<u>1099</u>	<u>386</u>	1099	386	1103	385
465.tonto	40	<u>537</u>	<u>734</u>	539	730	536	735	40	515	764	<u>516</u>	<u>763</u>	517	762
470.lbm	40	711	774	<u>712</u>	<u>772</u>	713	771	40	711	774	<u>712</u>	<u>772</u>	713	771
481.wrf	40	<u>639</u>	<u>699</u>	639	700	639	699	40	635	704	<u>632</u>	<u>707</u>	632	707
482.sphinx3	40	<u>1174</u>	<u>664</u>	1175	664	1172	665	40	1207	646	1199	650	<u>1203</u>	<u>648</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings
Power Technology = Energy Efficient

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S6 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp_rate2006 = 690

SPECfp_rate_base2006 = 673

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

Enforce POR = Disabled
COD Enable = Enable

BMC Setting
Fan Mode = Full Speed

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Tue Jan 20 08:36:25 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2650 v3 @ 2.30GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 10
  siblings      : 20
  physical 0:   cores 0 1 2 3 4 8 9 10 11 12
  physical 1:   cores 0 1 2 3 4 8 9 10 11 12
cache size     : 12800 KB
```

```
From /proc/meminfo
MemTotal:      264422480 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-358.11.1.el6.x86_64 #1 SMP Tue Nov 19 17:43:04 CET 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 20 08:34
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal        ext4      193G  43G  141G  24% /
```

Additional information from dmidecode:
BIOS American Megatrends Inc. 1.0b 10/29/2014
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 690

ACTINA SOLAR 210 S6 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp_rate_base2006 = 673

CPU2006 license: 9008

Test date: Jan-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

Platform Notes (Continued)

Memory:

16x 16 GB

2x Samsung (date:14/33) M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank

14x Samsung (date:14/4p) M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 16 GB were used to run the test (256 GB total)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2670 v3 chips + 128 GB memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S6 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp_rate2006 = 690

SPECfp_rate_base2006 = 673

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Base Portability Flags (Continued)

```

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
482.sphinx3: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S6 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp_rate2006 = 690

SPECfp_rate_base2006 = 673

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S6 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp_rate2006 = 690

SPECfp_rate_base2006 = 673

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S6 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp_rate2006 = 690

SPECfp_rate_base2006 = 673

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Feb 25 11:29:32 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 February 2015.