



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation


Fujitsu Fujitsu SPARC M10-4S

SPECint®_rate2006 = 2180

SPECint_rate_base2006 = 1910

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2015
Hardware Availability: Apr-2014
Software Availability: Jan-2015

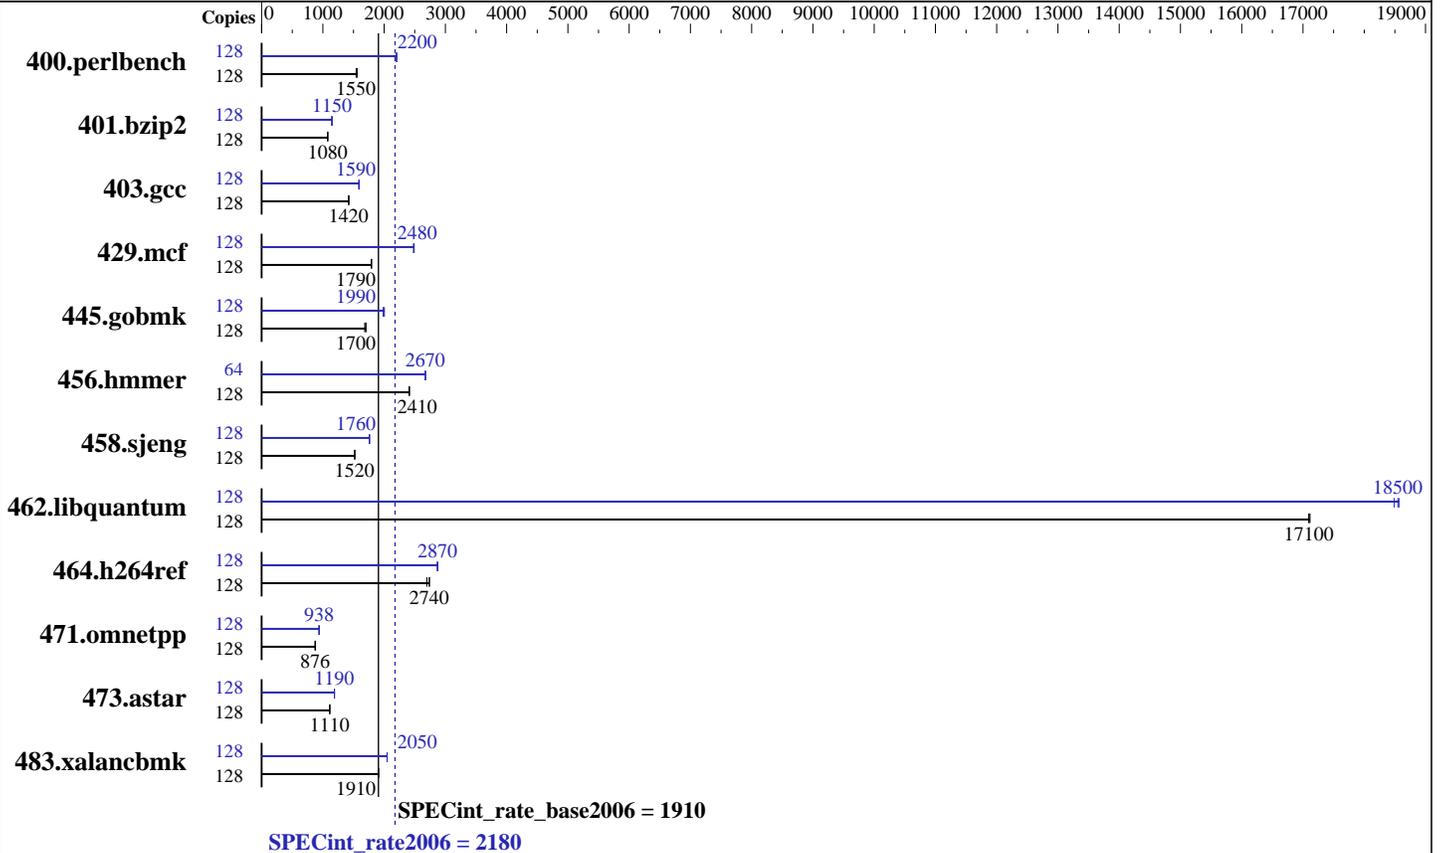

Hardware

CPU Name: SPARC64 X+
 CPU Characteristics:
 CPU MHz: 3700
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 16 BBs;
 each BB contains 2 or 4 CPU chips;
 each CPU chip contains 0, 1, 2, .. 32 active threads;
 the number of orderable total cores is 4, 6, 8, .. 1024
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 24 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: tmpfs
 600 GB 10,025 RPM Toshiba MBF2600RC SAS (for system disk)
 Other Hardware: None

Software

Operating System: Solaris 11.2 SRU 6.4
 Compiler: C/C++: Version 12.4 of Oracle Solaris Studio
 Auto Parallel: No
 File System: tmpfs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4S

SPECint_rate2006 = 2180

SPECint_rate_base2006 = 1910

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2015
Hardware Availability: Apr-2014
Software Availability: Jan-2015

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	810	1540	802	1560	806	1550	128	568	2200	568	2200	568	2200
401.bzip2	128	1144	1080	1143	1080	1147	1080	128	1079	1140	1074	1150	1074	1150
403.gcc	128	724	1420	725	1420	725	1420	128	647	1590	649	1590	648	1590
429.mcf	128	652	1790	651	1790	650	1800	128	469	2490	470	2480	470	2480
445.gobmk	128	789	1700	789	1700	798	1680	128	675	1990	670	2000	676	1990
456.hammer	128	496	2410	495	2410	495	2410	64	223	2670	223	2670	223	2670
458.sjeng	128	1018	1520	1020	1520	1018	1520	128	880	1760	879	1760	880	1760
462.libquantum	128	155	17100	155	17100	155	17100	128	143	18500	143	18600	143	18500
464.h264ref	128	1050	2700	1035	2740	1034	2740	128	986	2870	988	2870	986	2870
471.omnetpp	128	914	876	913	876	915	875	128	852	938	852	938	852	938
473.astar	128	807	1110	808	1110	807	1110	128	756	1190	756	1190	756	1190
483.xalancbmk	128	463	1910	463	1910	463	1910	128	431	2050	431	2050	431	2050

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Shell Environments:

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

The "Logical Domains Manager" service was turned off using the command "svcadm disable ldmd".

System Tunables:

(/etc/system parameters)

autoup = 1555200

Causes pages older than the listed number of seconds to be written by fsflush.

tune_t_fsflushr = 259200

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

Platform Notes

Sysinfo program /export/cpu2006-v1.2/config/sysinfo

\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 5ec117938769af2bf59ae0ed87ea9ccd

running on 4S-1049-D0 Mon Feb 9 15:36:41 2015

This section contains SUT (System Under Test) info as seen by

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4S

SPECint_rate2006 = 2180

SPECint_rate_base2006 = 1910

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2015
Hardware Availability: Apr-2014
Software Availability: Jan-2015

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /usr/sbin/psrinfo
SPARC64-X+ (chipid 0, clock 3700 MHz)
SPARC64-X+ (chipid 1, clock 3700 MHz)
SPARC64-X+ (chipid 2, clock 3700 MHz)
SPARC64-X+ (chipid 3, clock 3700 MHz)
4 chips
128 threads
3700 MHz
```

From kstat: 64 cores

From prtconf: 522496 Megabytes

```
/etc/release:
Oracle Solaris 11.2 SPARC
uname -a:
SunOS 4S-1049-D0 5.11 11.2 sun4v sparcsun4v
```

```
disk: df -h $SPEC
Filesystem      Size  Used Available Capacity  Mounted on
rpool/export    547G  2.9G    401G      1%    /export
```

(End of data from sysinfo program)

General Notes

The Building Block (BB) is just a Fujitsu SPARC M10-4S that is the basic unit to be expanded as if stacking up children's blocks.

File System:
tmpfs: output_root was used to put run directories in /tmp/cpu2006
zfs: operating system

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4S

SPECint_rate2006 = 2180

SPECint_rate_base2006 = 1910

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2015
Hardware Availability: Apr-2014
Software Availability: Jan-2015

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-fast -xtarget=sparc64xplus -xipo=2 -xpagesize=4M -xsegment_align=4M
-xalias_level=std

C++ benchmarks:
-fast -xtarget=sparc64xplus -xipo=2 -xpagesize=4M -xsegment_align=4M
-xalias_level=compatible -library=stlport4 -lfast

Base Other Flags

C benchmarks:
-xjobs=8

C++ benchmarks:
-xjobs=8

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4S

SPECint_rate2006 = 2180

SPECint_rate_base2006 = 1910

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2015
Hardware Availability: Apr-2014
Software Availability: Jan-2015

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xprofile=collect:./feedback(pass 1)
               -xprofile=use:./feedback(pass 2) -fast
               -xtarget=sparc64xplus -xpagesize=4M -xsegment_align=256M
               -xipo=1 -xalias_level=std -xrestrict -xprefetch=no%auto
               -xO4 -lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast
            -xtarget=sparc64xplus -xpagesize=4M -xsegment_align=256M
            -xalias_level=strong -xprefetch=no%auto
            -W2,-Ainline:rs=1000 -W2,-Ainline:cs=500
            -W2,-Ainline:inc=60 -lfast

403.gcc: -xprofile=collect:./feedback(pass 1)
          -xprofile=use:./feedback(pass 2) -fast
          -xtarget=sparc64xplus -xpagesize=4M -xsegment_align=256M
          -xO4 -xipo=2 -xprefetch=no%auto

429.mcf: -xprofile=collect:./feedback(pass 1)
          -xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64vii
          -xipo=2 -xpagesize=4M -xalias_level=std -xprefetch_level=1
          -xprefetch=latx:0.2 -W2,-Asac

445.gobmk: -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast
            -xtarget=sparc64xplus -xpagesize=4M -xsegment_align=256M
            -xO4 -xalias_level=std -xrestrict -xprefetch=no%auto
            -Wc,-Qiselect-funcalign=64

456.hmmr: -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast
            -xtarget=sparc64xplus -xpagesize=4M -xsegment_align=256M
            -xipo=1 -xalias_level=std -xunroll=8 -Wc,-Qms_pipe-pref

458.sjeng: -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast
            -xtarget=sparc64xplus -xpagesize=4M -xsegment_align=256M
            -xO4 -xipo=2 -xalias_level=std -xprefetch=no%auto
            -Wc,-Qlu-en=1-t=4

462.libquantum: -fast -xtarget=sparc64xplus -xpagesize=4M
                 -xsegment_align=256M -m64 -xipo=2 -xprefetch=no%auto
                 -lbsdmalloc

464.h264ref: -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast
              -xtarget=sparc64xplus -xpagesize=4M -xsegment_align=256M
              -xalias_level=strong -xipo=1 -Wc,-Qiselect-funcalign=64

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4S

SPECint_rate2006 = 2180

SPECint_rate_base2006 = 1910

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2015
Hardware Availability: Apr-2014
Software Availability: Jan-2015

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xtarget=sparc64xplus -xpagesize=4M -xsegment_align=256M
-xipo=1 -xalias_level=compatible -xunroll=2
-xprefetch_level=3 -W2,-Asac -library=stlport4 -lfast

473.astar: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xtarget=sparc64xplus -xpagesize=4M -xsegment_align=256M
-xipo=2 -xalias_level=compatible -xunroll=6
-xrestrict=%source
-xprefetch_auto_type=indirect_array_access -library=stlport4
-lfast

483.xalancbmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xtarget=sparc64xplus -xpagesize=4M -xsegment_align=256M
-xipo=2 -xalias_level=compatible -xdepend
-xprefetch_level=3 -xprefetch=latx:0.4 -library=stlport4
-W2,-Asac -lfast

Peak Other Flags

C benchmarks:
-xjobs=8

C++ benchmarks:
-xjobs=8

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.4.html>
<http://www.spec.org/cpu2006/flags/Fujitsu-Mseries.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.4.xml>
<http://www.spec.org/cpu2006/flags/Fujitsu-Mseries.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4S

SPECint_rate2006 = 2180

SPECint_rate_base2006 = 1910

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2015

Hardware Availability: Apr-2014

Software Availability: Jan-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Apr 29 14:57:53 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 April 2015.