



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SAE-M motherboard
(X11SAE-M , Intel Xeon E3-1270 v5)

SPECint®2006 = 74.8

SPECint_base2006 = 72.9

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

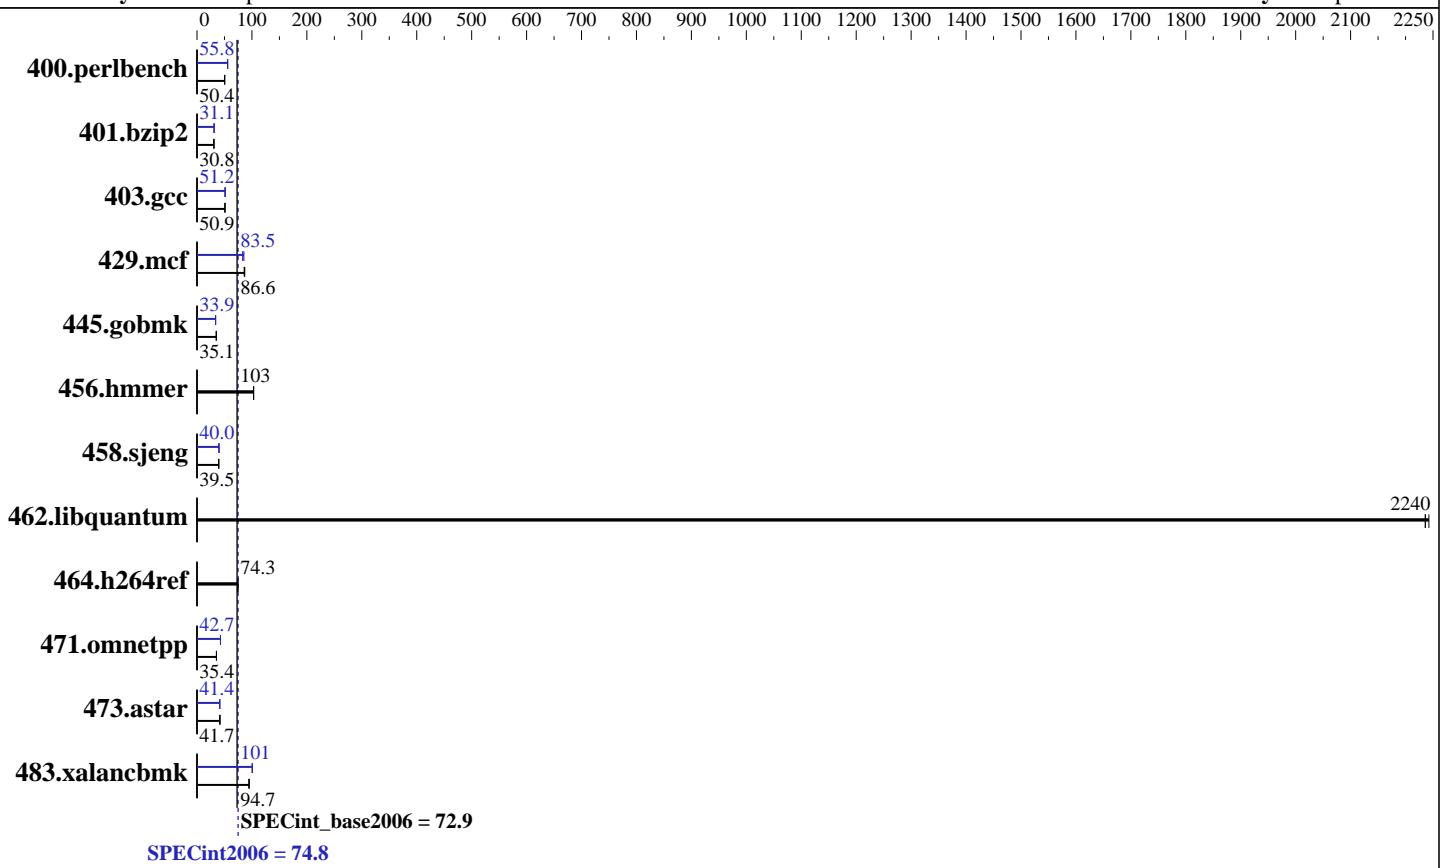

Hardware

CPU Name:	Intel Xeon E3-1270 v5
CPU Characteristics:	Intel Turbo Boost Technology up to 4.00 GHz
CPU MHz:	3600
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (2 x 16 GB 2Rx8 PC4-2133P-E)
Disk Subsystem:	1 x 400 GB SATA III SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SAE-M motherboard
(X11SAE-M , Intel Xeon E3-1270 v5)

SPECint2006 = 74.8

SPECint_base2006 = 72.9

CPU2006 license: 001176

Test date: Feb-2016

Test sponsor: Supermicro

Hardware Availability: Oct-2015

Tested by: Supermicro

Software Availability: Sep-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	193	50.6	195	50.1	<u>194</u>	<u>50.4</u>	175	55.8	175	55.7	<u>175</u>	<u>55.8</u>
401.bzip2	315	30.7	<u>314</u>	<u>30.8</u>	313	30.8	<u>310</u>	<u>31.1</u>	310	31.1	310	31.2
403.gcc	158	50.9	158	50.9	<u>158</u>	<u>50.9</u>	158	51.0	157	51.3	<u>157</u>	<u>51.2</u>
429.mcf	<u>105</u>	<u>86.6</u>	105	86.8	106	85.9	110	83.3	<u>109</u>	<u>83.5</u>	107	85.4
445.gobmk	298	35.2	<u>298</u>	<u>35.1</u>	299	35.1	<u>310</u>	<u>33.9</u>	310	33.9	310	33.8
456.hmmer	90.6	103	<u>90.6</u>	<u>103</u>	90.5	103	90.6	103	<u>90.6</u>	<u>103</u>	90.5	103
458.sjeng	306	39.5	<u>306</u>	<u>39.5</u>	306	39.5	303	40.0	302	40.1	<u>302</u>	<u>40.0</u>
462.libquantum	9.27	2240	<u>9.27</u>	<u>2240</u>	9.24	2240	<u>9.27</u>	<u>2240</u>	<u>9.27</u>	<u>2240</u>	9.24	2240
464.h264ref	298	74.3	297	74.6	<u>298</u>	<u>74.3</u>	298	74.3	297	74.6	<u>298</u>	<u>74.3</u>
471.omnetpp	<u>177</u>	<u>35.4</u>	177	35.3	176	35.5	146	42.7	<u>146</u>	<u>42.7</u>	146	42.8
473.astar	<u>168</u>	<u>41.7</u>	168	41.7	169	41.6	169	41.5	170	41.3	<u>170</u>	<u>41.4</u>
483.xalancbmk	<u>72.8</u>	<u>94.7</u>	72.8	94.7	72.8	94.8	<u>68.6</u>	<u>101</u>	68.3	101	68.7	100

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

As tested, the system used a Supermicro CSE-731i-300B chassis.

The chassis is configured with 2 PWS-305-PQ redundant power supply, 1 SNK-P0046A4 heatsink, as well as 1 FAN-0108L4 rear cooling fan.

BIOS Settings:

Hyper-threading = Disabled

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on X10SRA-01 Mon Feb 1 18:43:54 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1270 v5 @ 3.60GHz
  1 "physical id"s (chips)
  4 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SAE-M motherboard
(X11SAE-M , Intel Xeon E3-1270 v5)

SPECint2006 = 74.8

SPECint_base2006 = 72.9

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Platform Notes (Continued)

```
caution.)  
    cpu cores : 4  
    siblings   : 4  
    physical 0: cores 0 1 2 3  
    cache size : 8192 KB  
  
From /proc/meminfo  
MemTotal:      32760744 kB  
HugePages_Total:       0  
Hugepagesize:     2048 kB  
  
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux Server"  
  VERSION="7.1 (Maipo)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VERSION_ID="7.1"  
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"  
  ANSI_COLOR="0;31"  
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"  
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server  
  
uname -a:  
Linux X10SRA-01 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015  
x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Feb 1 18:41  
  
SPEC is set to: /usr/cpu2006  
Filesystem      Type  Size  Used Avail Use% Mounted on  
 /dev/sda2        xfs   183G   5.3G  178G   3% /  
Additional information from dmidecode:  
  
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.  
  
BIOS American Megatrends Inc. 1.0a 12/21/2015  
Memory:  
 2x Not Specified Not Specified  
 2x Samsung M391A2K43BB1-CPB 16 GB 2 rank 2133 MHz  
  
(End of data from sysinfo program)
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SAE-M motherboard
(X11SAE-M , Intel Xeon E3-1270 v5)

SPECint2006 = 74.8

SPECint_base2006 = 72.9

CPU2006 license: 001176

Test date: Feb-2016

Test sponsor: Supermicro

Hardware Availability: Oct-2015

Tested by: Supermicro

Software Availability: Sep-2015

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"  
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"  
OMP_NUM_THREADS = "4"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
403.gcc: -DSPEC_CPU_LP64  
429.mcf: -DSPEC_CPU_LP64  
445.gobmk: -DSPEC_CPU_LP64  
456.hammer: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX  
464.h264ref: -DSPEC_CPU_LP64  
471.omnetpp: -DSPEC_CPU_LP64  
473.astar: -DSPEC_CPU_LP64  
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SAE-M motherboard
(X11SAE-M , Intel Xeon E3-1270 v5)

SPECint2006 = 74.8

SPECint_base2006 = 72.9

CPU2006 license: 001176

Test date: Feb-2016

Test sponsor: Supermicro

Hardware Availability: Oct-2015

Tested by: Supermicro

Software Availability: Sep-2015

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmr: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch

-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div

-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SAE-M motherboard
(X11SAE-M , Intel Xeon E3-1270 v5)

SPECint2006 = 74.8

SPECint_base2006 = 72.9

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

401.bzip2 (continued):
 -opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
 -opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmr: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2)
 -opt-ra-region-strategy=block -ansi-alias
 -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
 -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
 -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SAE-M motherboard
(X11SAE-M , Intel Xeon E3-1270 v5)

SPECint2006 = 74.8

SPECint_base2006 = 72.9

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 23 17:36:44 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 February 2016.