



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp<sup>®</sup>\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Feb-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

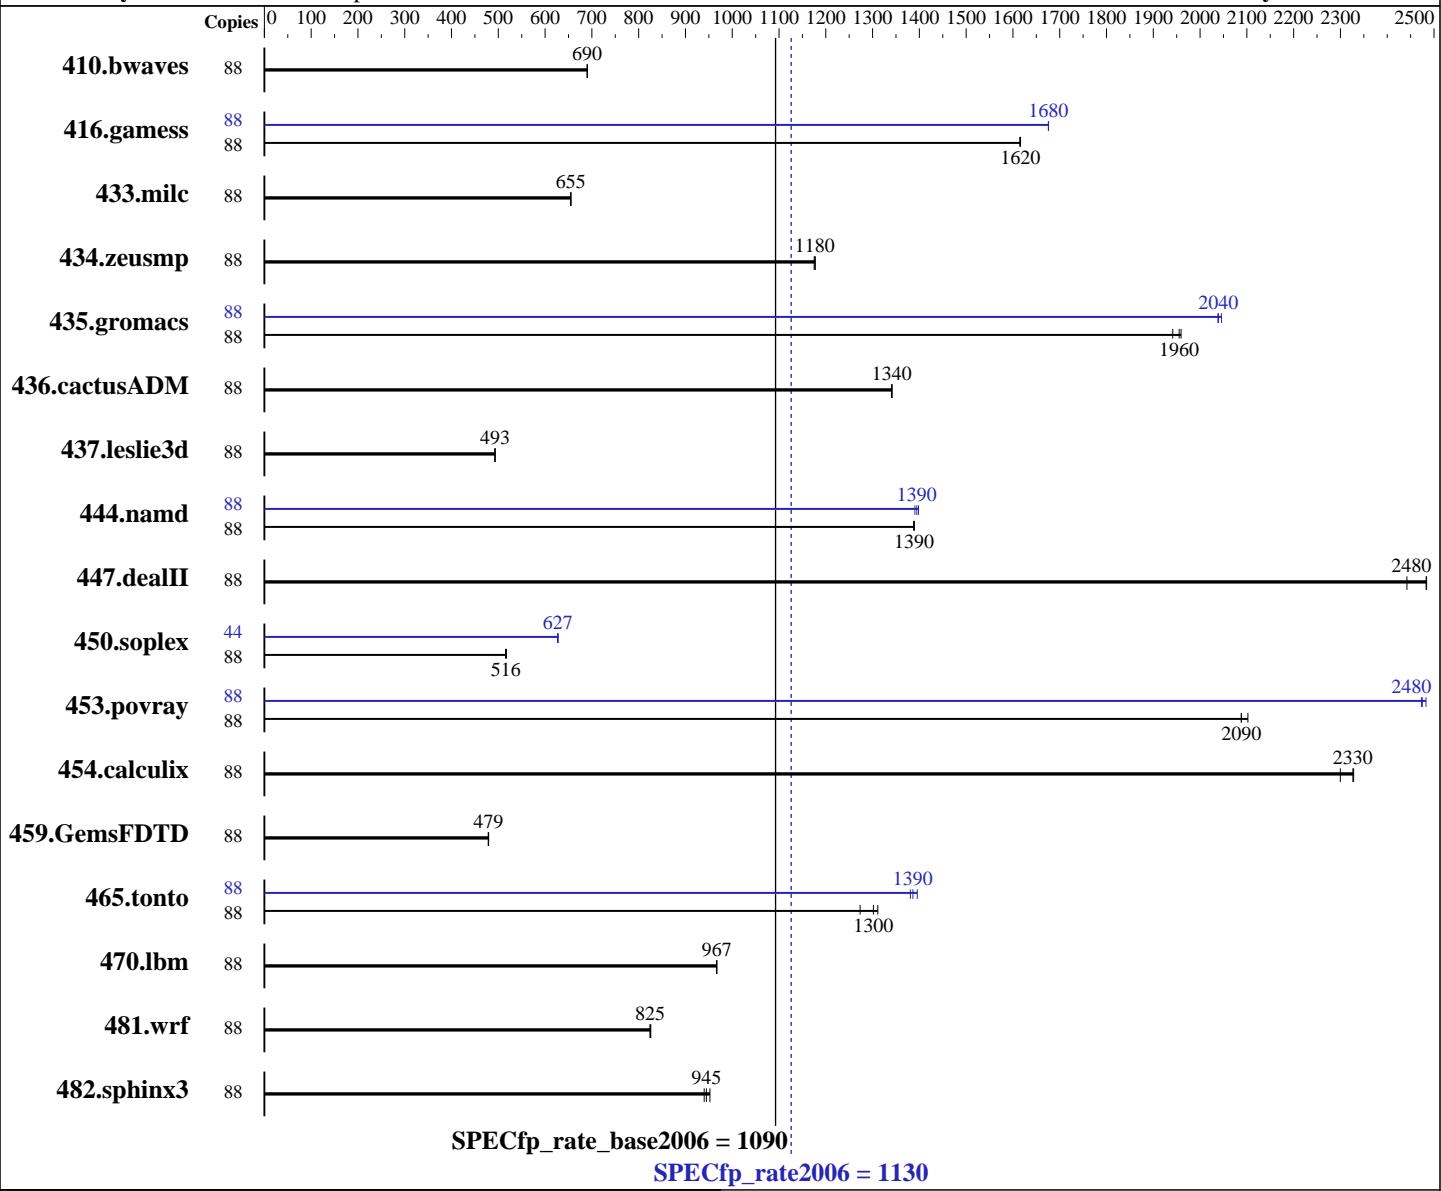

### Hardware

CPU Name: Intel Xeon E5-2699 v4  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
Compiler: Kernel 3.12.49-11-default  
C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: xfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

**CPU2006 license:** 9017

**Test date:** Feb-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

L3 Cache: 55 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	88	<b>1733</b>	<b>690</b>	1733	690	1733	690	88	<b>1733</b>	<b>690</b>	1733	690	1733	690
416.gamess	88	1067	1610	<b>1066</b>	<b>1620</b>	1066	1620	88	<b>1028</b>	<b>1680</b>	1028	1680	1028	1680
433.milc	88	1234	655	1233	655	<b>1233</b>	<b>655</b>	88	1234	655	1233	655	<b>1233</b>	<b>655</b>
434.zeusmp	88	681	1180	680	1180	<b>681</b>	<b>1180</b>	88	681	1180	680	1180	<b>681</b>	<b>1180</b>
435.gromacs	88	321	1960	324	1940	<b>321</b>	<b>1960</b>	88	308	2040	307	2050	<b>308</b>	<b>2040</b>
436.cactusADM	88	784	1340	785	1340	<b>784</b>	<b>1340</b>	88	784	1340	785	1340	<b>784</b>	<b>1340</b>
437.leslie3d	88	<b>1678</b>	<b>493</b>	1677	493	1679	493	88	<b>1678</b>	<b>493</b>	1677	493	1679	493
444.namd	88	508	1390	<b>508</b>	<b>1390</b>	509	1390	88	508	1390	505	1400	<b>506</b>	<b>1390</b>
447.dealII	88	405	2480	412	2440	<b>405</b>	<b>2480</b>	88	405	2480	412	2440	<b>405</b>	<b>2480</b>
450.soplex	88	1418	518	<b>1423</b>	<b>516</b>	1424	516	44	586	627	<b>585</b>	<b>627</b>	584	628
453.povray	88	224	2090	223	2100	<b>224</b>	<b>2090</b>	88	189	2480	189	2470	<b>189</b>	<b>2480</b>
454.calculix	88	316	2300	312	2330	<b>312</b>	<b>2330</b>	88	316	2300	312	2330	<b>312</b>	<b>2330</b>
459.GemsFDTD	88	1951	479	<b>1950</b>	<b>479</b>	1948	479	88	1951	479	<b>1950</b>	<b>479</b>	1948	479
465.tonto	88	660	1310	<b>665</b>	<b>1300</b>	680	1270	88	<b>625</b>	<b>1390</b>	627	1380	621	1400
470.lbm	88	1251	967	1250	967	<b>1251</b>	<b>967</b>	88	1251	967	1250	967	<b>1251</b>	<b>967</b>
481.wrf	88	1190	826	1192	824	<b>1192</b>	<b>825</b>	88	1190	826	1192	824	<b>1192</b>	<b>825</b>
482.sphinx3	88	1824	940	1801	952	<b>1815</b>	<b>945</b>	88	1824	940	1801	952	<b>1815</b>	<b>945</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

**CPU2006 license:** 9017

**Test date:** Feb-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

## Platform Notes

### BIOS Configuration:

Operating Mode set to "Maximum Performance"  
COD Preference set to Enable  
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1  
running on DaAn-mlk-sles12sp1 Tue Feb 9 19:49:10 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
        2 "physical id"s (chips)
        88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 22
        siblings : 44
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
cache size : 28160 KB
```

```
From /proc/meminfo
MemTotal:      263821296 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux DaAn-mlk-sles12sp1 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC
2015 (8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

**CPU2006 license:** 9017

**Test date:** Feb-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

## Platform Notes (Continued)

run-level 3 Feb 9 07:44

```
SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdb3        xfs   650G   11G   640G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO -[TBE123A-T-1.00]- 01/22/2016

Memory:

```
 8x NO DIMM Unknown
 16x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

**CPU2006 license:** 9017

**Test date:** Feb-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        450.soplex: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

CPU2006 license: 9017

Test date: Feb-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -D\_FILE\_OFFSET\_BITS=64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

**CPU2006 license:** 9017

**Test date:** Feb-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

## Peak Optimization Flags (Continued)

```
450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
             -prof-use(pass 2) -opt-malloc-options=3
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
             -prof-use(pass 2) -unroll14 -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
             -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
              -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
              -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
              -prof-use(pass 2) -opt-prefetch -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

**CPU2006 license:** 9017

**Test date:** Feb-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Apr 6 10:44:41 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 April 2016.