



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 736

PowerEdge FC430 (Intel Xeon E5-2650L v4, 1.70 GHz)

SPECfp_rate_base2006 = 717

CPU2006 license: 55


Test date: Jan-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Sep-2015

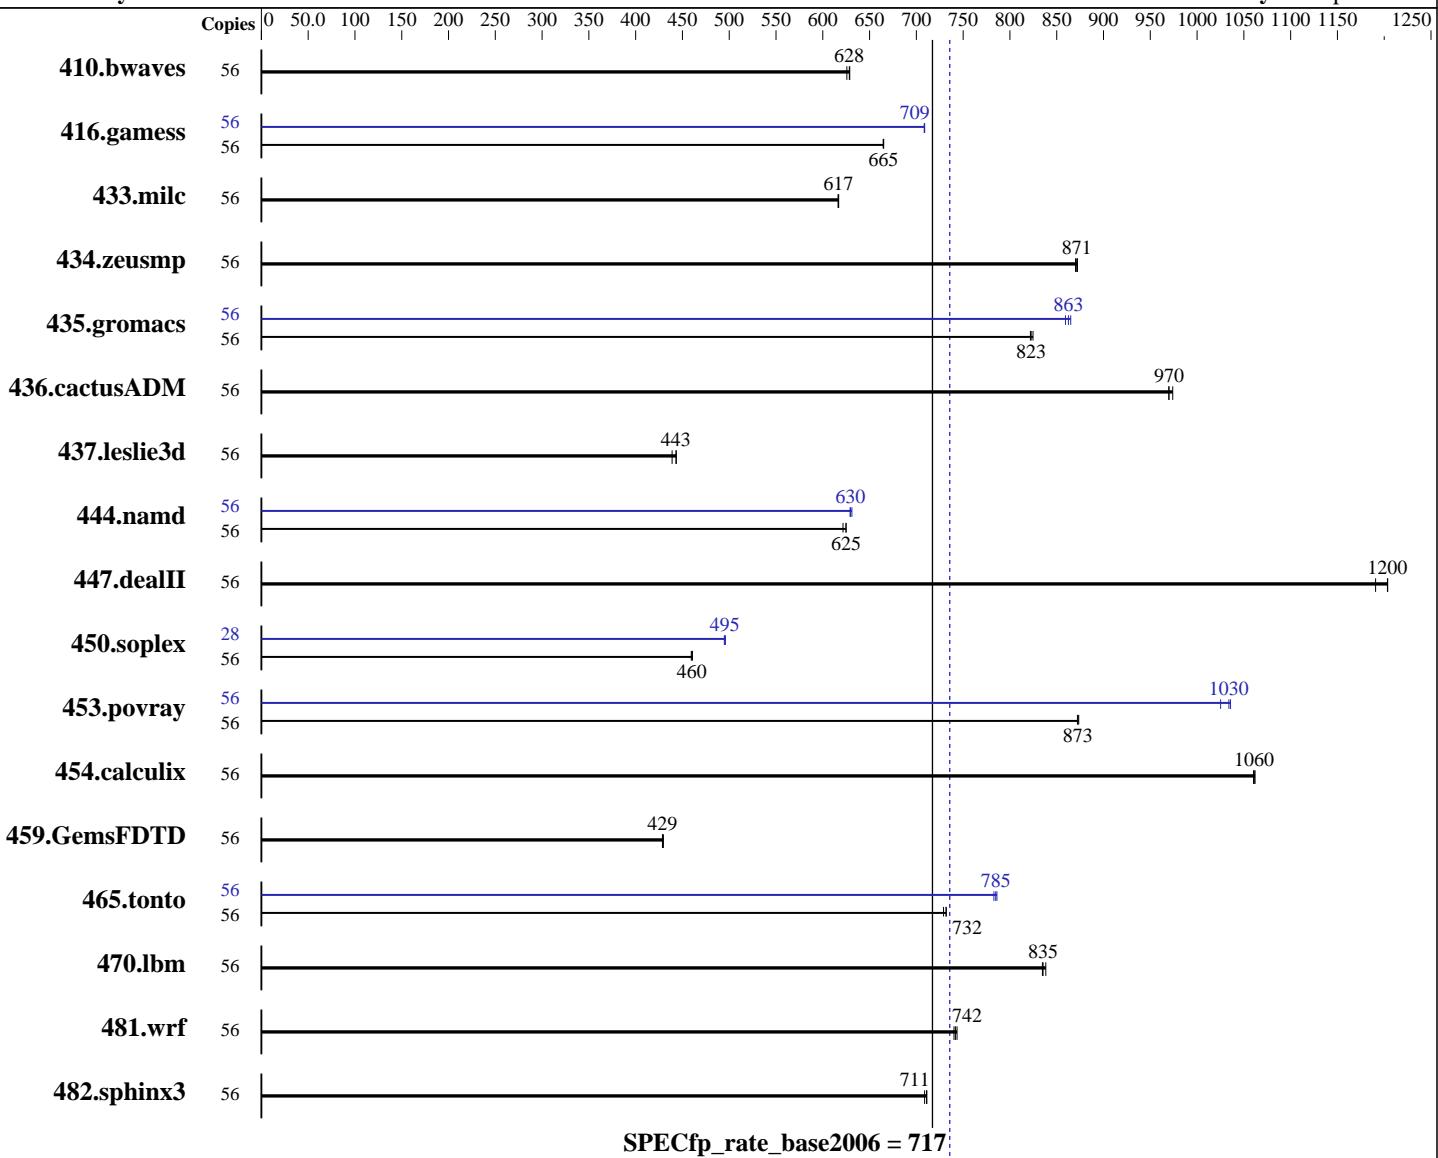

SPECfp_rate_base2006 = 717

SPECfp_rate2006 = 736

Hardware

CPU Name: Intel Xeon E5-2650L v4
CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz: 1700
FPU: Integrated
CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable: 2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
Compiler: 3.10.0-229.el7.x86_64
C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 736

PowerEdge FC430 (Intel Xeon E5-2650L v4, 1.70 GHz)

SPECfp_rate_base2006 = 717

CPU2006 license: 55

Test date: Jan-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Sep-2015

L3 Cache: 35 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 240 GB SATA SSD
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1210	629	<u>1211</u>	<u>628</u>	1216	626	56	1210	629	<u>1211</u>	<u>628</u>	1216	626
416.gamess	56	1650	665	1649	665	<u>1649</u>	<u>665</u>	56	<u>1547</u>	<u>709</u>	1548	708	<u>1547</u>	<u>709</u>
433.milc	56	834	616	<u>834</u>	<u>617</u>	833	617	56	834	616	<u>834</u>	<u>617</u>	833	617
434.zeusmp	56	<u>585</u>	<u>871</u>	586	870	584	872	56	<u>585</u>	<u>871</u>	586	870	584	872
435.gromacs	56	<u>486</u>	<u>823</u>	485	825	486	822	56	462	865	465	859	<u>464</u>	<u>863</u>
436.cactusADM	56	687	974	<u>690</u>	<u>970</u>	690	970	56	687	974	<u>690</u>	<u>970</u>	690	970
437.leslie3d	56	1199	439	1187	443	<u>1188</u>	<u>443</u>	56	1199	439	1187	443	<u>1188</u>	<u>443</u>
444.namd	56	<u>719</u>	<u>625</u>	719	625	723	622	56	712	631	714	629	<u>713</u>	<u>630</u>
447.dealII	56	<u>532</u>	<u>1200</u>	538	1190	532	1200	56	<u>532</u>	<u>1200</u>	538	1190	532	1200
450.soplex	56	1014	461	<u>1015</u>	<u>460</u>	1017	459	28	<u>471</u>	<u>496</u>	472	495	<u>471</u>	<u>495</u>
453.povray	56	342	872	<u>341</u>	<u>873</u>	341	873	56	291	1030	<u>288</u>	<u>1030</u>	288	1040
454.calculix	56	<u>435</u>	<u>1060</u>	436	1060	435	1060	56	<u>435</u>	<u>1060</u>	436	1060	435	1060
459.GemsFDTD	56	<u>1386</u>	<u>429</u>	1386	429	1383	430	56	<u>1386</u>	<u>429</u>	1386	429	1383	430
465.tonto	56	<u>753</u>	<u>732</u>	753	732	756	729	56	701	786	<u>702</u>	<u>785</u>	704	783
470.lbm	56	918	838	<u>921</u>	<u>835</u>	922	835	56	918	838	<u>921</u>	<u>835</u>	922	835
481.wrf	56	<u>843</u>	<u>742</u>	845	740	841	743	56	<u>843</u>	<u>742</u>	845	740	841	743
482.sphinx3	56	1535	711	<u>1535</u>	<u>711</u>	1540	709	56	<u>1535</u>	<u>711</u>	<u>1535</u>	<u>711</u>	1540	709

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Snoop Mode set to Cluster on Die

Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 736

PowerEdge FC430 (Intel Xeon E5-2650L v4, 1.70 GHz)

SPECfp_rate_base2006 = 717

CPU2006 license: 55

Test date: Jan-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Sep-2015

Platform Notes (Continued)

```
System Profile set to Performance
Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Jan 22 07:55:33 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650L v4@ 1.70GHz
        2 "physical id"s (chips)
        56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 14
        siblings : 28
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

```
From /proc/meminfo
MemTotal:      264042644 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.1 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.1"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 21 17:04
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used   Avail Use% Mounted on
/dev/sda2        xfs   234G  7.9G  227G   4% /
Additional information from dmidecode:
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC430 (Intel Xeon E5-2650L v4, 1.70 GHz)

SPECfp_rate2006 = 736

SPECfp_rate_base2006 = 717

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jan-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.7.12 12/23/2015

Memory:

8x 00CE00B300CE M393A4K40BB1-CRC 32 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 736

PowerEdge FC430 (Intel Xeon E5-2650L v4, 1.70 GHz)

SPECfp_rate_base2006 = 717

CPU2006 license: 55

Test date: Jan-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Sep-2015

Base Portability Flags (Continued)

```
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
450.soplex: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC430 (Intel Xeon E5-2650L v4, 1.70 GHz)

SPECfp_rate2006 = 736

SPECfp_rate_base2006 = 717

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jan-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
    450.soplex: -D_FILE_OFFSET_BITS=64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
    -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
    -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -fno-alias -auto-ilp32
447.dealII: basepeak = yes
450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
    -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
    -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -opt-malloc-options=3
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
    -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
    -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -unroll14 -ansi-alias
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC430 (Intel Xeon E5-2650L v4, 1.70 GHz)

SPECfp_rate2006 = 736

SPECfp_rate_base2006 = 717

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jan-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 736

PowerEdge FC430 (Intel Xeon E5-2650L v4, 1.70 GHz)

SPECfp_rate_base2006 = 717

CPU2006 license: 55

Test date: Jan-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Sep-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Apr 5 14:54:55 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 April 2016.