



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®_rate2006 = 359

Express5800/R120g-1M (Intel Xeon E5-2603 v4)

SPECfp_rate_base2006 = 352

CPU2006 license: 9006


Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

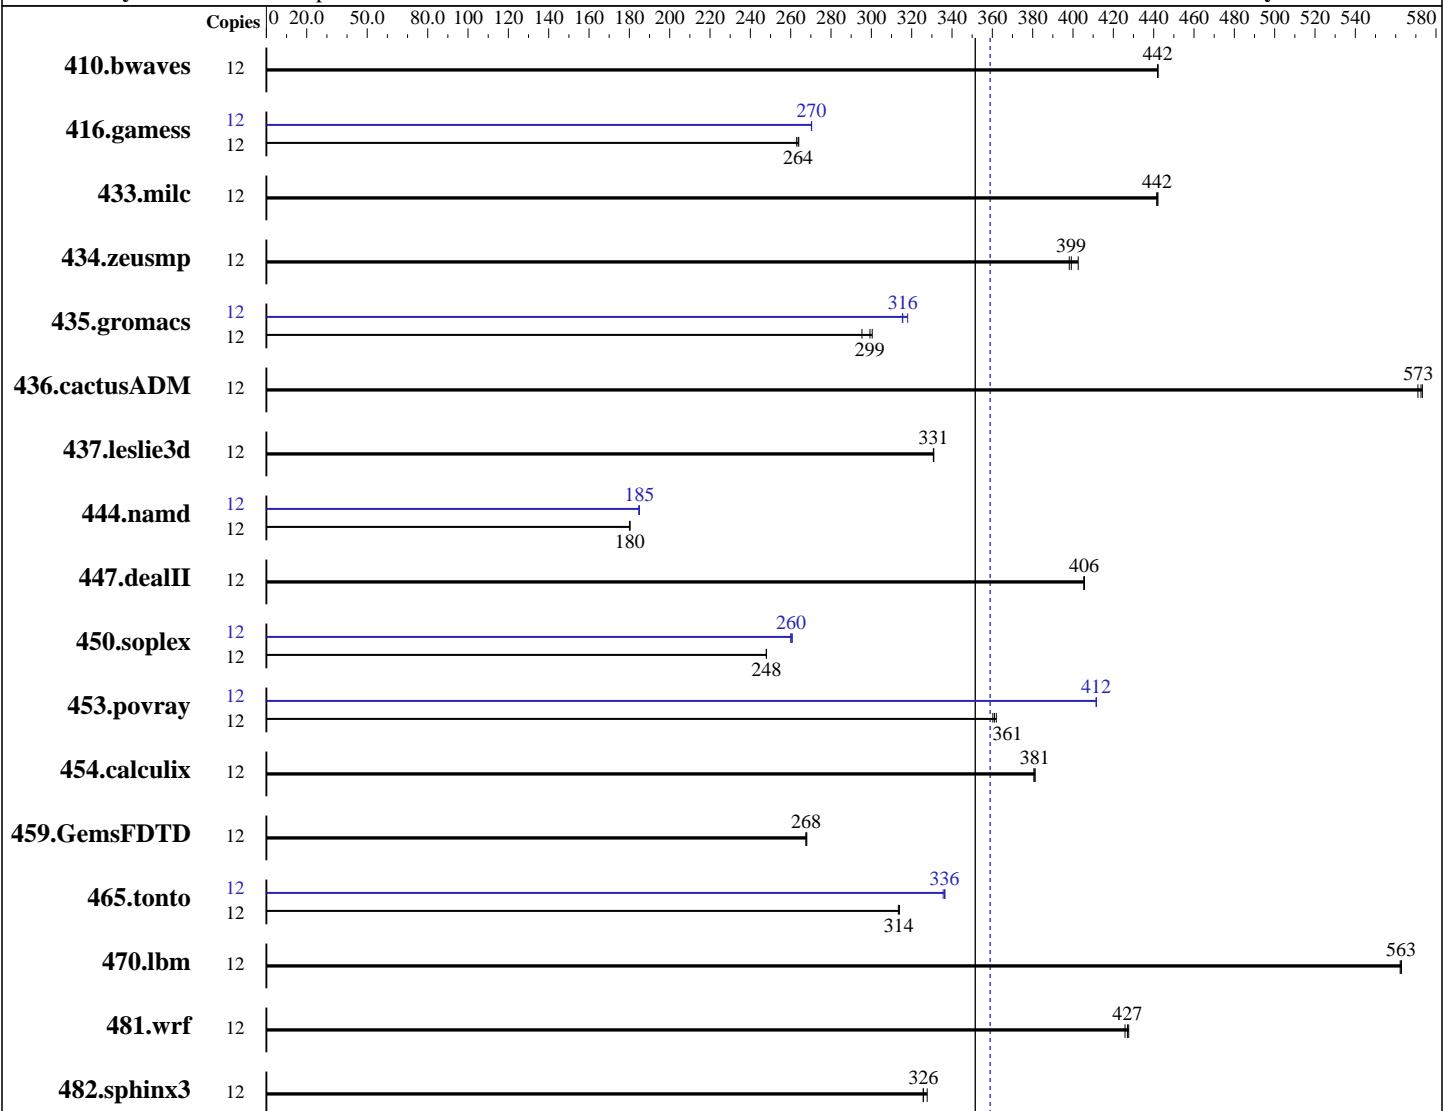

SPECfp_rate_base2006 = 352

SPECfp_rate2006 = 359

Hardware

CPU Name: Intel Xeon E5-2603 v4
 CPU Characteristics:
 CPU MHz: 1700
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Compiler: Kernel 3.10.0-327.4.5.el7.x86_64
 C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-1M (Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 359

CPU2006 license: 9006

Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	369	442	<u>369</u>	<u>442</u>	369	442	12	369	442	<u>369</u>	<u>442</u>	369	442	369	442
416.gamess	12	890	264	<u>891</u>	<u>264</u>	894	263	12	<u>869</u>	<u>270</u>	869	270	869	270	869	270
433.milc	12	250	441	249	442	<u>249</u>	<u>442</u>	12	250	441	249	442	<u>249</u>	<u>442</u>	249	442
434.zeusmp	12	271	403	274	398	<u>274</u>	<u>399</u>	12	271	403	274	398	<u>274</u>	<u>399</u>	274	399
435.gromacs	12	<u>286</u>	<u>299</u>	285	300	290	295	12	<u>272</u>	<u>316</u>	272	315	269	318	269	318
436.cactusADM	12	251	571	250	573	<u>250</u>	<u>573</u>	12	251	571	250	573	<u>250</u>	<u>573</u>	250	573
437.leslie3d	12	341	331	<u>341</u>	<u>331</u>	341	331	12	341	331	<u>341</u>	<u>331</u>	341	331	341	331
444.namd	12	534	180	534	180	<u>534</u>	<u>180</u>	12	521	185	520	185	<u>520</u>	<u>185</u>	520	185
447.dealII	12	338	406	339	405	<u>338</u>	<u>406</u>	12	338	406	339	405	<u>338</u>	<u>406</u>	338	406
450.soplex	12	<u>404</u>	<u>248</u>	404	248	404	248	12	384	261	385	260	<u>384</u>	<u>260</u>	384	260
453.povray	12	<u>177</u>	<u>361</u>	176	362	177	360	12	155	412	<u>155</u>	<u>412</u>	155	412	155	412
454.calculix	12	260	381	260	381	<u>260</u>	<u>381</u>	12	260	381	260	381	<u>260</u>	<u>381</u>	260	381
459.GemsFDTD	12	475	268	476	268	<u>476</u>	<u>268</u>	12	475	268	476	268	<u>476</u>	<u>268</u>	476	268
465.tonto	12	376	314	377	313	<u>376</u>	<u>314</u>	12	352	336	351	337	<u>351</u>	<u>336</u>	351	336
470.lbm	12	<u>293</u>	<u>563</u>	293	562	293	563	12	<u>293</u>	<u>563</u>	293	562	293	563	293	563
481.wrf	12	<u>314</u>	<u>427</u>	313	428	315	426	12	<u>314</u>	<u>427</u>	313	428	315	426	315	426
482.sphinx3	12	<u>718</u>	<u>326</u>	718	326	714	328	12	<u>718</u>	<u>326</u>	718	326	714	328	714	328

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Power Management Policy: Custom

Energy Performance: Performance

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-1M (Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 359

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2016

Hardware Availability: Apr-2016

Software Availability: Jan-2016

SPECfp_rate_base2006 = 352

Platform Notes (Continued)

Patrol Scrub: Disabled

Snoop Mode: Home Snoop with Directory

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

The Express5800/R120g-1M (Intel Xeon E5-2603 v4) and the Express5800/R120g-2M (Intel Xeon E5-2603 v4) models are electronically equivalent. The results have been measured on the Express5800/R120g-2M (Intel Xeon E5-2603 v4) model.

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-1M (Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 359

SPECfp_rate_base2006 = 352

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2016

Hardware Availability: Apr-2016

Software Availability: Jan-2016

Base Portability Flags (Continued)

```
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-1M (Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 359

CPU2006 license: 9006

Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -D_FILE_OFFSET_BITS=64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
    -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
    -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -fno-alias -auto-ilp32
447.dealII: basepeak = yes
450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
    -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
    -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -opt-malloc-options=3
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
    -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
    -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -unroll14 -ansi-alias
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-1M (Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 359

SPECfp_rate_base2006 = 352

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2016

Hardware Availability: Apr-2016

Software Availability: Jan-2016

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevB.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-1M (Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 359

SPECfp_rate_base2006 = 352

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2016

Hardware Availability: Apr-2016

Software Availability: Jan-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jun 30 13:13:28 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2016.