



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120g-1E (Intel Xeon E5-2603 v4)

**SPECfp®\_rate2006 = 358**

**SPECfp\_rate\_base2006 = 351**

**CPU2006 license:** 9006


**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Jan-2016

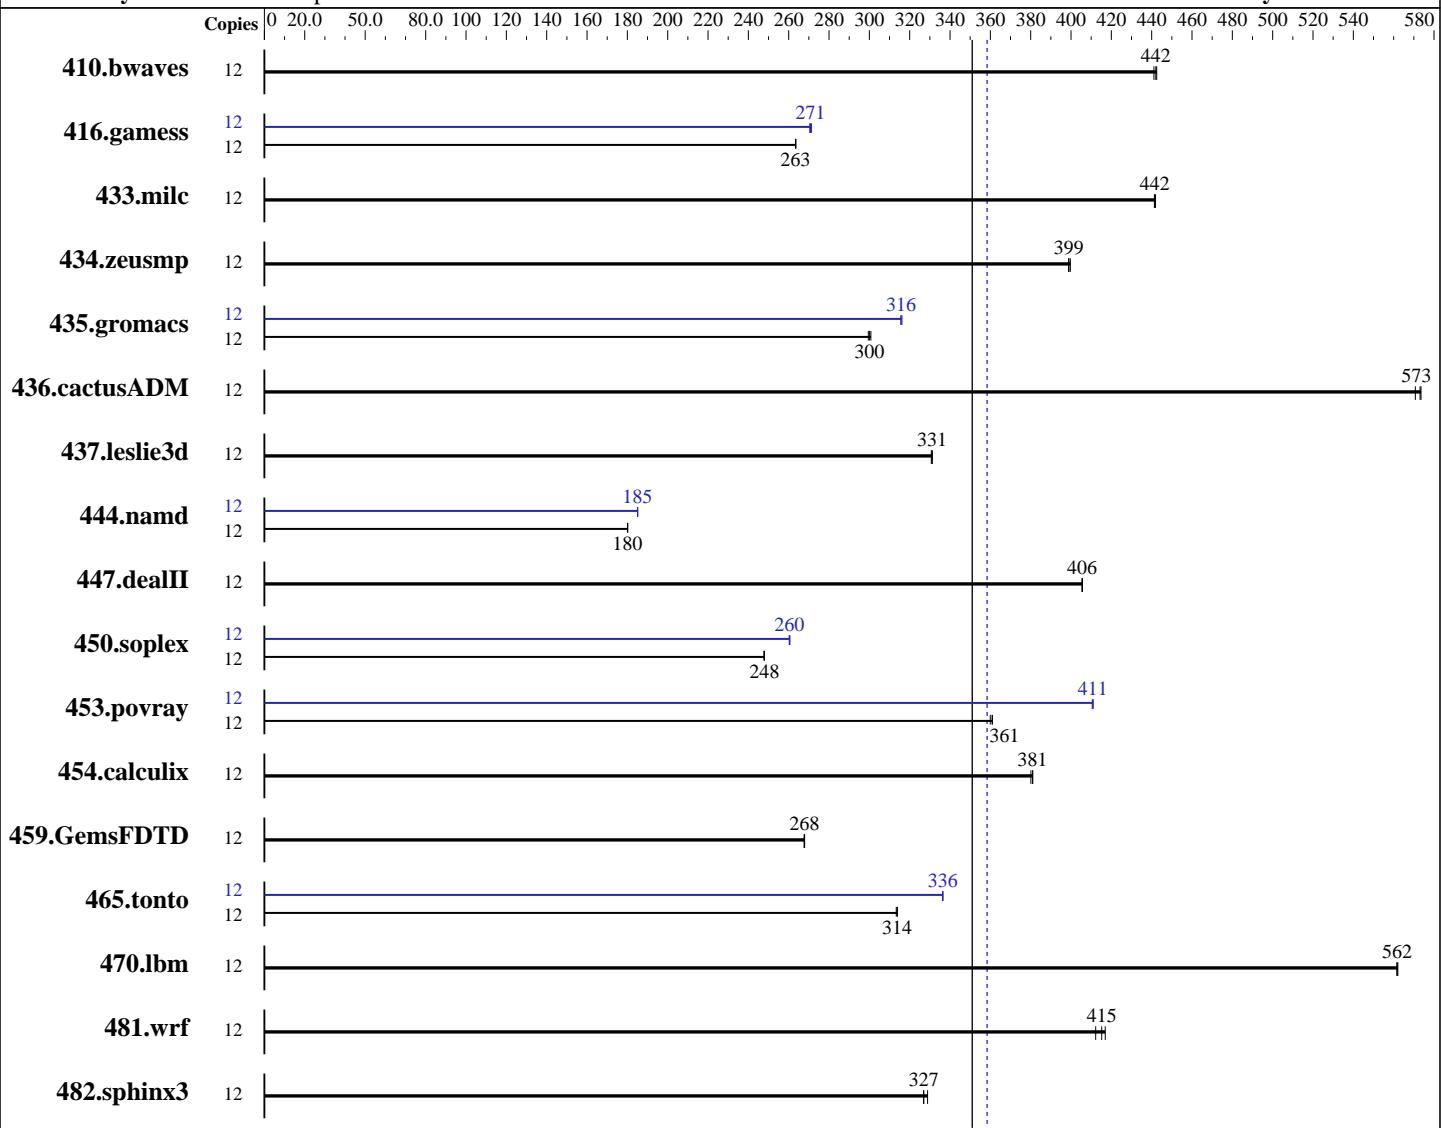

**SPECfp\_rate\_base2006 = 351**

**SPECfp\_rate2006 = 358**

## Hardware

CPU Name: Intel Xeon E5-2603 v4  
 CPU Characteristics:  
 CPU MHz: 1700  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

## Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 Compiler: Kernel 3.10.0-327.4.5.el7.x86\_64  
 C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-1E (Intel Xeon E5-2603 v4)

**SPECfp\_rate2006 = 358**

**SPECfp\_rate\_base2006 = 351**

**CPU2006 license:** 9006      **Test date:** May-2016  
**Test sponsor:** NEC Corporation      **Hardware Availability:** Jun-2016  
**Tested by:** NEC Corporation      **Software Availability:** Jan-2016

L3 Cache:	15 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other Cache:	None	Base Pointers:	32/64-bit
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)	Peak Pointers:	32/64-bit
Disk Subsystem:	1 x 1 TB SATA, 7200 RPM	Other Software:	None
Other Hardware:	None		

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	369	443	370	441	<u>369</u>	<u>442</u>	12	369	443	370	441	<u>369</u>	<u>442</u>		
416.gamess	12	892	263	891	264	<u>892</u>	<u>263</u>	12	<u>868</u>	<u>271</u>	869	270	866	271		
433.milc	12	<u>249</u>	<u>442</u>	249	442	250	441	12	<u>249</u>	<u>442</u>	249	442	250	441		
434.zeusmp	12	<u>274</u>	<u>399</u>	274	399	273	400	12	<u>274</u>	<u>399</u>	274	399	273	400		
435.gromacs	12	285	301	286	299	<u>285</u>	<u>300</u>	12	<u>271</u>	<u>316</u>	271	316	271	316		
436.cactusADM	12	251	571	250	574	<u>250</u>	<u>573</u>	12	<u>251</u>	<u>571</u>	250	574	<u>250</u>	<u>573</u>		
437.leslie3d	12	<u>341</u>	<u>331</u>	341	331	341	331	12	<u>341</u>	<u>331</u>	341	331	341	331		
444.namd	12	534	180	534	180	<u>534</u>	<u>180</u>	12	520	185	<u>520</u>	<u>185</u>	520	185		
447.dealII	12	338	406	339	405	<u>339</u>	<u>406</u>	12	338	406	339	405	<u>339</u>	<u>406</u>		
450.soplex	12	404	248	404	248	<u>404</u>	<u>248</u>	12	<u>384</u>	<u>260</u>	384	261	385	260		
453.povray	12	<u>177</u>	<u>361</u>	177	361	177	360	12	156	411	155	411	<u>155</u>	<u>411</u>		
454.calculix	12	<u>260</u>	<u>381</u>	260	380	260	381	12	<u>260</u>	<u>381</u>	260	380	260	381		
459.GemsFDTD	12	476	268	<u>475</u>	<u>268</u>	475	268	12	476	268	<u>475</u>	<u>268</u>	475	268		
465.tonto	12	<u>376</u>	<u>314</u>	376	314	377	313	12	<u>351</u>	<u>336</u>	351	336	351	336		
470.lbm	12	<u>294</u>	<u>562</u>	294	562	293	562	12	<u>294</u>	<u>562</u>	294	562	293	562		
481.wrf	12	321	417	<u>323</u>	<u>415</u>	325	412	12	321	417	<u>323</u>	<u>415</u>	325	412		
482.sphinx3	12	711	329	<u>715</u>	<u>327</u>	715	327	12	711	329	<u>715</u>	<u>327</u>	715	327		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Power Management Policy: Custom

Energy Performance: Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-1E (Intel Xeon E5-2603 v4)

**SPECfp\_rate2006 = 358**

**SPECfp\_rate\_base2006 = 351**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Jan-2016

## Platform Notes (Continued)

Patrol Scrub: Disabled

Snoop Mode: Home Snoop with Directory

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-1E (Intel Xeon E5-2603 v4)

**SPECfp\_rate2006 = 358**

**SPECfp\_rate\_base2006 = 351**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Jan-2016

## Base Portability Flags (Continued)

```
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
```

```
416.gamess: -DSPEC_CPU_LP64
```

```
433.milc: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120g-1E (Intel Xeon E5-2603 v4)

**SPECfp\_rate2006 = 358**

**SPECfp\_rate\_base2006 = 351**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Jan-2016

## Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
            -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-1E (Intel Xeon E5-2603 v4)

**SPECfp\_rate2006 = 358**

**SPECfp\_rate\_base2006 = 351**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Jan-2016

## Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jun 30 14:05:34 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 June 2016.