



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.10 GHz, Intel Xeon E7-8870 v4)

SPECint®\_rate2006 = 3150

SPECint\_rate\_base2006 = 3030

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

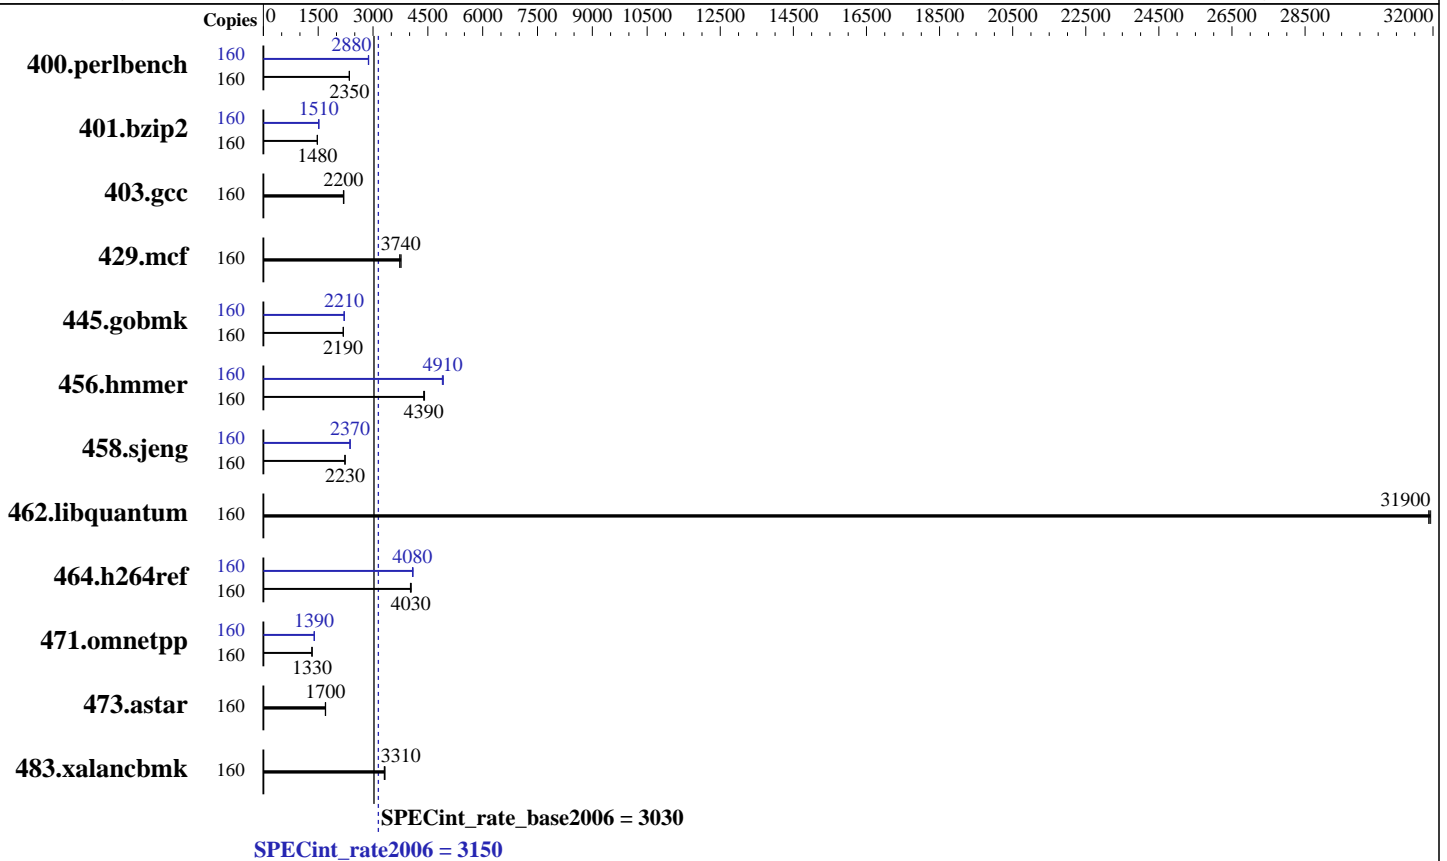

## Hardware

CPU Name: Intel Xeon E7-8870 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 80 cores, 4 chips, 20 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 50 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R, running at 1600 MHz)  
 Disk Subsystem: 1 x 800 GB NVMe PCIe SSD, RAID 0  
 Other Hardware: DL580 Gen9 NVMe SSD Express Bay Enablement Kit

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP1, Kernel 3.12.49-11-default  
 Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.10 GHz, Intel Xeon E7-8870 v4)

SPECint\_rate2006 = 3150

SPECint\_rate\_base2006 = 3030

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	160	<b>664</b>	<b>2350</b>	663	2360	666	2350	160	544	2870	543	2880	<b>543</b>	<b>2880</b>
401.bzip2	160	1045	1480	1047	1470	<b>1045</b>	<b>1480</b>	160	<b>1019</b>	<b>1510</b>	1021	1510	1017	1520
403.gcc	160	585	2200	588	2190	<b>587</b>	<b>2200</b>	160	585	2200	588	2190	<b>587</b>	<b>2200</b>
429.mcf	160	387	3770	391	3730	<b>390</b>	<b>3740</b>	160	387	3770	391	3730	<b>390</b>	<b>3740</b>
445.gobmk	160	<b>767</b>	<b>2190</b>	767	2190	768	2190	160	758	2210	<b>759</b>	<b>2210</b>	759	2210
456.hammer	160	339	4410	340	4390	<b>340</b>	<b>4390</b>	160	<b>304</b>	<b>4910</b>	305	4900	303	4920
458.sjeng	160	867	2230	867	2230	<b>867</b>	<b>2230</b>	160	<b>816</b>	<b>2370</b>	817	2370	816	2370
462.libquantum	160	104	31900	104	31900	<b>104</b>	<b>31900</b>	160	104	31900	104	31900	<b>104</b>	<b>31900</b>
464.h264ref	160	<b>878</b>	<b>4030</b>	876	4040	880	4020	160	868	4080	864	4100	<b>868</b>	<b>4080</b>
471.omnetpp	160	751	1330	<b>752</b>	<b>1330</b>	752	1330	160	717	1400	<b>719</b>	<b>1390</b>	719	1390
473.astar	160	<b>662</b>	<b>1700</b>	662	1700	659	1700	160	<b>662</b>	<b>1700</b>	662	1700	659	1700
483.xalancbmk	160	<b>333</b>	<b>3310</b>	334	3310	332	3330	160	<b>333</b>	<b>3310</b>	334	3310	332	3330

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Custom  
HP Power Regulator to HP Static High Performance Mode  
Minimum Processor Idle Power Core C-State set to C6 State  
Minimum Processor Idle Power Package C-State set to No Package State  
QPI Snoop Configuration set to Cluster On Die  
Collaborative Power Control set to Disabled  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled

Sysinfo program /home/intel\_binary/cpu2006/config/sysinfo.rev6914  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9  
(2.10 GHz, Intel Xeon E7-8870 v4)

SPECint\_rate2006 = 3150

SPECint\_rate\_base2006 = 3030

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-vi0i Mon Jun 13 10:28:51 2016

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E7-8870 v4 @ 2.10GHz
 4 "physical id"s (chips)
160 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 20
  siblings  : 40
  physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
  physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
  physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
  physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size : 25600 KB
```

From /proc/meminfo

```
MemTotal:      529307316 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

uname -a:

```
Linux linux-vi0i 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 10 14:13

SPEC is set to: /home/intel\_binary/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
Continued on next page
```



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.10 GHz, Intel Xeon E7-8870 v4)

SPECint\_rate2006 = 3150

SPECint\_rate\_base2006 = 3030

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

/dev/nvme0n1p4 xfs 703G 35G 668G 5% /home  
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U17 05/16/2016

Memory:

64x UNKNOWN NOT AVAILABLE

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1600 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as: 32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1600 MHz

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/intel\_binary/cpu2006/libs/32:/home/intel\_binary/cpu2006/libs/64:/home/intel\_binary/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.10 GHz, Intel Xeon E7-8870 v4)

SPECint\_rate2006 = 3150

SPECint\_rate\_base2006 = 3030

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Base Portability Flags (Continued)

473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.10 GHz, Intel Xeon E7-8870 v4)

SPECint\_rate2006 = 3150

SPECint\_rate\_base2006 = 3030

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Peak Portability Flags (Continued)

445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
 456.hmmr: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
 458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
 462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
 471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
 473.astar: -D\_FILE\_OFFSET\_BITS=64  
 483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
 -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
 -opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.10 GHz, Intel Xeon E7-8870 v4)

SPECint\_rate2006 = 3150

SPECint\_rate\_base2006 = 3030

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Peak Optimization Flags (Continued)

471.omnetpp (continued):

`-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap`

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 12 11:03:32 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 July 2016.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 7