



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 670

PowerEdge T430 (Intel Xeon E5-2630 v4, 2.20 GHz)

SPECfp_rate_base2006 = 655

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

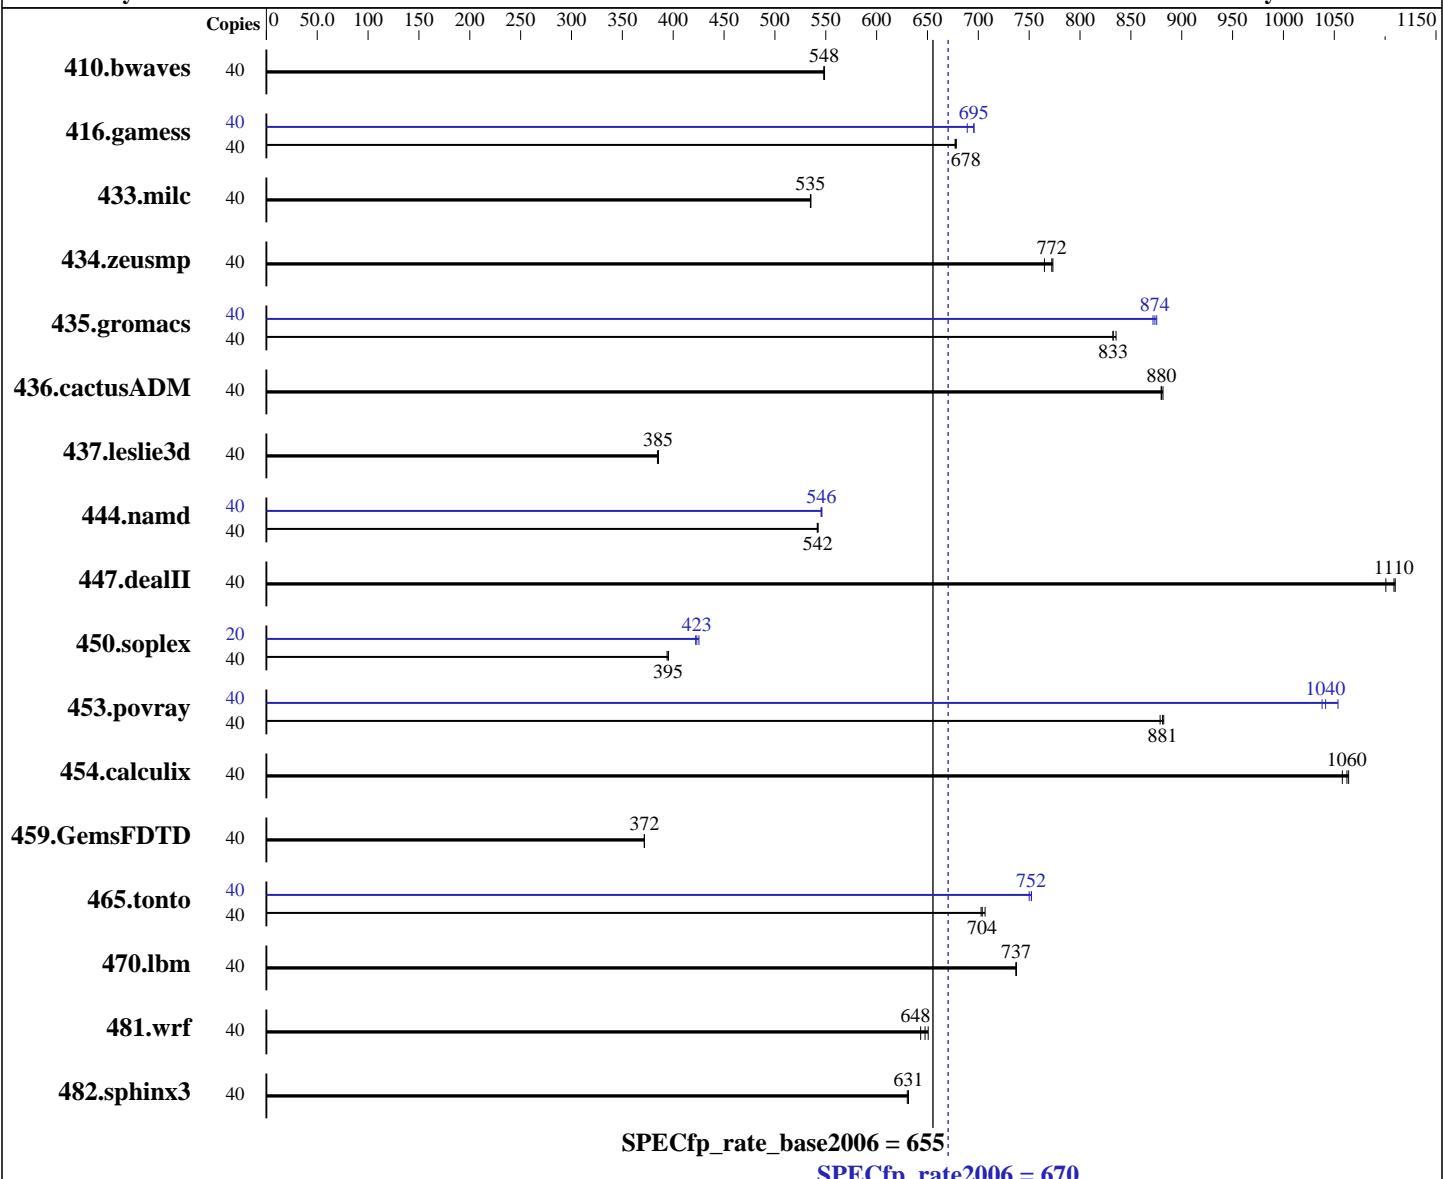

SPECfp_rate_base2006 = 655

SPECfp_rate2006 = 670

Hardware

CPU Name: Intel Xeon E5-2630 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 670

PowerEdge T430 (Intel Xeon E5-2630 v4, 2.20 GHz)

SPECfp_rate_base2006 = 655

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx8 PC4-2400T-R, running at 2133 MHz)
 Disk Subsystem: 1 x 250 GB 7200 RPM SATA HDD
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	991	549	992	548	<u>991</u>	<u>548</u>	40	991	549	992	548	<u>991</u>	<u>548</u>		
416.gamess	40	1155	678	<u>1156</u>	<u>678</u>	1157	677	40	1126	696	1137	689	<u>1126</u>	<u>695</u>		
433.milc	40	686	535	<u>686</u>	<u>535</u>	686	535	40	686	535	<u>686</u>	<u>535</u>	686	535		
434.zeusmp	40	471	773	476	765	<u>471</u>	<u>772</u>	40	471	773	476	765	<u>471</u>	<u>772</u>		
435.gromacs	40	343	832	<u>343</u>	<u>833</u>	342	835	40	326	875	328	872	<u>327</u>	<u>874</u>		
436.cactusADM	40	543	880	542	882	<u>543</u>	<u>880</u>	40	543	880	542	882	<u>543</u>	<u>880</u>		
437.leslie3d	40	975	385	978	384	<u>976</u>	<u>385</u>	40	975	385	978	384	<u>976</u>	<u>385</u>		
444.namd	40	<u>592</u>	<u>542</u>	592	542	591	542	40	<u>588</u>	<u>546</u>	587	546	588	545		
447.dealII	40	412	1110	<u>413</u>	<u>1110</u>	416	1100	40	412	1110	<u>413</u>	<u>1110</u>	416	1100		
450.soplex	40	844	395	<u>844</u>	<u>395</u>	847	394	20	395	422	392	425	<u>394</u>	<u>423</u>		
453.povray	40	<u>242</u>	<u>881</u>	241	882	242	879	40	202	1050	<u>204</u>	<u>1040</u>	205	1040		
454.calculix	40	<u>311</u>	<u>1060</u>	312	1060	310	1060	40	<u>311</u>	<u>1060</u>	312	1060	310	1060		
459.GemsFDTD	40	1142	372	1142	372	<u>1142</u>	<u>372</u>	40	1142	372	1142	372	<u>1142</u>	<u>372</u>		
465.tonto	40	560	703	557	707	<u>559</u>	<u>704</u>	40	523	752	<u>523</u>	<u>752</u>	525	750		
470.lbm	40	746	737	<u>745</u>	<u>737</u>	745	737	40	746	737	<u>745</u>	<u>737</u>	745	737		
481.wrf	40	<u>690</u>	<u>648</u>	695	643	687	651	40	<u>690</u>	<u>648</u>	695	643	687	651		
482.sphinx3	40	1235	631	1237	630	<u>1235</u>	<u>631</u>	40	1235	631	1237	630	<u>1235</u>	<u>631</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Snoop Mode set to Cluster on Die

Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 670

PowerEdge T430 (Intel Xeon E5-2630 v4, 2.20 GHz)

SPECfp_rate_base2006 = 655

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Platform Notes (Continued)

System Profile set to custom

CPU Power Management set to Hardware P States

C States set to Autonomous

C1E disabled

Energy Efficient Turbo disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Balanced Performance

Memory Patrol Scrub disabled

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-iiq8 Fri May 27 21:35:33 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2630 v4 @ 2.20GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      132054328 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T430 (Intel Xeon E5-2630 v4, 2.20 GHz)

SPECfp_rate2006 = 670

SPECfp_rate_base2006 = 655

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Platform Notes (Continued)

CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

```
Linux linux-iiq8 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 27 09:30

SPEC is set to: /root/cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	221G	8.6G	212G	4%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.0.1 04/11/2016

Memory:

4x 00AD063200AD HMA82GR7MFR8N-UH	16 GB	2 rank	2400 MHz	configured at 2133
MHz				
4x 00CE00B300CE M393A2K43BB1-CRC	16 GB	2 rank	2400 MHz	configured at 2133
MHz				
4x Not Specified	Not Specified			

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T430 (Intel Xeon E5-2630 v4, 2.20 GHz)

SPECfp_rate2006 = 670

SPECfp_rate_base2006 = 655

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T430 (Intel Xeon E5-2630 v4, 2.20 GHz)

SPECfp_rate2006 = 670

SPECfp_rate_base2006 = 655

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T430 (Intel Xeon E5-2630 v4, 2.20 GHz)

SPECfp_rate2006 = 670

SPECfp_rate_base2006 = 655

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 670

PowerEdge T430 (Intel Xeon E5-2630 v4, 2.20 GHz)

SPECfp_rate_base2006 = 655

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 9 17:03:56 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 August 2016.