



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

Synergy 480 Gen9
(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp®_rate2006 = 362

SPECfp_rate_base2006 = 355

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

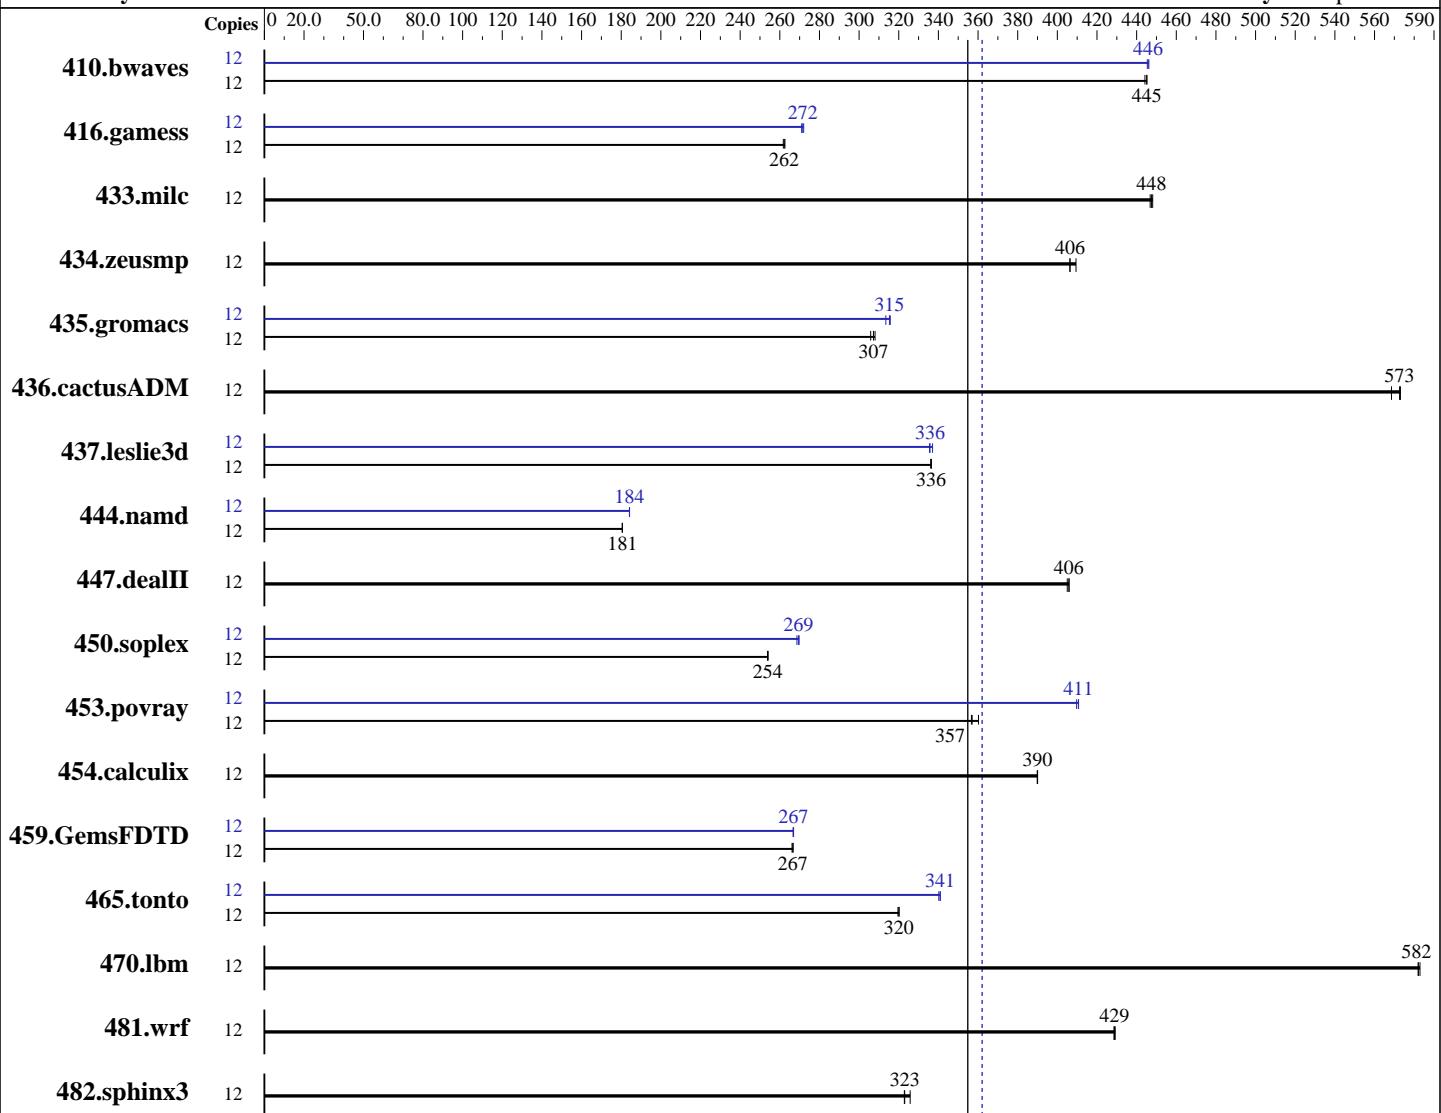

SPECfp_rate_base2006 = 355

SPECfp_rate2006 = 362

Hardware

CPU Name: Intel Xeon E5-2603 v4
CPU Characteristics:
CPU MHz: 1700
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1
Kernel 3.12.49-11-default
Compiler: C/C++: Version 17.0.0.098 of Intel C++ Studio XE for Linux;
Fortran: Version 17.0.0.098 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

Synergy 480 Gen9
(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 362

SPECfp_rate_base2006 = 355

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R,
running at 1866 MHz)
Disk Subsystem: 1 x 600 GB 10 K SAS, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	366	445	367	444	366	445	12	366	446	366	446	366	445
416.gamess	12	895	263	896	262	898	262	12	865	272	864	272	867	271
433.milc	12	246	448	247	447	246	448	12	246	448	247	447	246	448
434.zeusmp	12	269	406	267	409	269	406	12	269	406	267	409	269	406
435.gromacs	12	280	306	278	308	279	307	12	272	315	271	316	273	313
436.cactusADM	12	252	569	250	573	250	573	12	252	569	250	573	250	573
437.leslie3d	12	336	336	335	336	335	336	12	336	336	335	337	336	336
444.namd	12	533	181	533	181	533	181	12	523	184	522	184	523	184
447.dealII	12	338	406	338	406	339	405	12	338	406	338	406	339	405
450.soplex	12	394	254	394	254	394	254	12	373	269	371	270	372	269
453.povray	12	179	357	179	357	177	360	12	156	410	155	411	155	411
454.calculix	12	254	390	254	390	254	390	12	254	390	254	390	254	390
459.GemsFDTD	12	478	267	478	266	477	267	12	477	267	477	267	477	267
465.tonto	12	369	320	369	320	369	320	12	346	341	346	341	347	340
470.lbm	12	283	583	283	582	283	582	12	283	583	283	582	283	582
481.wrf	12	312	429	313	429	313	429	12	312	429	313	429	313	429
482.sphinx3	12	724	323	724	323	718	326	12	724	323	724	323	718	326

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 362

SPECfp_rate_base2006 = 355

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

Platform Notes

BIOS Configuration:

```
Power Profile set to Custom
Power Regulator to Static High Performance Mode
Minimum Processor Idle Power Core C-State set to C6 State
Minimum Processor Idle Power Package C-State set to No Package State
Energy/Performance Bias set to Maximum Performance
Collaborative Power Control set to Disabled
QPI Snoop Configuration set to Home Snoop
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh
```

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-8p7b Mon Oct 10 23:36:39 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 v4 @ 1.70GHz
        2 "physical id"s (chips)
        12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 6
        siblings : 6
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264549752 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 1
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
        VERSION="12-SP1"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 362

SPECfp_rate_base2006 = 355

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

Platform Notes (Continued)

```
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-8p7b 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 10 14:13
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda4        xfs   517G   26G   491G   5% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HP I37 09/14/2016
```

Memory:

```
8x UNKNOWN NOT AVAILABLE
16x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1866 MHz
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:
16x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1866 MHz

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 362

SPECfp_rate_base2006 = 355

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 362

SPECfp_rate_base2006 = 355

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-D_FILE_OFFSET_BITS=64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3: `-DSPEC_CPU_LP64`

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 362

SPECfp_rate_base2006 = 355

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -fno-alias -auto-ilp32
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -qopt-malloc-options=3
 -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll4 -auto -inline-calloc
 -qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
 -qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp_rate2006 = 362

SPECfp_rate_base2006 = 355

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>
<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 15 16:08:13 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 November 2016.