



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECint®2006 = 65.7**

Huawei XH620 V3 (Intel Xeon E5-2660 v4)

**SPECint\_base2006 = 63.2**

CPU2006 license: 3175


**Test date:** Nov-2016

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2016

**Tested by:** Huawei

**Software Availability:** Dec-2015

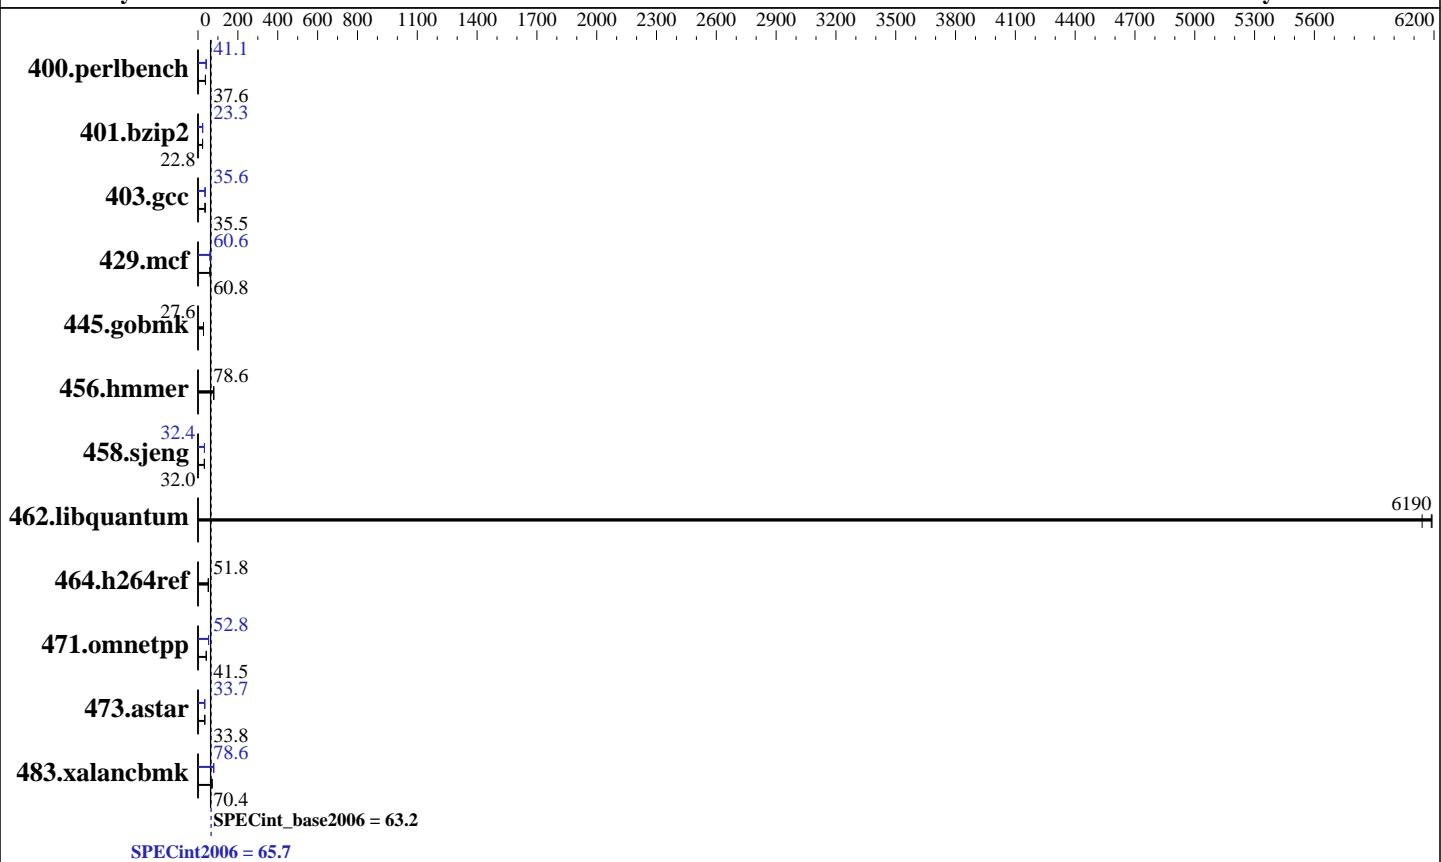

<b>Hardware</b>		<b>Software</b>
CPU Name:	Intel Xeon E5-2660 v4	Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64) 3.12.49-11-default
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz	Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
CPU MHz:	2000	Auto Parallel: Yes
FPU:	Integrated	File System: ext4
CPU(s) enabled:	28 cores, 2 chips, 14 cores/chip	System State: Run level 3 (multi-user)
CPU(s) orderable:	1,2 chip	Base Pointers: 32/64-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers: 32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software: Microquill SmartHeap V10.2
L3 Cache:	35 MB I+D on chip per chip	
Other Cache:	None	
Memory:	256 GB (16 x 16 GB 2Rx8 PC4-2400T-R)	
Disk Subsystem:	1 x 2000 GB SATA, 7200 RPM	
Other Hardware:	None	



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECint2006 = 65.7**

Huawei XH620 V3 (Intel Xeon E5-2660 v4)

**SPECint\_base2006 = 63.2**

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	259	37.7	<b>260</b>	<b>37.6</b>	264	37.0	238	41.1	<b>238</b>	<b>41.1</b>	238	41.0
401.bzip2	<b>423</b>	<b>22.8</b>	420	23.0	424	22.8	<b>415</b>	<b>23.3</b>	<b>415</b>	<b>23.3</b>	<b>415</b>	<b>23.3</b>
403.gcc	226	35.6	<b>227</b>	<b>35.5</b>	227	35.5	<b>226</b>	<b>35.6</b>	226	35.6	227	35.5
429.mcf	150	60.9	<b>150</b>	<b>60.8</b>	151	60.4	148	61.7	<b>150</b>	<b>60.6</b>	150	60.6
445.gobmk	<b>380</b>	<b>27.6</b>	381	27.5	380	27.6	<b>380</b>	<b>27.6</b>	381	27.5	380	27.6
456.hmmer	119	78.6	118	78.8	<b>119</b>	<b>78.6</b>	119	78.6	118	78.8	<b>119</b>	<b>78.6</b>
458.sjeng	378	32.0	<b>378</b>	<b>32.0</b>	378	32.0	374	32.4	373	32.4	<b>373</b>	<b>32.4</b>
462.libquantum	3.35	6190	3.37	6140	<b>3.35</b>	<b>6190</b>	3.35	6190	3.37	6140	<b>3.35</b>	<b>6190</b>
464.h264ref	<b>427</b>	<b>51.8</b>	425	52.0	427	51.8	<b>427</b>	<b>51.8</b>	425	52.0	427	51.8
471.omnetpp	148	42.1	151	41.4	<b>151</b>	<b>41.5</b>	118	52.8	118	52.9	<b>118</b>	<b>52.8</b>
473.astar	208	33.8	<b>208</b>	<b>33.8</b>	208	33.7	208	33.8	<b>208</b>	<b>33.7</b>	209	33.7
483.xalancbmk	100	68.9	<b>97.9</b>	<b>70.4</b>	97.9	70.5	<b>87.8</b>	<b>78.6</b>	87.8	78.6	87.6	78.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Set Snoop Mode to ES mode

Set Patrol Scrub to Disable

Set Hyper-Threading to Disable

Sysinfo program /spec16/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-29n0 Thu Nov 17 14:28:12 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2660 v4@ 2.00GHz
  2 "physical id"s (chips)
  28 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 65.7

Huawei XH620 V3 (Intel Xeon E5-2660 v4)

SPECint\_base2006 = 63.2

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

## Platform Notes (Continued)

```
caution.)
    cpu cores : 14
    siblings   : 14
    physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    cache size : 35840 KB

From /proc/meminfo
MemTotal:      264271944 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
Linux linux-29n0 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 17 04:06

SPEC is set to: /spec16
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1        ext4  1.8T  113G  1.7T   7% /
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 3.31 08/22/2016
Memory:
 16x Micron 18ASF2G72PDZ-2G3B1 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)
```



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECint2006 = 65.7**

Huawei XH620 V3 (Intel Xeon E5-2660 v4)

**SPECint\_base2006 = 63.2**

**CPU2006 license:** 3175

**Test date:** Nov-2016

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2016

**Tested by:** Huawei

**Software Availability:** Dec-2015

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/spec16/libs/32:/spec16/libs/64:/spec16/sh"

OMP\_NUM\_THREADS = "28"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Huawei XH622 V3 and Huawei XH628 V3 and Huawei XH620 V3 are electronically equivalent.

The results have been measured on a Huawei XH620 V3 model

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hammer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei XH620 V3 (Intel Xeon E5-2660 v4)

**SPECint2006 = 65.7**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -DSPEC\_CPU\_LP64

456.hmmr: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch

-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div

-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

-opt-prefetch -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECint2006 = 65.7**

Huawei XH620 V3 (Intel Xeon E5-2660 v4)

**SPECint\_base2006 = 63.2**

**CPU2006 license:** 3175

**Test date:** Nov-2016

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2016

**Tested by:** Huawei

**Software Availability:** Dec-2015

## Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel  
-opt-prefetch -auto-p32

445.gobmk: basepeak = yes

456.hammer: basepeak = yes

458sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 65.7

Huawei XH620 V3 (Intel Xeon E5-2660 v4)

SPECint\_base2006 = 63.2

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Dec 15 11:15:54 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 December 2016.