



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp®2006 = **106**

Lenovo System x3250 M6
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_base2006 = **104**

CPU2006 license: 9017


Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

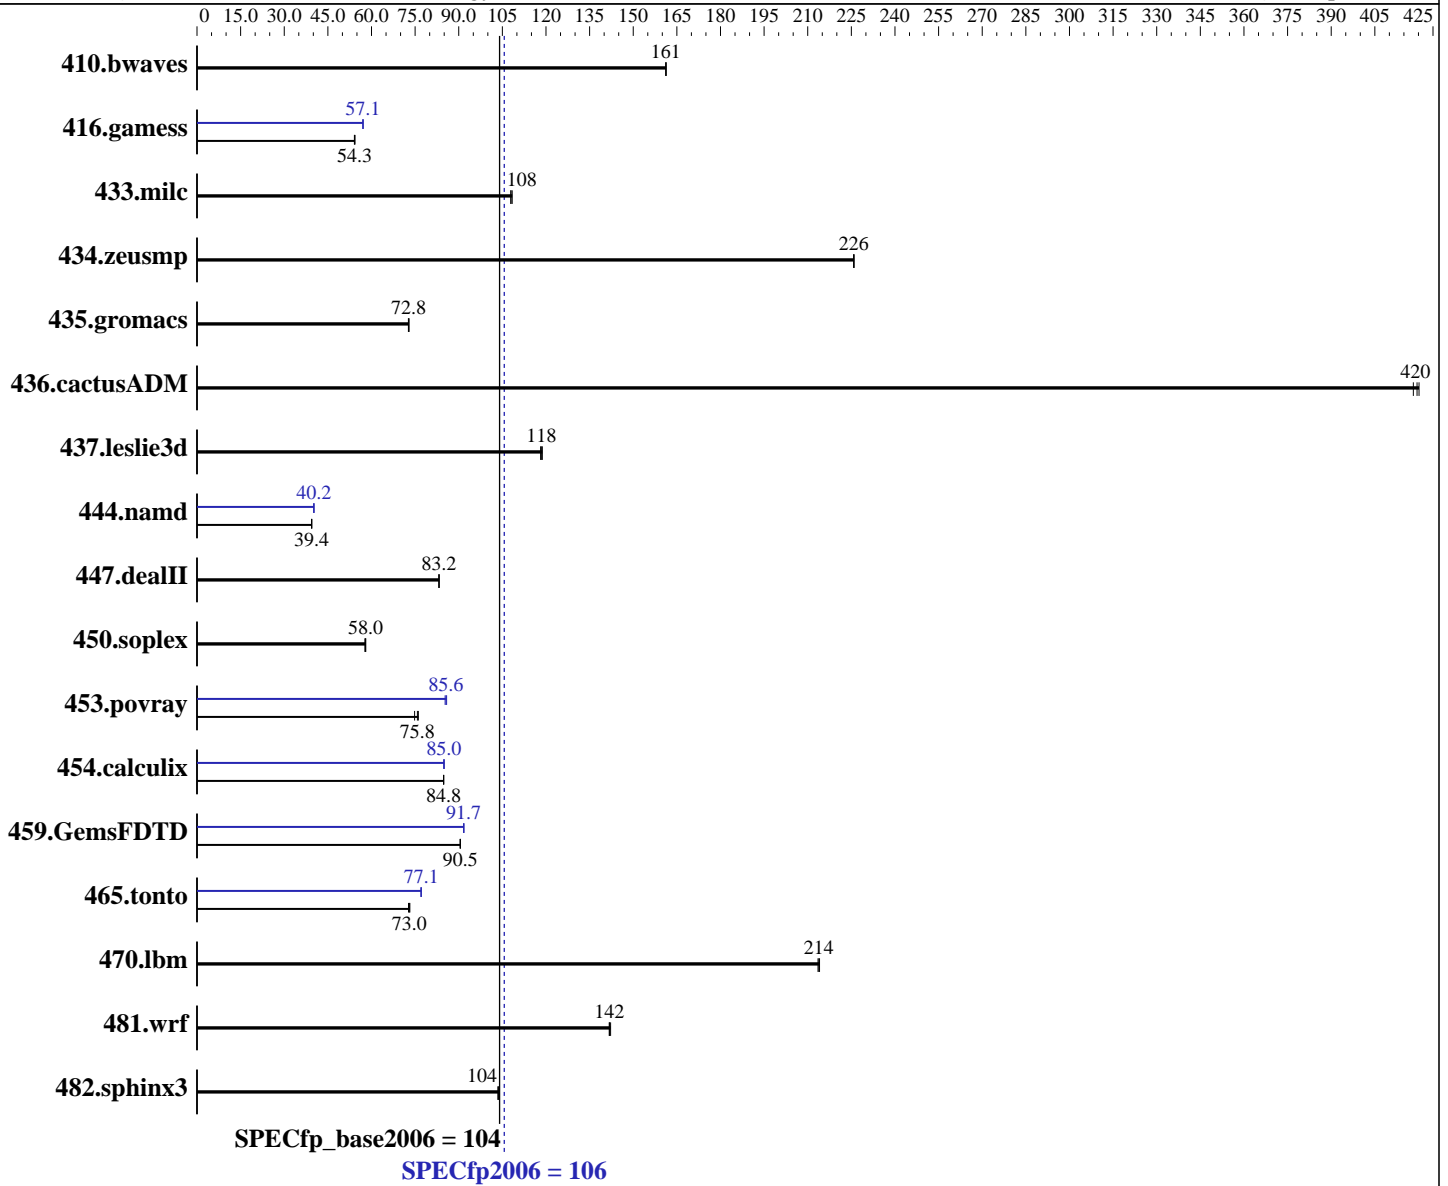

Hardware

CPU Name: Intel Xeon E3-1240 v6
 CPU Characteristics: Intel Turbo Boost Technology up to 4.10 GHz
 CPU MHz: 3700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 Kernel 3.10.0-514.el7.x86_64
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = **106**

Lenovo System x3250 M6
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_base2006 = **104**

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-U)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	84.3	161	84.2	161	84.3	161	84.3	161	84.2	161	84.3	161
416.gamess	362	54.1	361	54.3	361	54.3	343	57.1	343	57.1	343	57.1
433.milc	84.7	108	85.0	108	85.1	108	84.7	108	85.0	108	85.1	108
434.zeusmp	40.3	226	40.3	226	40.3	226	40.3	226	40.3	226	40.3	226
435.gromacs	97.9	72.9	98.2	72.7	98.1	72.8	97.9	72.9	98.2	72.7	98.1	72.8
436.cactusADM	28.6	418	28.4	420	28.5	420	28.6	418	28.4	420	28.5	420
437.leslie3d	79.2	119	79.4	118	79.6	118	79.2	119	79.4	118	79.6	118
444.namd	203	39.4	203	39.4	203	39.4	199	40.2	200	40.1	199	40.2
447.dealII	138	83.2	137	83.3	137	83.2	138	83.2	137	83.3	137	83.2
450.soplex	144	58.0	144	57.7	144	58.0	144	58.0	144	57.7	144	58.0
453.povray	69.9	76.1	71.1	74.8	70.2	75.8	62.1	85.6	62.0	85.8	62.4	85.3
454.calculix	97.3	84.8	97.3	84.8	97.3	84.8	97.1	85.0	97.2	84.9	97.1	85.0
459.GemsFDTD	117	90.6	117	90.5	117	90.5	116	91.7	116	91.7	116	91.8
465.tonto	135	73.0	134	73.2	135	72.7	128	77.0	128	77.1	128	77.1
470.lbm	64.2	214	64.3	214	64.3	214	64.2	214	64.3	214	64.3	214
481.wrf	78.8	142	78.5	142	78.8	142	78.8	142	78.5	142	78.8	142
482.sphinx3	187	104	188	104	188	103	187	104	188	104	188	103

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Intel Virtualization Technology set to Disable
Operating Mode set to Maximum Performance
Hyper-Threading set to Disable
Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on miaoli-01-rhel7.3 Tue Jul 25 15:51:02 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 106

Lenovo System x3250 M6
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_base2006 = 104

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1240 v6 @ 3.70GHz
 1 "physical id"s (chips)
 4 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings   : 4
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

From /proc/meminfo

```
MemTotal:      65932404 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

uname -a:

```
Linux miaoli-01-rhel7.3 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT
2016 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jul 25 11:55

SPEC is set to: /home/cpu2006-1.2-ic17.0u3

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   689G  5.0G  684G   1% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO -[M3E123AUS-2.10]- 06/15/2017

Memory:

```
4x Samsung M378A2K43BB1-CRC 16 GB 2 rank 2400 MHz
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 106

Lenovo System x3250 M6
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_base2006 = 104

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages disabled with:

echo never > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64 -nofor_main

459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 106

Lenovo System x3250 M6
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_base2006 = 104

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Peak Compiler Invocation

C benchmarks:
icc -m64
C++ benchmarks:
icpc -m64
Fortran benchmarks:
ifort -m64
Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 106

Lenovo System x3250 M6
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_base2006 = 104

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 106

Lenovo System x3250 M6
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_base2006 = 104

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-KBL-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-KBL-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Aug 23 13:37:53 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 August 2017.