



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.20 GHz, Intel Xeon Silver 4114)

SPECfp®_rate2006 = 832

SPECfp_rate_base2006 = 820

CPU2006 license: 9017


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jul-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

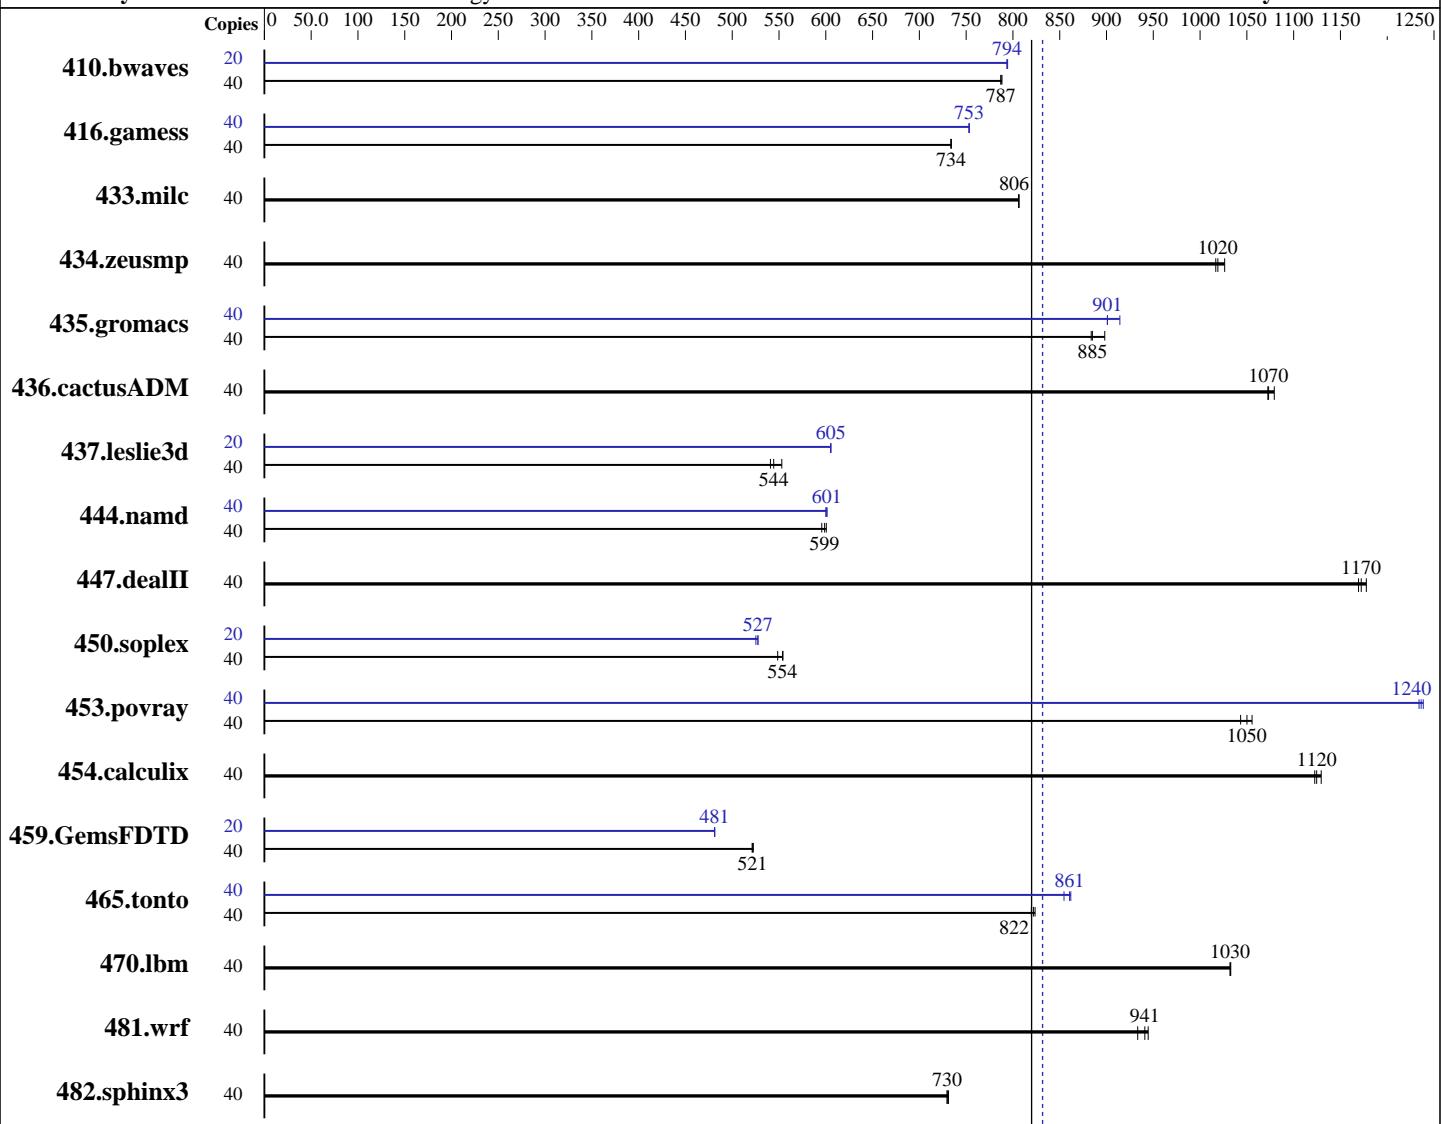

SPECfp_rate_base2006 = 820

SPECfp_rate2006 = 832

Hardware

CPU Name: Intel Xeon Silver 4114
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64)
Compiler: Kernel 4.4.21-69-default
C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.20 GHz, Intel Xeon Silver 4114)

SPECfp_rate2006 = 832

SPECfp_rate_base2006 = 820

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

L3 Cache: 13.75 MB I+D on chip per chip
Other Cache: None
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R, running at 2400 MHz)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	691	787	<u>691</u>	<u>787</u>	690	788	20	342	794	<u>342</u>	<u>794</u>	342	794
416.gamess	40	1067	734	<u>1067</u>	<u>734</u>	1067	734	40	1040	753	<u>1040</u>	<u>753</u>	1040	753
433.milc	40	456	806	455	806	<u>455</u>	<u>806</u>	40	456	806	455	806	<u>455</u>	<u>806</u>
434.zeusmp	40	<u>357</u>	<u>1020</u>	355	1030	358	1020	40	<u>357</u>	<u>1020</u>	355	1030	358	1020
435.gromacs	40	318	898	323	884	<u>323</u>	<u>885</u>	40	312	914	317	901	<u>317</u>	<u>901</u>
436.cactusADM	40	<u>445</u>	<u>1070</u>	443	1080	446	1070	40	<u>445</u>	<u>1070</u>	443	1080	446	1070
437.leslie3d	40	680	553	695	541	<u>691</u>	<u>544</u>	20	311	605	<u>311</u>	<u>605</u>	311	605
444.namd	40	534	601	539	596	<u>536</u>	<u>599</u>	40	535	600	<u>534</u>	<u>601</u>	533	601
447.dealII	40	391	1170	389	1180	<u>390</u>	<u>1170</u>	40	391	1170	389	1180	<u>390</u>	<u>1170</u>
450.soplex	40	<u>602</u>	<u>554</u>	602	554	608	549	20	316	528	<u>316</u>	<u>527</u>	318	525
453.povray	40	204	1040	202	1060	<u>203</u>	<u>1050</u>	40	<u>172</u>	<u>1240</u>	172	1240	172	1230
454.calculix	40	292	1130	<u>293</u>	<u>1120</u>	294	1120	40	292	1130	<u>293</u>	<u>1120</u>	294	1120
459.GemsFDTD	40	812	523	<u>814</u>	<u>521</u>	814	521	20	441	481	441	481	<u>441</u>	<u>481</u>
465.tonto	40	478	824	480	820	<u>479</u>	<u>822</u>	40	457	862	461	855	<u>457</u>	<u>861</u>
470.lbm	40	532	1030	<u>532</u>	<u>1030</u>	533	1030	40	532	1030	<u>532</u>	<u>1030</u>	533	1030
481.wrf	40	<u>475</u>	<u>941</u>	473	945	479	933	40	<u>475</u>	<u>941</u>	473	945	479	933
482.sphinx3	40	1066	731	1068	730	<u>1068</u>	<u>730</u>	40	1066	731	1068	730	<u>1068</u>	<u>730</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Execute Disable Bit set to Disable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.20 GHz, Intel Xeon Silver 4114)

SPECfp_rate2006 = 832

SPECfp_rate_base2006 = 820

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Platform Notes (Continued)

```
DCU Streamer Prefetcher set to Disable
Intel Virtualization Technology set to Disable
LLC dead line alloc set to Disable
Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on SN550-01 Tue Jul 25 16:00:03 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 10
        siblings : 20
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 14080 KB
```

```
From /proc/meminfo
MemTotal:      792245832 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux SN550-01 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 25 15:56
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.20 GHz, Intel Xeon Silver 4114)

SPECfp_rate2006 = 832

SPECfp_rate_base2006 = 820

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Platform Notes (Continued)

SPEC is set to: /home/cpu2006-1.2-ic17.0
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda4 xfs 689G 82G 608G 12% /home
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE109A-1.00]- 04/27/2017

Memory:

24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz, configured at 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.20 GHz, Intel Xeon Silver 4114)

SPECfp_rate2006 = 832

SPECfp_rate_base2006 = 820

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Base Portability Flags (Continued)

```
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.20 GHz, Intel Xeon Silver 4114)

SPECfp_rate2006 = 832

SPECfp_rate_base2006 = 820

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-malloc-options=3
-qopt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.20 GHz, Intel Xeon Silver 4114)

SPECfp_rate2006 = 832

SPECfp_rate_base2006 = 820

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll14 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll14 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.20 GHz, Intel Xeon Silver 4114)

SPECfp_rate2006 = 832

SPECfp_rate_base2006 = 820

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 4 12:40:08 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 October 2017.