



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL560 Gen10
(3.60 GHz, Intel Xeon Platinum 8156)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 1070

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

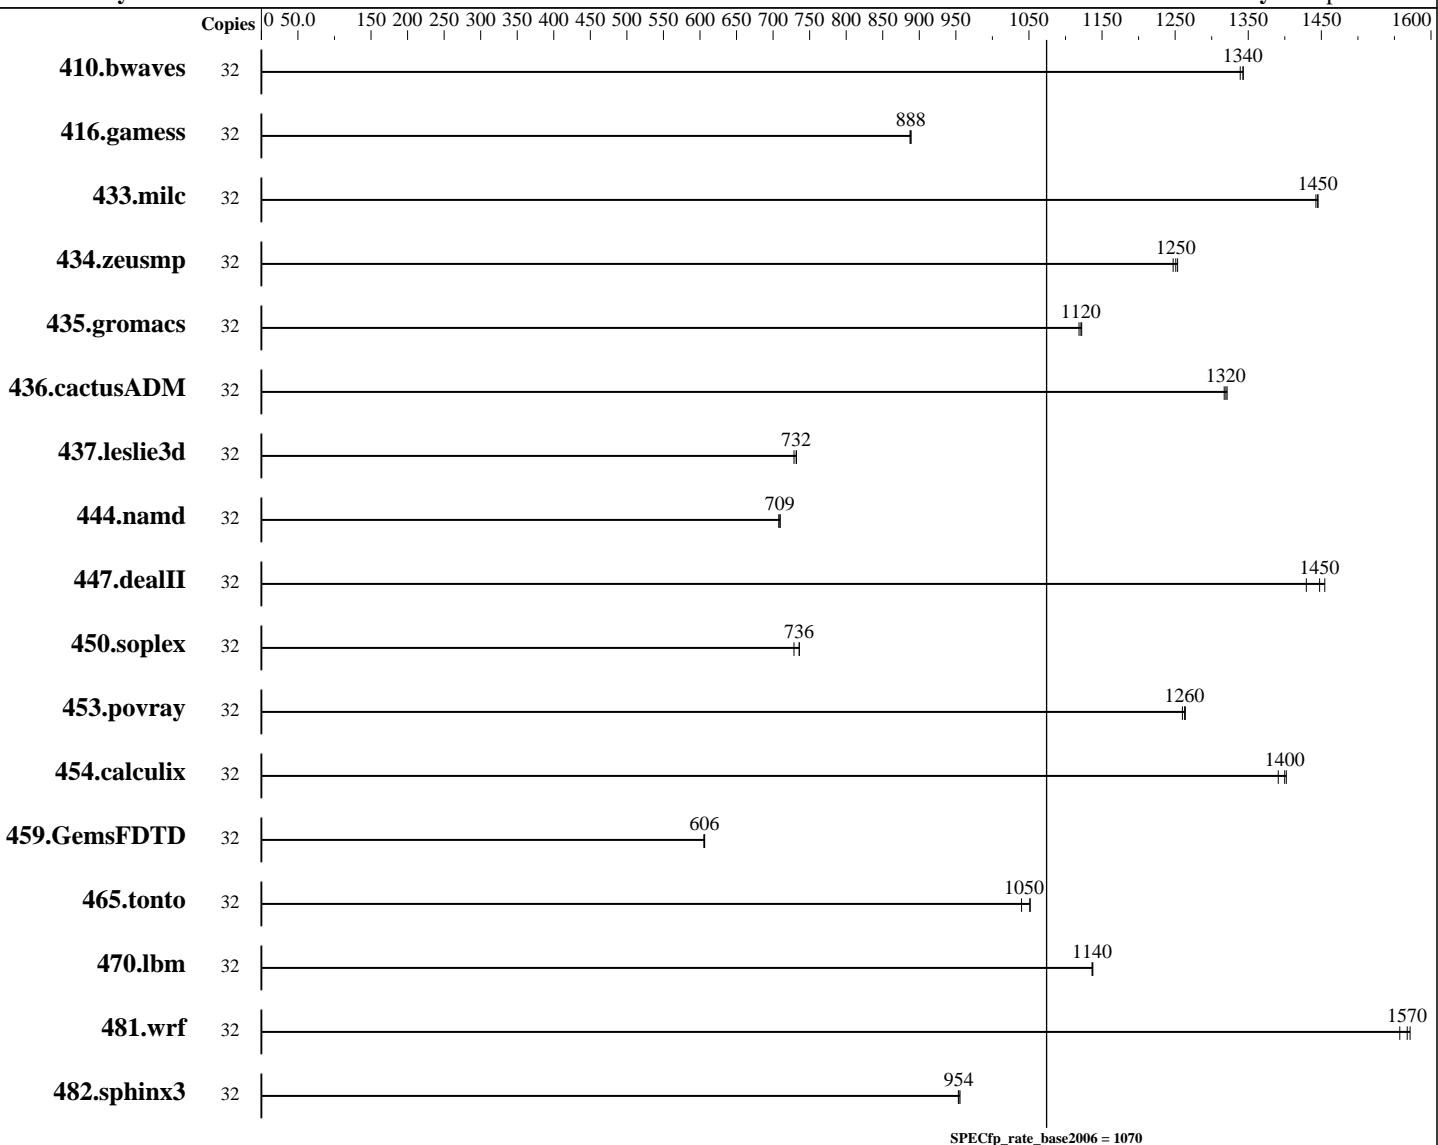

Hardware

CPU Name: Intel Xeon Platinum 8156
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 3600
FPU: Integrated
CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1, 2, 4 chip(s)
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP2
Compiler: Kernel 4.4.21-69-default
C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(3.60 GHz, Intel Xeon Platinum 8156)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1070

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

L3 Cache: 16.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
 Disk Subsystem: 2 x 480 GB SSD SATA, RAID 0
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: Not Applicable
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	325	1340	<u>324</u>	<u>1340</u>	324	1340							
416.gamess	32	705	889	706	887	<u>705</u>	<u>888</u>							
433.milc	32	204	1440	<u>203</u>	<u>1450</u>	203	1450							
434.zeusmp	32	233	1250	<u>233</u>	<u>1250</u>	232	1250							
435.gromacs	32	204	1120	204	1120	<u>204</u>	<u>1120</u>							
436.cactusADM	32	290	1320	289	1320	<u>290</u>	<u>1320</u>							
437.leslie3d	32	411	732	<u>411</u>	<u>732</u>	413	729							
444.namd	32	<u>362</u>	<u>709</u>	363	708	362	710							
447.dealII	32	252	1450	<u>253</u>	<u>1450</u>	256	1430							
450.soplex	32	363	736	366	729	<u>363</u>	<u>736</u>							
453.povray	32	135	1260	135	1260	<u>135</u>	<u>1260</u>							
454.calculix	32	190	1390	<u>189</u>	<u>1400</u>	188	1400							
459.GemsFDTD	32	560	606	<u>560</u>	<u>606</u>	561	605							
465.tonto	32	299	1050	<u>300</u>	<u>1050</u>	303	1040							
470.lbm	32	387	1140	<u>387</u>	<u>1140</u>	387	1140							
481.wrf	32	227	1570	230	1560	<u>228</u>	<u>1570</u>							
482.sphinx3	32	654	953	653	956	<u>654</u>	<u>954</u>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

irqbalance disabled with "service irqbalance stop"

tuned profile set with "tuned-adm profile throughput-performance"



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(3.60 GHz, Intel Xeon Platinum 8156)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1070

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
LLC Prefetcher set to Enabled
LLC Dead Line Allocation set to Disabled
Stale A to S set to Enabled
Workload Pofile set to General Throughput Compute
Minimum Processor Idle Power Core C-State set to C1E

Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-smfo Wed Oct 11 21:28:17 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8156 CPU @ 3.60GHz
4 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 8
physical 0: cores 1 5 9 13
physical 1: cores 1 2 5 11
physical 2: cores 1 5 9 13
physical 3: cores 1 2 5 11
cache size : 16896 KB

From /proc/meminfo
MemTotal: 792289328 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(3.60 GHz, Intel Xeon Platinum 8156)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1070

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Platform Notes (Continued)

```
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-smfo 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 11 17:11
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda4        xfs   852G   21G  831G   3% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HPE U34 09/29/2017
```

Memory:

```
48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(3.60 GHz, Intel Xeon Platinum 8156)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1070

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(3.60 GHz, Intel Xeon Platinum 8156)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1070

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 15 10:58:57 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 November 2017.