



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECint®2006 =

Not Run

SPECint_base2006 =

72.9

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

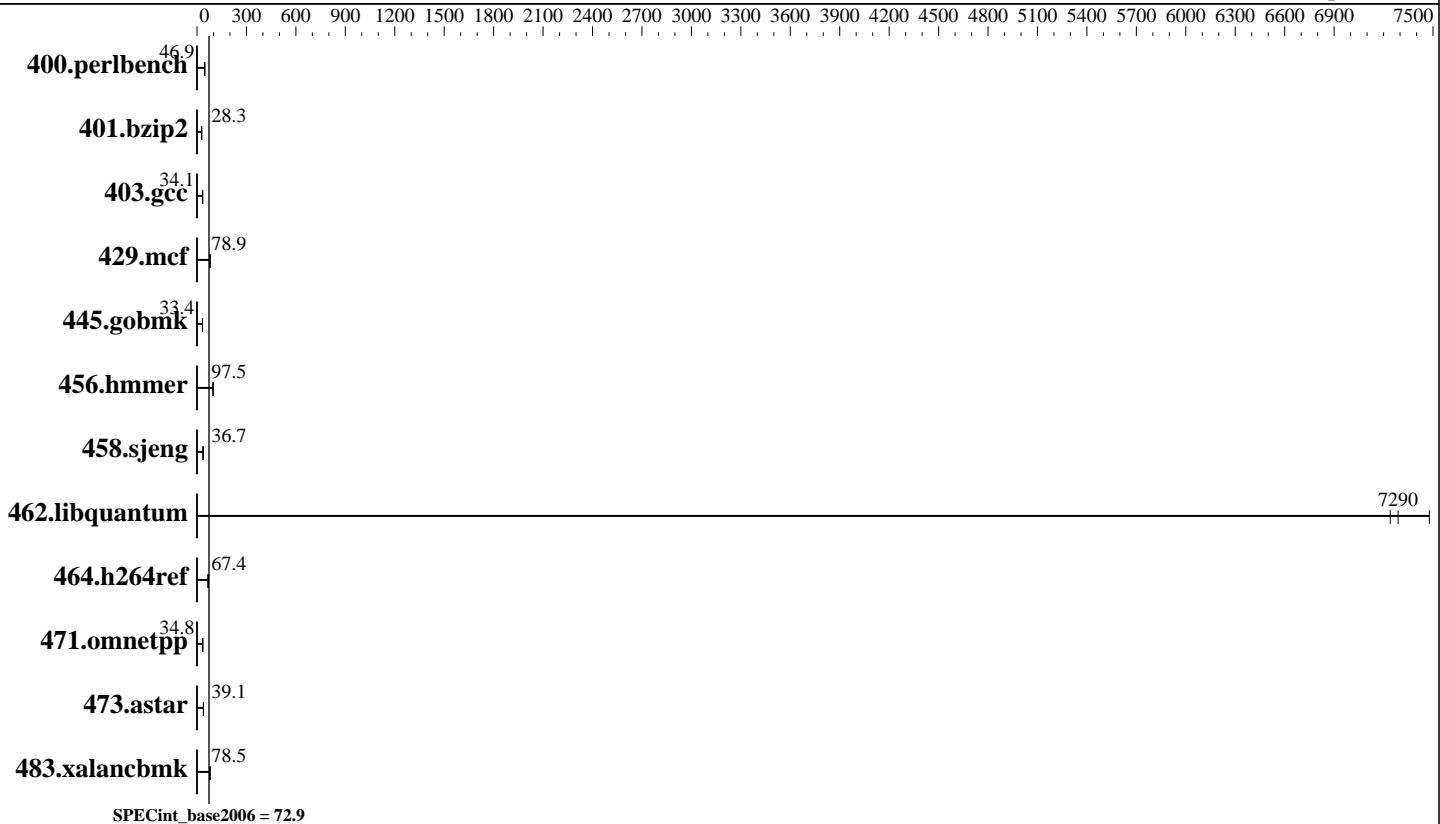

Hardware

CPU Name:	Intel Xeon Gold 6130
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	32 cores, 2 chips, 16 cores/chip
CPU(s) orderable:	1, 2 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	22 MB I+D on chip per chip
Other Cache:	None
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem:	1 x 960 GB SSD SATA, RAID 0
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP2
Compiler:	Kernel 4.4.21-69-default
	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	Not Applicable
Other Software:	Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECint2006 =

Not Run

SPECint_base2006 =

72.9

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	209	46.8	208	46.9	208	47.0						
401.bzip2	343	28.2	341	28.3	341	28.3						
403.gcc	236	34.1	236	34.1	236	34.1						
429.mcf	115	79.4	116	78.9	116	78.6						
445.gobmk	314	33.4	314	33.4	314	33.4						
456.hmmer	95.7	97.5	96.0	97.2	95.7	97.5						
458.sjeng	330	36.7	329	36.7	329	36.8						
462.libquantum	2.84	7290	2.77	7480	2.86	7240						
464.h264ref	328	67.4	327	67.6	328	67.4						
471.omnetpp	178	35.1	180	34.8	182	34.3						
473.astar	179	39.1	180	39.0	179	39.1						
483.xalancbmk	88.0	78.4	87.8	78.5	86.8	79.5						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetcher set to Enabled

LLC Dead Line Allocation set to Disabled

Stale A to S set to Disabled

Workload Pofile set to General Peak Frequency Compute

Energy/Performance Bias set to Maximum Performance

Uncore Frequency Scaling set to Auto

Workload Pofile set to Custom

NUMA Group Size Optimization set to Flat

Sysinfo program /home/cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-vjvuj Mon Oct 16 16:29:33 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECint2006 =

Not Run

SPECint_base2006 =

72.9

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 16
    siblings   : 16
    physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 22528 KB
```

```
From /proc/meminfo
MemTotal:      395929796 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-vjuj 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 16 16:27
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   852G   6.5G  846G   1% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECint2006 =

Not Run

SPECint_base2006 =

72.9

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

Oct-2017

Hardware Availability:

Oct-2017

Software Availability:

Apr-2017

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I42 09/27/2017

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

OMP_NUM_THREADS = "32"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -DSPEC_CPU_LP64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECint2006 =

Not Run

SPECint_base2006 =

72.9

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
-auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 15 10:59:13 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 November 2017.