



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(3.60 GHz, Intel Xeon Gold 5122)

**SPECfp®\_rate2006 = 1070**  
**SPECfp\_rate\_base2006 = 1050**

CPU2006 license: 9017


Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

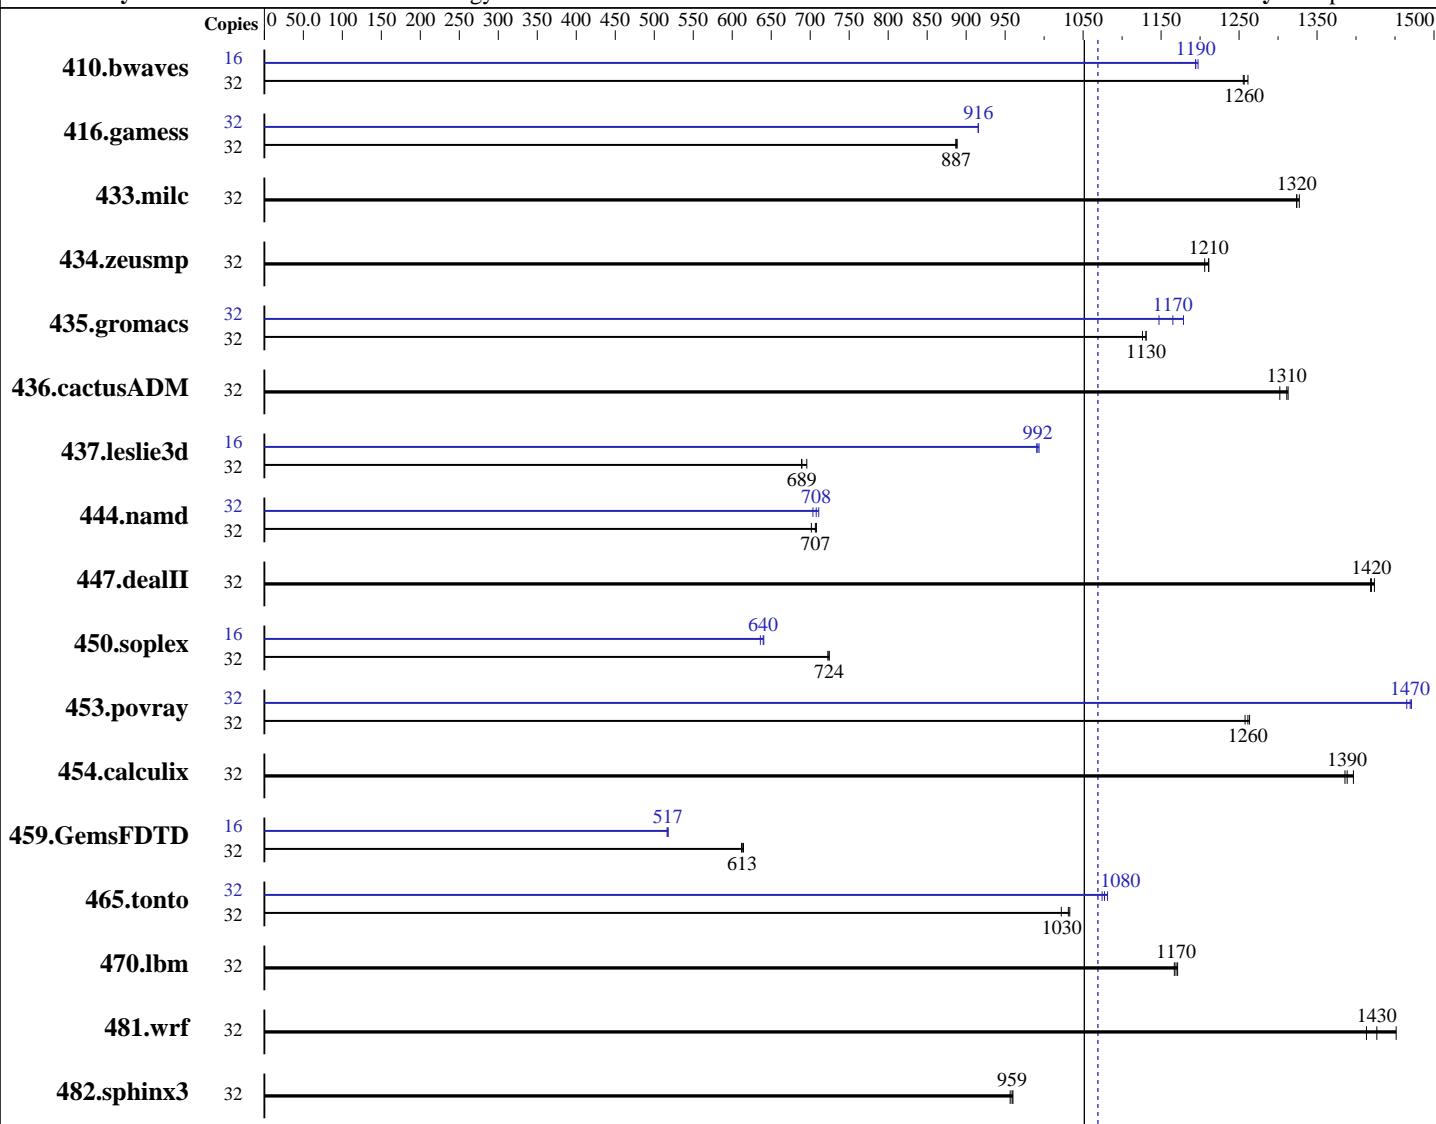

**SPECfp\_rate\_base2006 = 1050**

**SPECfp\_rate2006 = 1070**

### Hardware

CPU Name: Intel Xeon Gold 5122  
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
CPU MHz: 3600  
FPU: Integrated  
CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
Compiler: Kernel 4.4.21-69-default  
C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(3.60 GHz, Intel Xeon Gold 5122)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1050**

**CPU2006 license:** 9017

**Test date:** Sep-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

L3 Cache: 16.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
Disk Subsystem: 1 x 800 GB SAS SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	345	1260	346	1260	<b>346</b>	<b>1260</b>	16	182	1200	<b>182</b>	<b>1190</b>	182	1190
416.gamess	32	707	887	<b>706</b>	<b>887</b>	705	889	32	<b>684</b>	<b>916</b>	684	916	684	915
433.milc	32	<b>222</b>	<b>1320</b>	222	1320	221	1330	32	<b>222</b>	<b>1320</b>	222	1320	221	1330
434.zeusmp	32	240	1210	241	1210	<b>240</b>	<b>1210</b>	32	240	1210	241	1210	<b>240</b>	<b>1210</b>
435.gromacs	32	203	1130	202	1130	<b>202</b>	<b>1130</b>	32	194	1180	<b>196</b>	<b>1170</b>	199	1150
436.cactusADM	32	294	1300	<b>292</b>	<b>1310</b>	291	1310	32	294	1300	<b>292</b>	<b>1310</b>	291	1310
437.leslie3d	32	437	689	432	696	<b>436</b>	<b>689</b>	16	151	994	<b>152</b>	<b>992</b>	152	990
444.namd	32	366	701	<b>363</b>	<b>707</b>	362	708	32	365	704	<b>363</b>	<b>708</b>	361	711
447.dealII	32	258	1420	<b>258</b>	<b>1420</b>	257	1420	32	258	1420	<b>258</b>	<b>1420</b>	257	1420
450.soplex	32	368	724	<b>368</b>	<b>724</b>	369	723	16	208	640	210	636	<b>209</b>	<b>640</b>
453.povray	32	<b>135</b>	<b>1260</b>	135	1260	135	1260	32	116	1470	<b>116</b>	<b>1470</b>	116	1470
454.calculix	32	191	1390	189	1400	<b>190</b>	<b>1390</b>	32	191	1390	189	1400	<b>190</b>	<b>1390</b>
459.GemsFDTD	32	555	612	<b>554</b>	<b>613</b>	553	614	16	328	518	329	516	<b>328</b>	<b>517</b>
465.tonto	32	<b>305</b>	<b>1030</b>	305	1030	308	1020	32	<b>292</b>	<b>1080</b>	291	1080	293	1070
470.lbm	32	375	1170	377	1170	<b>376</b>	<b>1170</b>	32	375	1170	377	1170	<b>376</b>	<b>1170</b>
481.wrf	32	<b>251</b>	<b>1430</b>	253	1410	246	1450	32	<b>251</b>	<b>1430</b>	253	1410	246	1450
482.sphinx3	32	<b>650</b>	<b>959</b>	652	956	650	960	32	<b>650</b>	<b>959</b>	652	956	650	960

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:

Choose Operating Mode set to Maximum Performance  
Execute Disable Bit set to Disable

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(3.60 GHz, Intel Xeon Gold 5122)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1050**

**CPU2006 license:** 9017

**Test date:** Sep-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

## Platform Notes (Continued)

DCU Streamer Prefetcher set to Disable  
Intel Virtualization Technology set to Disable  
Stale AtoS set to Enable  
LLC dead line alloc set to Disable  
SNC set to Enable  
Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on Electron-node-02 Fri Sep 22 23:04:59 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5122 CPU @ 3.60GHz
        4 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings   : 8
physical 0: cores 1 2 5 11
physical 1: cores 1 5 9 13
physical 2: cores 1 10 11 12
physical 3: cores 2 3 4 10
cache size : 16896 KB
```

```
From /proc/meminfo
MemTotal:      1584975072 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux Electron-node-02 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(3.60 GHz, Intel Xeon Gold 5122)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1050**

**CPU2006 license:** 9017

**Test date:** Sep-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

## Platform Notes (Continued)

(9464f67) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Sep 22 15:16

SPEC is set to: /home/cpu2006-1.2-ic17.0u3  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda4 xfs 688G 116G 573G 17% /home  
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE113J-1.00]- 06/03/2017

Memory:

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(3.60 GHz, Intel Xeon Gold 5122)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1050**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Sep-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(3.60 GHz, Intel Xeon Gold 5122)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1050**

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -D\_FILE\_OFFSET\_BITS=64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32  
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(3.60 GHz, Intel Xeon Gold 5122)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1050**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Sep-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(3.60 GHz, Intel Xeon Gold 5122)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1050**

**CPU2006 license:** 9017

**Test date:** Sep-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 27 12:05:58 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 December 2017.