



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Synergy 480 Gen10  
(1.70 GHz, Intel Xeon Bronze 3104)

**SPECint®2006 = Not Run**

**SPECint\_base2006 = 35.4**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

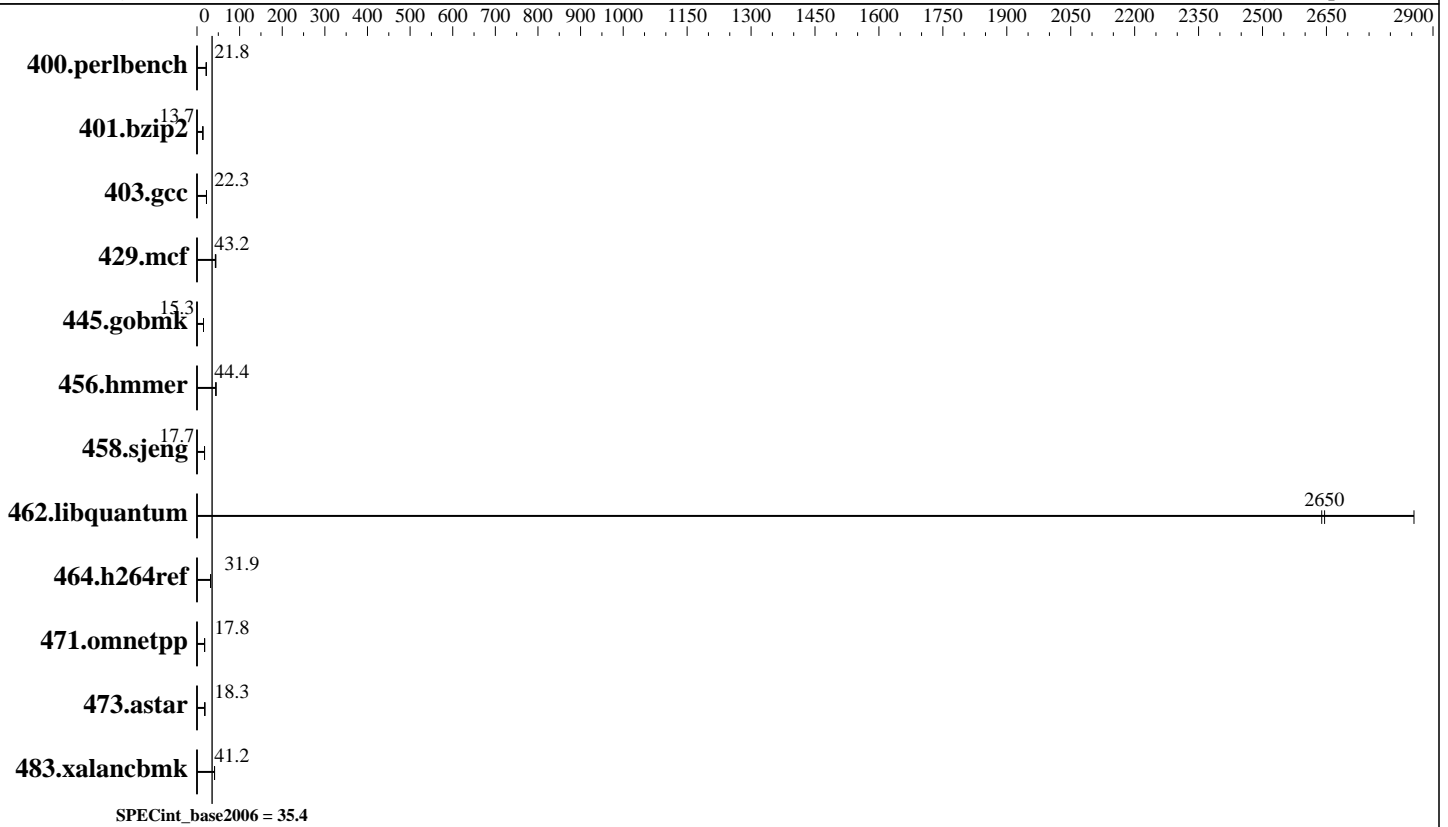

## Hardware

CPU Name: Intel Xeon Bronze 3104  
 CPU Characteristics:  
 CPU MHz: 1700  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1, 2 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 8.25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R, running at 2133)  
 Disk Subsystem: 1 x 480 GB SATA SSD, RAID 0  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 Kernel 3.10.0-514.el7.x86\_64  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(1.70 GHz, Intel Xeon Bronze 3104)

SPECint2006 =

Not Run

SPECint\_base2006 =

35.4

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>449</b>	<b>21.8</b>	449	21.8	449	21.8						
401.bzip2	705	13.7	706	13.7	<b>706</b>	<b>13.7</b>						
403.gcc	<b>362</b>	<b>22.3</b>	361	22.3	362	22.2						
429.mcf	<b>211</b>	<b>43.2</b>	206	44.3	211	43.2						
445.gobmk	687	15.3	<b>688</b>	<b>15.3</b>	688	15.2						
456.hammer	<b>210</b>	<b>44.4</b>	211	44.2	210	44.4						
458.sjeng	685	17.7	685	17.7	<b>685</b>	<b>17.7</b>						
462.libquantum	7.85	2640	<b>7.83</b>	<b>2650</b>	7.26	2860						
464.h264ref	696	31.8	694	31.9	<b>694</b>	<b>31.9</b>						
471.omnetpp	352	17.8	349	17.9	<b>351</b>	<b>17.8</b>						
473.astar	384	18.3	<b>385</b>	<b>18.3</b>	385	18.2						
483.xalancbmk	<b>168</b>	<b>41.2</b>	167	41.2	168	41.1						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
IRQ balance service was stop using "service irqbalance stop"  
Tuned-adm profile was set to Throughput-Performance

## Platform Notes

BIOS Configuration:  
Thermal Configuration set to Maximum Cooling  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Memory Patrol Scrubbing set to Disabled  
Workload Profile set to General Peak Frequency Compute  
Energy/Performance Bias set to Maximum Performance  
Workload Profile set to Custom  
NUMA Group Size Optimization set to Flat  
Sysinfo program /home/cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on SY480\_Hjp\_RHEL Sat Dec 9 13:40:23 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Synergy 480 Gen10  
(1.70 GHz, Intel Xeon Bronze 3104)

**SPECint2006 = Not Run**

**SPECint\_base2006 = 35.4**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

model name : Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz

2 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 6

physical 0: cores 0 1 2 3 4 5

physical 1: cores 0 1 2 3 4 5

cache size : 8448 KB

From /proc/meminfo

MemTotal: 395933616 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.3 (Maipo)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="7.3"

PRETTY\_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"

ANSI\_COLOR="0;31"

CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.3:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.3:ga:server

uname -a:

Linux SY480\_Hjp\_RHEL 3.10.0-514.el7.x86\_64 #1 SMP Wed Oct 19 11:24:13 EDT

2016 x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Dec 9 13:36

SPEC is set to: /home/cpu2006

Filesystem Type Size Used Avail Use% Mounted on

/dev/mapper/rhel-home xfs 392G 29G 363G 8% /home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I42 09/27/2017

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz, configured at 2133 MHz

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 480 Gen10**  
(1.70 GHz, Intel Xeon Bronze 3104)

**SPECint2006 = Not Run**

**SPECint\_base2006 = 35.4**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
-auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh10.2 -lsmarthep64



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 480 Gen10**  
(1.70 GHz, Intel Xeon Bronze 3104)

**SPECint2006 = Not Run**

**SPECint\_base2006 = 35.4**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jan 16 12:09:53 2018 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 January 2018.