



SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6128, 3.40 GHz)

SPECint®2006 = 75.7

SPECint_base2006 = 72.1

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Jun-2017

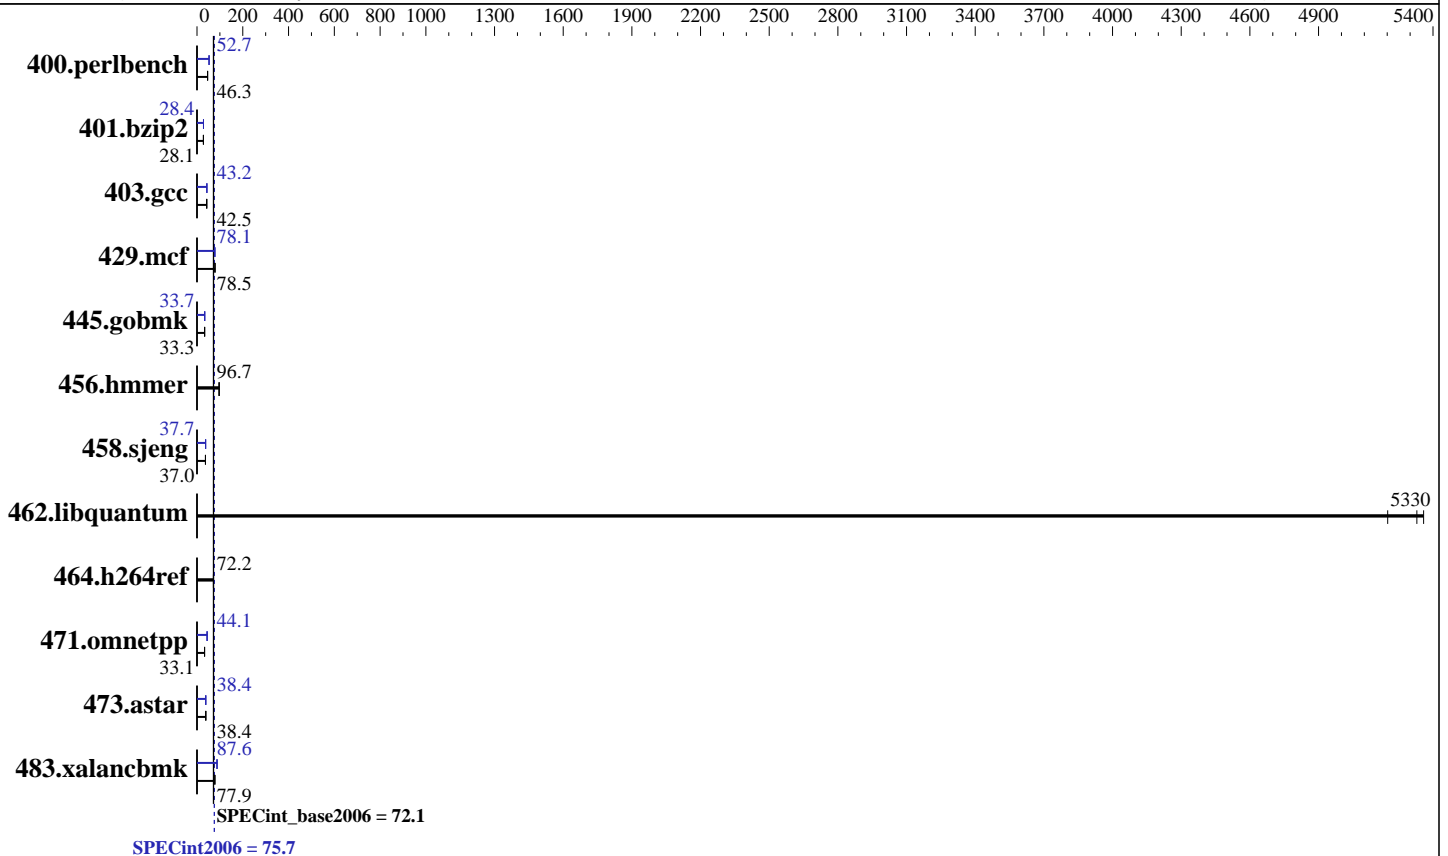

Hardware

CPU Name: Intel Xeon Gold 6128
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 3400
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: 19.25 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)
Disk Subsystem: 1 x 600 GB SAS HDD, 10K RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 3.10.0-514.el7.x86_64
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6128, 3.40 GHz)

SPECint2006 = **75.7**

SPECint_base2006 = **72.1**

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Dec-2017
Hardware Availability: Aug-2017
Software Availability: Jun-2017

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>211</u>	<u>46.3</u>	210	46.5	212	46.2	185	52.8	<u>185</u>	<u>52.7</u>	186	52.7
401.bzip2	344	28.1	<u>344</u>	<u>28.1</u>	344	28.0	<u>340</u>	<u>28.4</u>	340	28.4	341	28.3
403.gcc	189	42.6	<u>189</u>	<u>42.5</u>	190	42.4	186	43.2	<u>187</u>	<u>43.2</u>	187	43.0
429.mcf	<u>116</u>	<u>78.5</u>	115	79.1	117	77.9	116	78.6	<u>117</u>	<u>78.1</u>	118	77.2
445.gobmk	315	33.4	315	33.3	<u>315</u>	<u>33.3</u>	311	33.7	311	33.7	<u>311</u>	<u>33.7</u>
456.hammer	<u>96.5</u>	<u>96.7</u>	96.3	96.9	96.6	96.6	<u>96.5</u>	<u>96.7</u>	96.3	96.9	96.6	96.6
458.sjeng	327	37.0	<u>327</u>	<u>37.0</u>	327	37.0	321	37.7	321	37.7	<u>321</u>	<u>37.7</u>
462.libquantum	3.98	5200	3.87	5360	<u>3.89</u>	<u>5330</u>	3.98	5200	3.87	5360	<u>3.89</u>	<u>5330</u>
464.h264ref	309	71.6	<u>306</u>	<u>72.2</u>	306	72.2	309	71.6	<u>306</u>	<u>72.2</u>	306	72.2
471.omnetpp	189	33.1	189	33.0	<u>189</u>	<u>33.1</u>	141	44.3	142	44.1	<u>142</u>	<u>44.1</u>
473.astar	<u>183</u>	<u>38.4</u>	183	38.3	183	38.4	<u>183</u>	<u>38.4</u>	184	38.2	183	38.4
483.xalancbmk	<u>88.6</u>	<u>77.9</u>	88.6	77.9	88.5	77.9	<u>78.7</u>	<u>87.6</u>	78.4	88.0	79.4	86.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
 Intel HyperThreading Technology set to Disabled
 CPU performance set to Enterprise
 Power Performance Tuning set to OS Controls
 SNC set to Disabled
 Patrol Scrub set to Disabled
 Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on RHEL.116 Fri Dec 22 07:29:40 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
 model name : Intel(R) Xeon(R) Gold 6128 CPU @ 3.40GHz
 2 "physical id"s (chips)
 12 "processors"
 cores, siblings (Caution: counting these is hw and system dependent. The
 Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6128, 3.40 GHz)

SPECint2006 = 75.7

SPECint_base2006 = 72.1

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Jun-2017

Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 6
physical 0: cores 0 6 9 10 11 13
physical 1: cores 0 6 9 10 11 13
cache size : 19712 KB
```

From /proc/meminfo

```
MemTotal:      394679120 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME=OpenStack
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

uname -a:

```
Linux RHEL.116 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 22 07:25

SPEC is set to: /home/cpu2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5        xfs   503G  42G  461G   9% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C220M5.3.1.1d.0.0615170645 06/15/2017 Cisco Systems, Inc. C220M5.3.1.1d.0.0615170645 06/15/2017

Memory:

48x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

The correct amount of Memory installed is 384 GB (24 x 16 GB) and the dmidecode is reporting invalid number of DIMMs installed
Installed Memory:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6128, 3.40 GHz)

SPECint2006 = 75.7

SPECint_base2006 = 72.1

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Jun-2017

Platform Notes (Continued)

24x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"

OMP_NUM_THREADS = "12"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6128, 3.40 GHz)

SPECint2006 = 75.7

SPECint_base2006 = 72.1

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Jun-2017

Base Portability Flags (Continued)

```

403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64

```

Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

```

```

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

```

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

C++ benchmarks (except as noted below):

```

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

```

473.astar: icpc -m64

```



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6128, 3.40 GHz)

SPECint2006 = 75.7

SPECint_base2006 = 72.1

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Jun-2017

Peak Portability Flags

```

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div -auto-ilp32 -qopt-prefetch

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
          -qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
          -qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2)

456.hmmer: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

```

C++ benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6128, 3.40 GHz)

SPECint2006 = 75.7

SPECint_base2006 = 72.1

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Jun-2017

Peak Optimization Flags (Continued)

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Feb 26 10:21:42 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 February 2018.