



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Synergy 480 Gen10  
(2.60 GHz, Intel Xeon Gold 6126)

**SPECint®\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1290**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

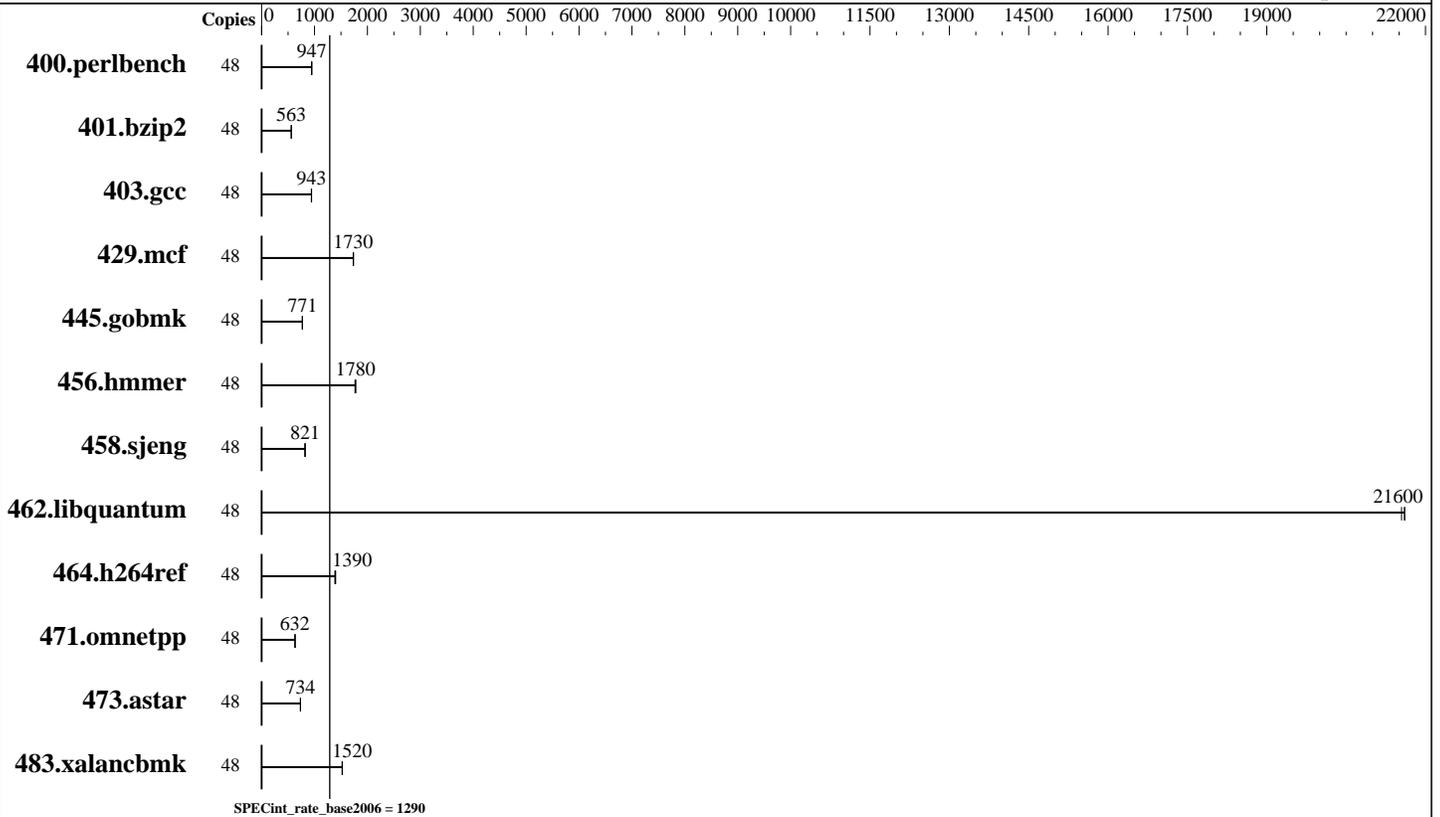

## Hardware

CPU Name: Intel Xeon Gold 6126  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 19.25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 960 GB SATA SSD, RAID 0  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP2  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: Not Applicable  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.60 GHz, Intel Xeon Gold 6126)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 1290

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	496	946	<b>495</b>	<b>947</b>	495	948							
401.bzip2	48	<b>823</b>	<b>563</b>	823	563	827	560							
403.gcc	48	409	944	411	940	<b>410</b>	<b>943</b>							
429.mcf	48	<b>252</b>	<b>1730</b>	252	1740	253	1730							
445.gobmk	48	654	770	<b>653</b>	<b>771</b>	653	771							
456.hammer	48	254	1770	<b>252</b>	<b>1780</b>	252	1780							
458.sjeng	48	707	821	706	823	<b>707</b>	<b>821</b>							
462.libquantum	48	46.2	21500	<b>46.0</b>	<b>21600</b>	46.0	21600							
464.h264ref	48	767	1390	759	1400	<b>762</b>	<b>1390</b>							
471.omnetpp	48	475	632	<b>475</b>	<b>632</b>	475	632							
473.astar	48	460	733	458	735	<b>459</b>	<b>734</b>							
483.xalancbmk	48	217	1520	217	1530	<b>217</b>	<b>1520</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
irqbalance disabled with "systemctl stop irqbalance"  
tuned profile set with "tuned-adm profile throughput-performance"  
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"  
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

## Platform Notes

BIOS Configuration:  
Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Workload Profile set to General Throughput Compute  
Minimum Processor Idle Power Core C-State set to C1E State  
Sysinfo program /home/cpu2006/config/sysinfo.rev6993

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Synergy 480 Gen10  
(2.60 GHz, Intel Xeon Gold 6126)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1290**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-vjuij Tue Dec 19 13:49:49 2017

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6126 CPU @ 2.60GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings  : 24
  physical 0: cores 0 1 3 5 6 8 9 10 11 12 13 14
  physical 1: cores 0 2 3 4 5 8 9 10 11 12 13 14
cache size : 19712 KB
```

```
From /proc/meminfo
MemTotal:      395926636 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-vjuij 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 19 13:36
```

```
SPEC is set to: /home/cpu2006
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Synergy 480 Gen10  
(2.60 GHz, Intel Xeon Gold 6126)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1290**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	852G	72G	780G	9%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I42 09/27/2017

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.htm>.

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.60 GHz, Intel Xeon Gold 6126)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 1290

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
 403.gcc: -D\_FILE\_OFFSET\_BITS=64  
 429.mcf: -D\_FILE\_OFFSET\_BITS=64  
 445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
 456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
 458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
 462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
 471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
 473.astar: -D\_FILE\_OFFSET\_BITS=64  
 483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Synergy 480 Gen10  
(2.60 GHz, Intel Xeon Gold 6126)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1290**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jun 14 11:29:52 2018 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 June 2018.